

FMUSER FUQ-4514 DVB-S-S2-S2X Modulator 4 ASI + 1 IP Input to RF Output DVB-S-S2-S2X Standards BISS Scrambling Satellite Broadcasting Product overview



The FMUSER FUQ-4514 is a DVB-S/S2/S2X modulator with 4 ASI inputs and 1 IP input, outputting RF signals. It converts ASI and IP inputs to digital RF output, featuring BISS scrambling for secure distribution. Controlled via NMS software and LCD, it supports broadcasting and satellite applications.

Key feature

Supports full compliance with DVB-S, DVB-S2, and DVB-S2X standards (EN300 421, EN302 307, EN302 307-2).


Features 4 ASI inputs with backup and 1 IP input (1000/100M) for flexible re-muxing.

Includes BISS scrambling (Mode 0/1/E) for secure content distribution.

Offers Web-server NMS for local/remote control and SFN TS transmission support.

Equipped with constant temperature crystal oscillator (0.1ppm stability) and 24V power output via RF port.

Principle Chart

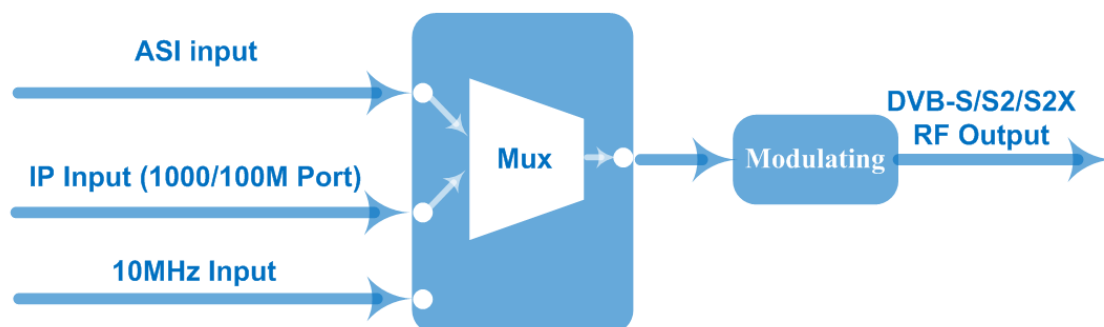

Specifications

ASI Input	Supporting both 188/204 Byte Packet TS Input	Supporting both 188/204 Byte Packet TS Input	Supporting both 188/204 Byte Packet TS Input	Supporting both 188/204 Byte Packet TS Input	Supporting both 188/204 Byte Packet TS Input
ASI Input	4 ASI Inputs, Supporting Backup	4 ASI Inputs, Supporting Backup	4 ASI Inputs, Supporting Backup	4 ASI Inputs, Supporting Backup	4 ASI Inputs, Supporting Backup
ASI Input	Connector: BNC, Impedance 75Ω	Connector: BNC, Impedance 75Ω	Connector: BNC, Impedance 75Ω	Connector: BNC, Impedance 75Ω	Connector: BNC, Impedance 75Ω
IP Input	1*IP Input (RJ45, 1000/100M TS Over UDP)	1*IP Input (RJ45, 1000/100M TS Over UDP)	1*IP Input (RJ45, 1000/100M TS Over UDP)	1*IP Input (RJ45, 1000/100M TS Over UDP)	1*IP Input (RJ45, 1000/100M TS Over UDP)
10MHz Input	1*10MHz Input (BNC Interface)	1*10MHz Input (BNC Interface)	1*10MHz Input (BNC Interface)	1*10MHz Input (BNC Interface)	1*10MHz Input (BNC Interface)
Multiplexing	Maximum PID Remapping	Maximum PID Remapping	Maximum PID Remapping	128 input per channel	128 input per channel
Multiplexing	Function	Function	Function	PID remapping (automatically or manually)	PID remapping (automatically or manually)
Multiplexing	Function	Function	Function	Accurate PCR adjusting	Accurate PCR adjusting
Multiplexing	Function	Function	Function	Edit PSI/SI tables (PAT/PM T/SDT/CAT/NIT)	Edit PSI/SI tables (PAT/PM T/SDT/CAT/NIT)
RF Output	RF Range: 950 ~ 2150 MHz, 10KHz step	RF Range: 950 ~ 2150 MHz, 10KHz step	RF Range: 950 ~ 2150 MHz, 10KHz step	RF Range: 950 ~ 2150 MHz, 10KHz step	RF Range: 950 ~ 2150 MHz, 10KHz step
RF Output	Output Level Attenuation: -27.5 dBm ~ -1.5 dBm, 0.5dB Step	Output Level Attenuation: -27.5 dBm ~ -1.5 dBm, 0.5dB Step	Output Level Attenuation: -27.5 dBm ~ -1.5 dBm, 0.5dB Step	Output Level Attenuation: -27.5 dBm ~ -1.5 dBm, 0.5dB Step	Output Level Attenuation: -27.5 dBm ~ -1.5 dBm, 0.5dB Step
RF Output	MER ≥ 40dB	MER ≥ 40dB	MER ≥ 40dB	MER ≥ 40dB	MER ≥ 40dB

RF Output	Connector: N type, impedance 50Ω	Connector: N type, impedance 50Ω	Connector: N type, impedance 50Ω	Connector: N type, impedance 50Ω	Connector: N type, impedance 50Ω
Channel Coding and Modulation	Standard	DVB-S	DVB-S	DVB-S2	DVB-S2X
Channel Coding and Modulation	Outer coding	RS Coding	RS Coding	BCH Coding	BCH Coding
Channel Coding and Modulation	Inner coding	Convolution	Convolution	LDPC Coding	LDPC Coding
Channel Coding and Modulation	Constellation	QPSK	QPSK	QPSK, 8PSK, 16APSK, 32APSK	QPSK, 8PSK, 16APSK, 32APSK
Channel Coding and Modulation	FEC/ Convolution Rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10, 23/36, 25/36, 13/18 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9


Channel Coding and Modulation	Roll-off Factor	0.2,0.25,0.35	0.2,0.25,0.35	0.2, 0.25, 0.35	0.05, 0.10, 0.15, 0.2, 0.25, 0.35
Channel Coding and Modulation	Symbol Rate	0.05~45Msps	0.05~45Msps	0.05~40Msps (32APSK); 0.05~45Msps (QPSK/8PSK/16APSK)	0.05~40Msps (8APSK /32APSK) 0.05~45Msps (8PSK/QPSK/16APSK)
BISS Scramble	Mode 1, Mode E, Mode 0	Mode 1, Mode E, Mode 0	Mode 1, Mode E, Mode 0	Mode 1, Mode E, Mode 0	Mode 1, Mode E, Mode 0
System	Web-server NMS	Web-server NMS	Web-server NMS	Web-server NMS	Web-server NMS
System	Language: English	Language: English	Language: English	Language: English	Language: English
System	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade	Ethernet software upgrade
System	24V power output through RF output port	24V power output through RF output port	24V power output through RF output port	24V power output through RF output port	24V power output through RF output port
Miscellaneous	Dimensions	Dimensions	482mm×410mm×44mm	482mm×410mm×44mm	482mm×410mm×44mm
Miscellaneous	Temperature	Temperature	0~45℃(operation), -20~80℃(storage)	0~45℃(operation), -20~80℃(storage)	0~45℃(operation), -20~80℃(storage)
Miscellaneous	Power	Power	100-240VAC±10%,50Hz-60Hz	100-240VAC±10%,50Hz-60Hz	100-240VAC±10%,50Hz-60Hz

Order Guide

	FU-4513E	FU-4513F	FU-4514	FU-4514F
DVB-S/S2	●	●	●	●
DVB-S2X			●	●
RF output (950-2150MHz)	●		●	

IF output (50-960MHz)		●		●
------------------------	--	---	--	---

CID TEST SAMPLE ILLUSTRATION

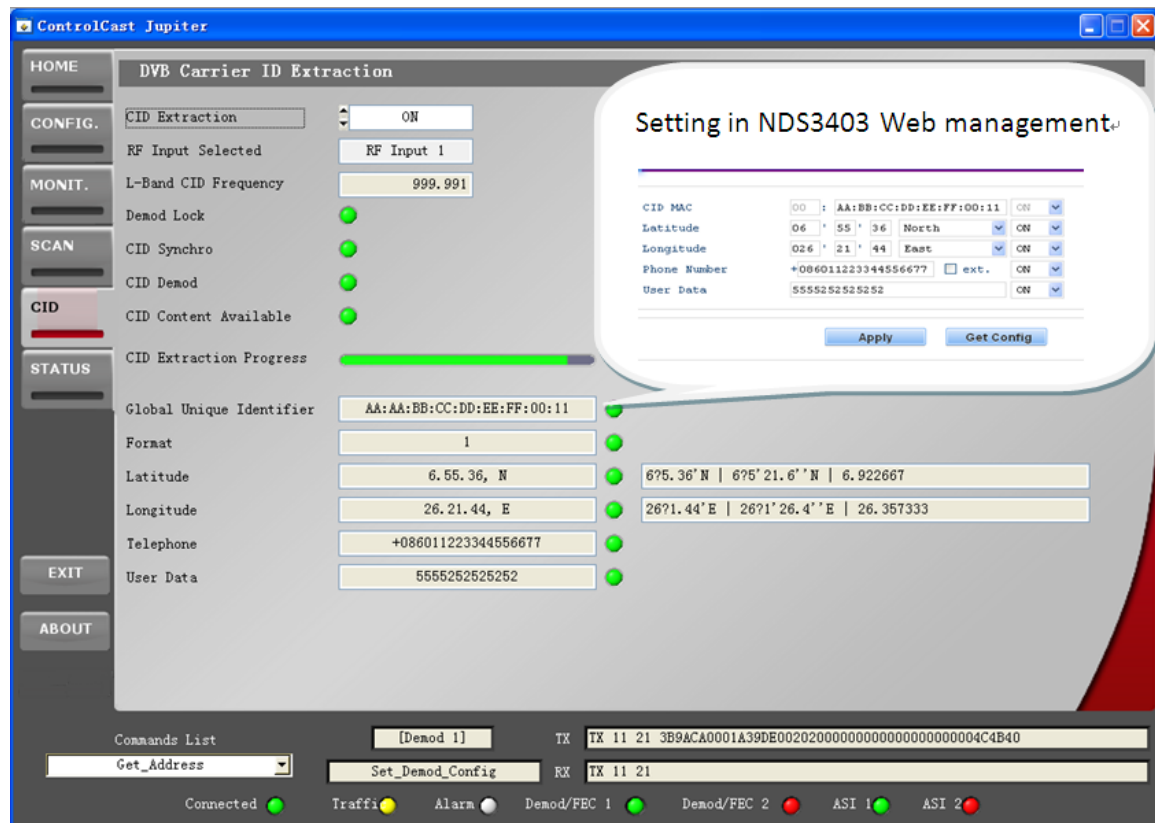

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)