


FMUSER FUQ-4633B HD Encoder Modulator HDMI Input to RF Output MPEG2 Encoding Multi-Standard DVB-C-T-ATSC-ISDB-T Modulation Web-NMS Control for TV Distribution and Surveillance



- ▶ HDMI ➡ DVB-C/DVB-T/ATSC/ISDB-T Encoder & Modulator
- ▶ DVB-C/T/ATSC/ISDB-T RF in one device, **Modulation dynamic switching**
- ▶ **Support CC (Closed Caption), EIA 608**
- ▶ **Support LCN**
- ▶ **Low cost**

--- Home Version

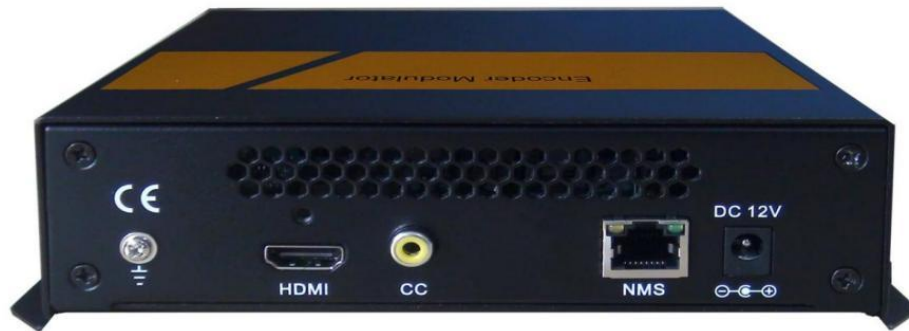

Version— I



Version— II

A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc...

Product overview

The FMUSER FUQ-4633D is an HD Encoder Modulator that accepts HDMI input signals and outputs RF signals. It performs MPEG2 encoding and modulation to convert audio/video signals into broadcast-ready formats. Available in compact sizes (e.g., 2031x144x52mm or 1801x103x9.5mm), it supports management via Web or NMS. Ideal for TV distribution in home entertainment, surveillance, and commercial applications.

Key feature

Supports MPEG2 video encoding at 1.000-20.000 Mbps and audio in MPEG1 layer 2, AAC, AC3 formats.


Features multi-standard modulation including DVB-C, DVB-T, ATSC, ISDB-T with RF frequency 100-1000MHz and level -63 to -16dBm.

Offers flexible management via Web or NMS, with upgrade options.


Accepts HDMI input from sources like STBs, satellite receivers, CCTV cameras.

Compact design with dimensions 203x144x52mm or 180x110x39.5mm for space efficiency.


System Connection

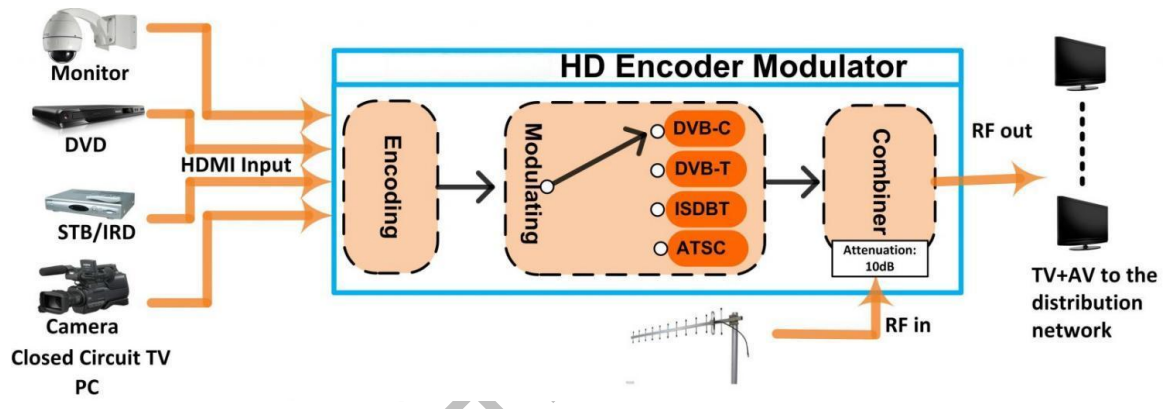

Version— I

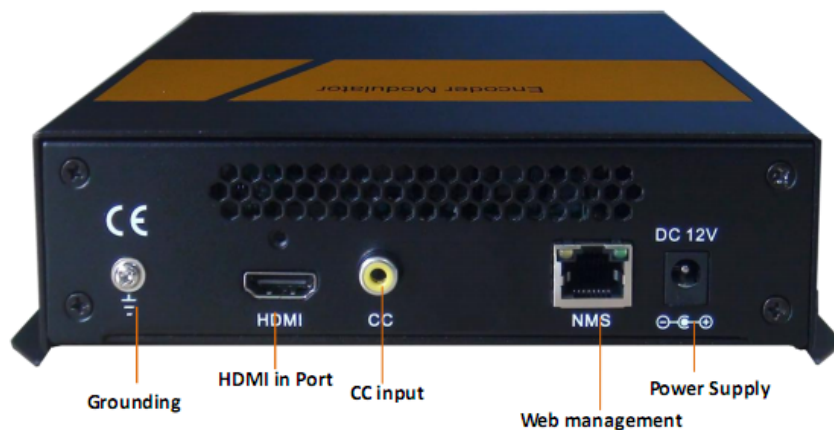

Version— II

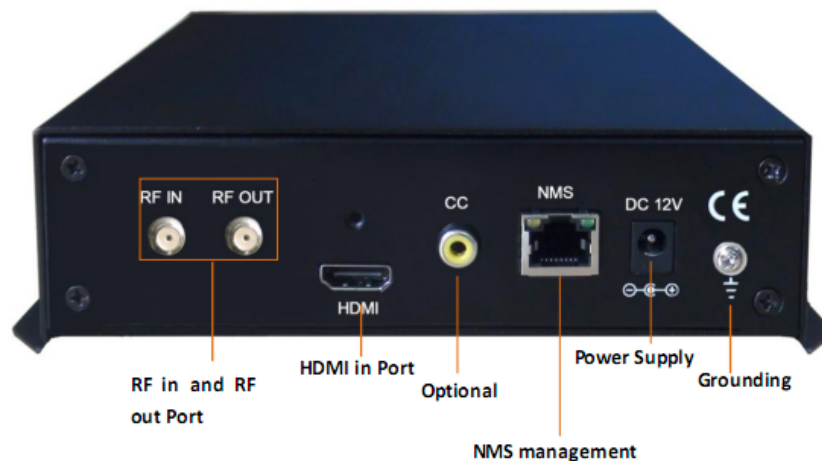

Technical Specifications

HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section
Video	Encoding	Encoding	Encoding	MPEG2	MPEG2
Video	Interface	Interface	Interface	HDMI*1	HDMI*1
Video	Input	Input	Input	Output	Output
Video	480@59.94/60i	480@59.94/60i	480@59.94/60i	480@30p	480@30p
Video	576@50i	576@50i	576@50i	576@25p	576@25p
Video	720@50/59.94/60p	720@50/59.94/60p	720@50/59.94/60p	720@25/30p	720@25/30p
Video	1080@50i	1080@50i	1080@50i	1080@25p	1080@25p
Video	1080@59.94/60i	1080@59.94/60i	1080@59.94/60i	1080@30p	1080@30p
Video	1080@50p	1080@50p	1080@50p	1080@25p	1080@25p
Video	1080@59.94/60p	1080@59.94/60p	1080@59.94/60p	1080@30p	1080@30p
Video	Aspect Ratio	Aspect Ratio	Aspect Ratio	16:9	16:9
Video	Bit rate	Bit rate	Bit rate	1.000~20.000 Mbps	1.000~20.000 Mbps
Audio	Encoding	Encoding	Encoding	MPEG1 layer 2, AAC, AC3	MPEG1 layer 2, AAC, AC3
Audio	Sample rate 48KHz	Sample rate 48KHz	Sample rate 48KHz	Sample rate 48KHz	Sample rate 48KHz
Audio	Bit rate	Bit rate	Bit rate	MPEG1 layer 2 ■192kbps■	MPEG1 layer 2 ■192kbps■
Audio	Bit rate	Bit rate	Bit rate	AAC ■VBR■	AAC ■VBR■
Audio	Bit rate	Bit rate	Bit rate	AC3 ■128kbps■	AC3 ■128kbps■
DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section

Standard	Standard	Standard	J.83A (DVB-C), J.83B	J.83A (DVB-C), J.83B	J.83A (DVB-C), J.83B
MER	MER	MER	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	RF frequency	100-1000MHz , 1KHz step	100-1000MHz , 1KHz step	100-1000MHz , 1KHz step
RF output level	RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
Symbol rate	Symbol rate	Symbol rate	3.000~7.000 Mpsps adjustable	3.000~7.000 Mpsps adjustable	3.000~7.000 Mpsps adjustable
		J.83A	J.83A	J.83A	J.83B
Constellation	Constellation	16/32/64/128/ 256 QAM	16/32/64/128/ 256 QAM	16/32/64/128/ 256 QAM	64/ 256 QAM
Bandwidth	Bandwidth	8M	8M	8M	6M
DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section
Standard	Standard	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM
Bandwidth	Bandwidth	2M, 3M, 4M, 5M, 6M, 7M, 8M (Version— ) 6M, 7M, 8M (Version— )	2M, 3M, 4M, 5M, 6M, 7M, 8M (Version— ) 6M, 7M, 8M (Version— )	2M, 3M, 4M, 5M, 6M, 7M, 8M (Version— ) 6M, 7M, 8M (Version— )	2M, 3M, 4M, 5M, 6M, 7M, 8M (Version— ) 6M, 7M, 8M (Version— )
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode:	Transmission Mode:	2K, 8K	2K, 8K	2K, 8K	2K, 8K
MER	MER	≥35dB	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	100-1000MHz , 1KHz step	100-1000MHz , 1KHz step	100-1000MHz , 1KHz step	100-1000MHz , 1KHz step

RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
ISDB Modulator Section	ISDB Modulator Section	ISDB Modulator Section	ISDB Modulator Section	ISDB Modulator Section	ISDB Modulator Section
Standard	Standard	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
RF frequency	RF frequency	100~1000MHz, 1KHz step	100~1000MHz, 1KHz step	100~1000MHz, 1KHz step	100~1000MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section
Standard	Standard	ATSC A/53	ATSC A/53	ATSC A/53	ATSC A/53
Constellation	Constellation	8 VSB	8 VSB	8 VSB	8 VSB
RF output level	RF output level	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step
MER	MER	≥35dB	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	100~1000MHz, 1KHz step	100~1000MHz, 1KHz step	100~1000MHz, 1KHz step	100~1000MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
System	System	System	System	System	System

Management	Management	Web (Version—■) NMS (Version—■)	Web (Version—■) NMS (Version—■)	Web (Version—■) NMS (Version—■)	Web (Version—■) NMS (Version—■)
Language	Language	English	English	English	English
Upgrade	Upgrade	Web update (Version—■) ST Link utility (Version—■)	Web update (Version—■) ST Link utility (Version—■)	Web update (Version—■) ST Link utility (Version—■)	Web update (Version—■) ST Link utility (Version—■)
General	General	General	General	General	General
Power supply	Power supply	DC 12V	DC 12V	DC 12V	DC 12V
Dimensions	Dimensions	203*144*52mm (Version—■) 180*110*39.5mm (Version—■)	203*144*52mm (Version—■) 180*110*39.5mm (Version—■)	203*144*52mm (Version—■) 180*110*39.5mm (Version—■)	203*144*52mm (Version—■) 180*110*39.5mm (Version—■)
Weight	Weight	< 1kg	< 1kg	< 1kg	< 1kg

Comparison

Device	CC input	Management	Upgrade
FU-4633C (Version—■)	√	Web	Web
FU-4633C (Version—■)	Optional	NMS	ST Link utility

...for communities of residents
an information channel on their television



...for restaurants
information about daily menus ,special deals,etc



...for hotels
meeting rooms,exhibitions,message,etc



...for hospitals
training courses, healthy guide, etc



...for Public Spaces
adversing,user information,news,etc



...for shopping centres
new collections,special deals,etc



**Create your own advertising and information
channel using only your Encoder Modulator**

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: [+8613922702227](https://wa.me/8613922702227)