

FMUSER FUQ-4667 Encoder Modulator 1 In 1 Out HDMI-DVB-C DVB-T ISDB-T ATSC Multi-Standard H.265-H.264 4K Encoding Modulation Streaming for Broadcast Hospitality



New Comer!



--- Home Version

A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc...




Support CC (Closed Caption) /Teletext
Support Audio delay function



Teletext Standard as per EN300706 & EN300472

This NDS3556 Encoder Modulator can support Teletext function to pushing text information such as domestic news, international news, sports news, weather forecasts, and TV program forecasts information etc.

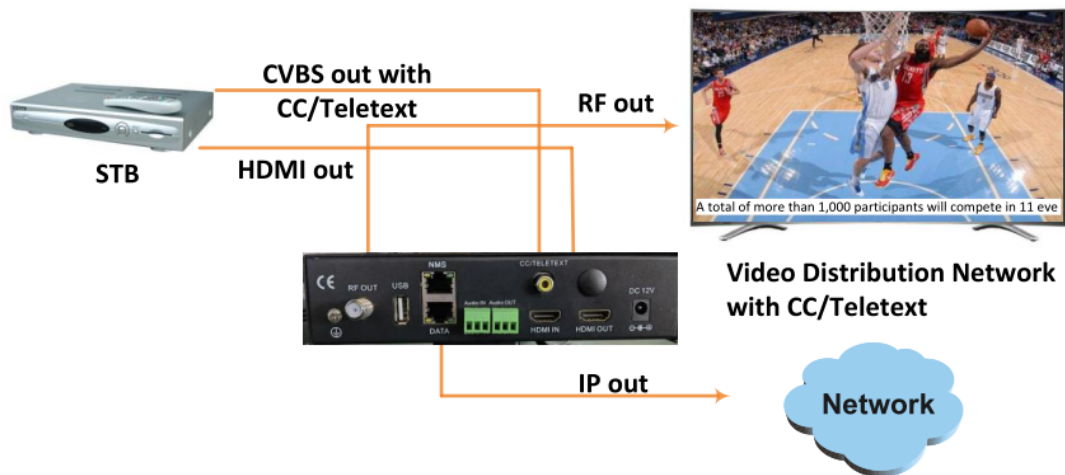


Product overview

The FMUSER FUQ-4667 encoder modulator converts HDMI inputs into DVB-C, DVB-T, ISDB-T, or ATSC RF outputs or IP streams using H.265 or H.264 encoding. It processes signals for 4K resolution with modulation to broadcast standards. This unit features an LCD screen for control, USB port for TS recording, and OSD insertion. Ideal for TV distribution, digital signage, and IP video applications.


Key feature

Includes Management Tools such as OSD insertion, TS recording via USB, and LCD screen control.

System Connection

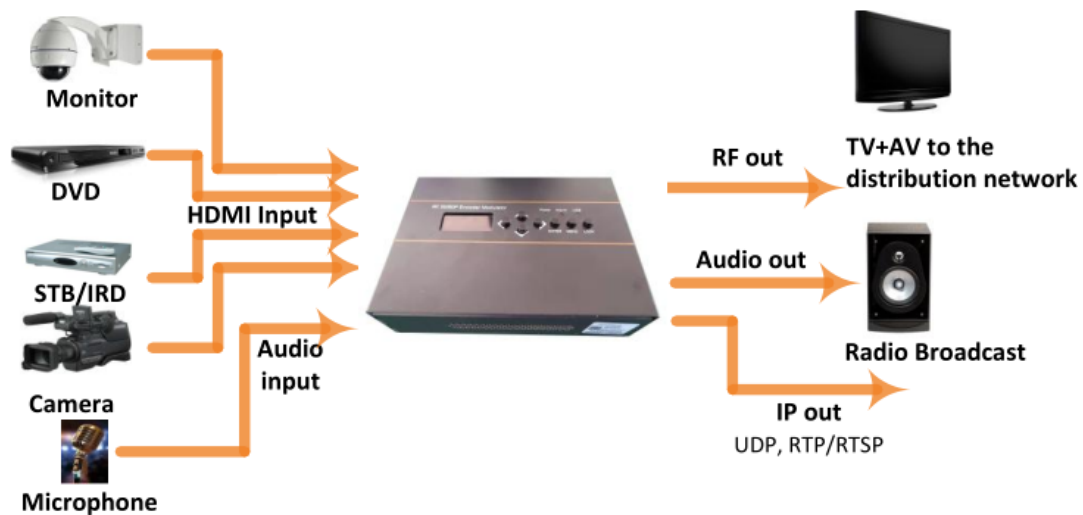

Appearance and Description

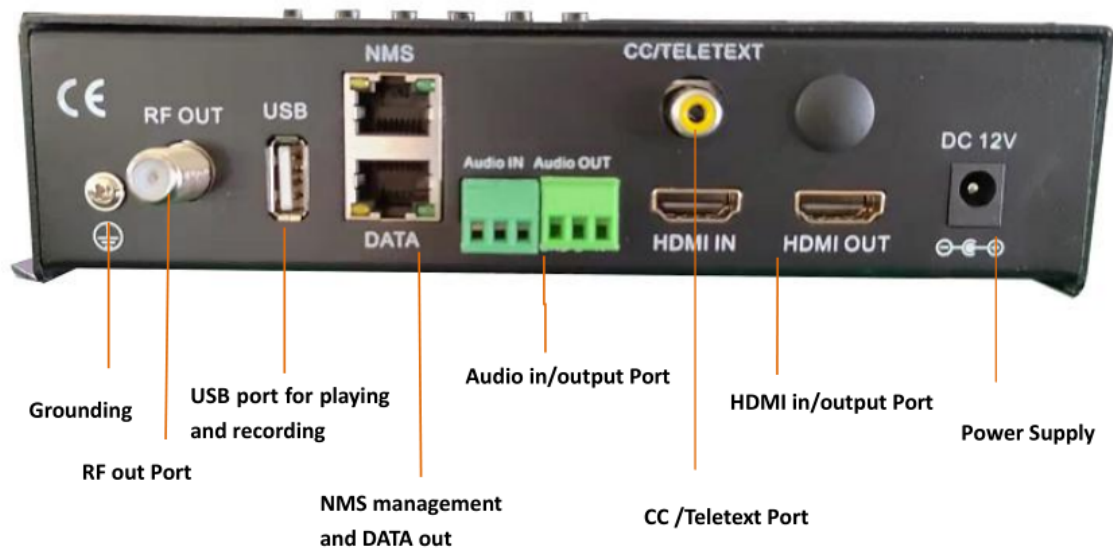

Technical Specifications

HDMI Encoding Section	HDMI Encoding Section	HDMI Encoding Section
Video	Encoding	HEVC/ H.265 , MPEG 4 AVC/H.264
Video	Interface	HDMI*1. HDMI loop out*1
Video	Resolution	3840*2160_60/50P(H.265 only), 1920*1080_60/59.94/50P, 1280*720_60/59.94/50P,
Video	Chroma	Input:4:4:4/4:2:2; output:4:2:0
Video	Bitrate	2Mbps~20Mbps
Video	Rate Control	CBR/VBR
Video	GOP Structure	IBBP, IPPP
Audio	Encoding Format	MPEG-1 Layer 2, LC-AAC, HE-AAC, HE-AAC V2; AC3 Pass-through
Audio	Sample rate	32KHz,44.1KHz,48KHz
Audio	Bit-rate	48Kbps~384Kbps (MPEG-1 Layer 2 & LC-AAC) 24 Kbps~128 Kbps (HE-AAC) 18 Kbps~56 Kbps (HE-AAC V2)

IP output	IP output	IP output	IP output	IP output
-----------	-----------	-----------	-----------	-----------

IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M/1000M self-adaptive)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M/1000M self-adaptive)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M/1000M self-adaptive)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M/1000M self-adaptive)	IP out over UDP (Unicast/multicast), RTP/RTSP, (RJ45, 100M/1000M self-adaptive)
DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section	DVB-C Modulator Section
Standard	Standard	Standard	J.83A (DVB-C), J.83B	J.83A (DVB-C), J.83B
MER	MER	MER	≥40dB	≥40dB
RF frequency	RF frequency	RF frequency	100-1000MHz, 1KHz step	100-1000MHz, 1KHz step
RF output level	RF output level	RF output level	-20~-5dBm, 1dB step	-20~-5dBm, 1dB step
Symbol rate	Symbol rate	Symbol rate	5.000~7.000Mps adjustable	5.000~7.000Mps adjustable
	J.83A	J.83A	J.83A	J.83B
Constellation	16/32/64/128/256 QAM	16/32/64/128/256 QAM	16/32/64/128/256 QAM	64/ 256 QAM
Bandwidth	8M	8M	8M	6M
DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section	DVB-T Modulator Section
Standard	Standard	DVB-T COFDM	DVB-T COFDM	DVB-T COFDM
Bandwidth	Bandwidth	6M, 7M, 8M	6M, 7M, 8M	6M, 7M, 8M
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode:	Transmission Mode:	2K, 8K	2K, 8K	2K, 8K
MER	MER	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	100-900MHz, 1KHz step	100-900MHz, 1KHz step	100-900MHz, 1KHz step

RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section	ISDB-T Modulator Section
Standard	Standard	ARIB STD-B31	ARIB STD-B31	ARIB STD-B31
Constellation	Constellation	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM	QPSK, 16QAM, 64QAM
Guard Interval	Guard Interval	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4	1/32, 1/16, 1/8, 1/4
Transmission Mode	Transmission Mode	2K, 4K, 8K	2K, 4K, 8K	2K, 4K, 8K
Code rate	Code rate	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8	1/2, 2/3, 3/4, 5/6, 7/8
RF frequency	RF frequency	100~900MHz, 1KHz step	100~900MHz, 1KHz step	100~900MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1d B step	-63~ -16dBm, 1d B step	-63~ -16dBm, 1d B step
ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section	ATSC Modulator Section
Standard	Standard	ATSC A/53	ATSC A/53	ATSC A/53
Constellation	Constellation	8 VSB	8 VSB	8 VSB
RF output level	RF output level	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step	-63~-16dBm (44~91 dBμV), 1dB step
MER	MER	≥35dB	≥35dB	≥35dB
RF frequency	RF frequency	100~900MHz, 1KHz step	100~900MHz, 1KHz step	100~900MHz, 1KHz step
RF output level	RF output level	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step	-63~ -16dBm, 1dB step
System	System	System	System	System
Management	Management	Web-GUI, LED+Keyboard	Web-GUI, LED+Keyboard	Web-GUI, LED+Keyboard
Language	Language	English	English	English
Upgrade	Upgrade	Web update	Web update	Web update
General	General	General	General	General

Power supply	Power supply	DC 12V	DC 12V	DC 12V
Dimensions	Dimensions	203*144*52mm	203*144*52mm	203*144*52mm
Weight	Weight	< 1kg	< 1kg	< 1kg

About Us

FMUSER is a company specializing in broadcasting and television transmission systems and integrating hotel IPTV systems. The company was established in 2009 and has served over 180 countries worldwide. More than 20,000 television stations, radio stations, and hotel clients from different.

Contact:Tomleequan Email■sales@fmuser.com whatsapp: +8613922702227