


EXPERIMENT-8B

AIM:-

b) Configuration of Wireless LAN using CISCO Packet Tracer.

Design a topology with three PCs connected from Linksys Wireless routers.

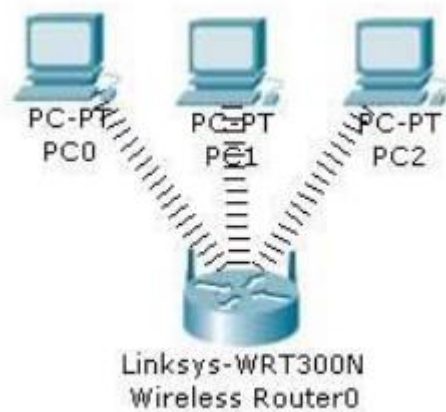

Perform following configuration:-

- ☐ Configure Static IP on PC and Wireless Router
- ☐ Set SSID to MotherNetwork
- ☐ Set IP address of router to 192.168.0.1, PC0 to 192.168.0.2, PC1 to 192.168.0.3 and PC2 to 192.168.0.4.
- ☐ Secure your network by configuring WAP key on Router
- ☐ Connect PC by using WAP key

RESULT:

The Configuration of Wireless LAN using CISCO Packet Tracer has been executed successfully.

