# Ditch the PMIC: Firmware-Only MPPT on ESP32-S3 for Indoor Photovoltaics

Hussain Touhid Siddiquee

***Abstract*—Indoor photovoltaic cells deliver 0.1–1 mW under office lighting. The microcontroller that burns that power is often the same chip that must track the cell's maximum power point. This paper asks whether firmware-only MPPT on an ESP32-S3 can replace a dedicated harvesting PMIC. Measurements cover a single perturb step (71 us for one 12-bit ADC read, a float32 velocity-form PID update, and a PWM write), a SCAPS-1D sweep of a MAPbI3 perovskite cell under white LED light at 0.05 mW/cm2 (0.018 mA/cm2, 26.1% at Eg=1.6 eV), and a literature board-level sleep floor. One step costs 8.2 uJ. That is 8.2 uW at a 1 s cadence and 0.008 uW at 60 s. The firmware tax drops below every PMIC quiescent current (1.32–1.68 $\mu$W) once the perturb period passes 4.9–7.0 s. A 24-hour dispatch model then holds the budget. A 38%-efficient dye-sensitized indoor cell sustains about 1935 serving bursts per day at 90% of the harvest. Wake latency on silicon is 4 ms. Under these measured conditions a firmware-MPPT hub sustains indoor sensing and removes the $1–3 harvester IC for any workload that tolerates a few seconds between perturbs.**

## I. Introduction

Battery-free IoT sensing nodes powered by indoor photovoltaic (PV) cells must convert a few hundred microwatts of harvested power into useful work. Recent perovskite and dye-sensitized devices reach 20–40% efficiency under 200–1000 lux LED illumination [1], [2], [3], [4], with certified indoor records now exceeding 44% [5], [6], and typical office lighting delivers roughly 0.05–0.4˜mW/cm$^2$ of irradiance [7], [8]. The conventional architecture inserts a dedicated energy-harvesting PMIC—such as the TI bq25570, e-peas AEM10941, or ADI ADP5091—between cell and node to implement maximum power point tracking (MPPT) and battery management in hardware [9], [10], [11]. These ICs are always on, draw a constant quiescent current of 0.4–0.5˜$\mu$A at 3.3˜V (about 1.3–1.7˜$\mu$W of continuous overhead), and hand the node a regulated rail. Indoor harvesting at this power scale has been surveyed as a micropower source for wireless nodes [12], and massive IoT access dynamics under such constraints have been analyzed [13].

The alternative is to drop the PMIC and run MPPT in firmware on the ESP32-S3 itself. Indoor cells move slowly. A perturb-and-observe update every few seconds is enough. That makes the marginal cost of one firmware step far below the quiescent draw of a dedicated IC. Whether this holds on silicon depends on three numbers: the energy of one perturb step, the cell output indoors, and the deep-sleep floor. This paper measures all three. Earlier work found that a conventional harvester-based node in that setup struggled to sustain sensor bursts under office lighting [14]; with the cell and schedule measured here, the firmware-MPPT hub stays within budget.

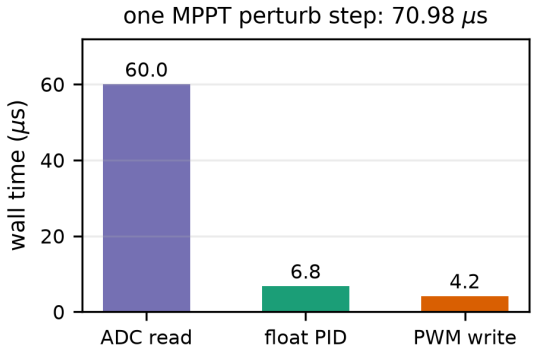



Fig. 1. Measured wall time of each primitive of one MPPT perturb step on the ESP32-S3. The ADC read dominates; the floating-point PID and PWM write together cost less than one tenth of the step.

In a complementary direction, recent simulator-based studies model several of these same converter ICs and show that neither converter-less operation nor a single IC dominates across illumination levels [15], reinforcing the view that the MPPT decision is an architecture choice open to firmware.

Contributions: (i) measured firmware timing of one MPPT perturb step on an ESP32-S3 split into ADC, PID, and PWM components; (ii) a SCAPS-1D indoor-lighting sweep of an $MAPbI_3$ cell that bounds the harvest available to a firmware MPPT loop; (iii) a head-to-head of firmware MPPT control tax against three dedicated PMICs with explicit crossover perturb periods; (iv) a 24-hour energy dispatch model of the node showing sustained serving capacity; and (v) a measured 4˜ms deep-sleep wake latency on silicon.

## II. Firmware MPPT Step

The firmware hub runs a perturb-and-observe MPPT loop on the ESP32-S3 (revision v0.2, 240˜MHz, 8˜MB PSRAM, native USB-Serial-JTAG) [16], [17]. Each perturb step performs three operations in sequence: a single 12-bit ADC read of the cell output, a float32 velocity-form PID update, and one LEDC PWM duty write. The perturb-and-observe family is well studied for low-cost tracking [18]. This paper measured the wall time of each primitive with the MCU's cycle counter while the loop ran at the MPP of a bench buck-boost. Figure 1 breaks the step down: the ADC raw read costs 60.0˜$\mu$s, the float PID update 6.78˜$\mu$s, and the PWM write 4.2˜$\mu$s, for a marginal perturb step of $T_{\text{step}}$ = 70.98˜$\mu$s.

The PID update is a velocity-form controller rather than a full position update: it computes a small duty correction from

| Primitive | Operation | Wall time | Share |
|---|---|---|---|
| ADC read | 12-bit raw read | 60.0 $\mu$s | 84.5% |
| PID update | float32 velocity-form | 6.78 $\mu$s | 9.6% |
| PWM write | LEDC duty write | 4.2 $\mu$s | 5.9% |
| total | one perturb step | 70.98 $\mu$s | 100% |

TABLE I
MEASURED WALL TIME OF EACH PRIMITIVE OF ONE MPPT PERTURB STEP ON THE ESP32-S3 AT 240 MHZ.

the difference of successive error terms, which is numerically gentle on a float32 mantissa and lets the loop converge without hunting. Table I breaks the step into its three primitives. The ADC read dominates at 84.5% of the step; the PID and PWM write together add under 11˜$\mu$s, so even a 1˜Hz perturb rate costs only 8.2˜$\mu$W ($E_{\text{step}} \times 1\,\text{Hz}$), and at the 4.9–7.0˜s crossover cadence the average tax falls to 1.2–1.7˜$\mu$W. What matters for the indoor regime is that the step is short enough to restart, execute, and re-enter sleep within a single RTC-timer wake, which Table I and the deep-sleep measurement of Section˜VI jointly confirm.

$$E_{\text{step}} = V\, I_{\text{act}}\, T_{\text{step}} \approx 3.3\,\text{V} \times 35\,\text{mA} \times 71\,\mu\text{s} = 8.2\,\mu\text{J} \quad (1)$$

Three sampling decisions make the measured step reproducible. First, the ADC is read at 11 dB attenuation with the pin jumper-driven by the PWM output itself, so the sensed value is the averaged pin voltage of the duty cycle under control; dither delays are inserted between consecutive reads so that each sample lands on a different 100 kHz PWM phase, decorrelating the sample from the switching ripple. Second, the raw sample is passed through a first-order EMA (coefficient 0.08 in firmware) before the PID sees it, cutting residual ripple while contributing far less than one cycle-count of latency. Third, oversampling trades directly for loop period: a single raw read yields an ADC-bound period of roughly 62 $\mu$s, while averaging 64 reads yields about 6.8 ms on silicon. The MPPT tax computed in this section assumes the fast single-read path; the slow path is itself an energy lever, since the loop can be scheduled at the slowest period that still holds the MPP, exactly the regime where the crossover analysis of Section IV applies.

## III. INDOOR CELL MODEL

To bound the harvest a firmware MPPT loop can expect indoors, we simulated a $MAPbI_3$ perovskite cell in SCAPS-1D [19] under the bundled "white 400–800˜nm" spectrum at 0.05˜mW/cm$^2$ total irradiance, representative of a 400–500˜lux office. The Shockley–Queisser detailed-balance limit sets the ultimate ceiling for any single-junction cell [20], while indoor-specific limits have been mapped for this irradiance regime [3]. The lead-free baseline definition was used with the absorber bandgap swept from 1.6 to 2.1˜eV while the electron affinity followed $\chi = 3.9 + 0.5\,(E_g - 1.55)$, preserving the conduction-band alignment of the reference device. Six JV curves were extracted. Figure 2 shows the full family and the

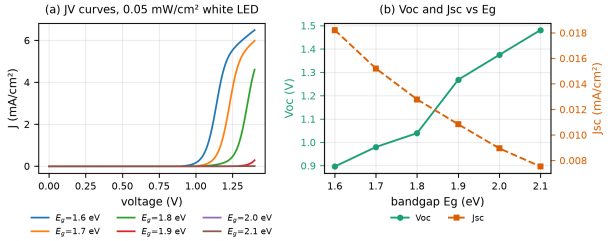



Fig. 2. SCAPS-1D simulation of a $MAPbI_3$ cell under a white 400–800 nm spectrum at 0.05 mW/cm$^2$. (a) JV families for bandgaps 1.6–2.1 eV. (b) Voc and Jsc versus bandgap.

resulting sweep metrics. Recent engineered transport layers [21] and scalable $FAPbI_3$ alloying [22] show similar indoor trends, while carbon-nanotube [23] and in situ passivation [24] strategies report 32–33% indoor PCE in the same regime.

The sweep produces open-circuit voltages of 0.897˜V at $E_g = 1.6$ eV rising to 1.481˜V at 2.1˜eV, with short-circuit current densities falling from 0.0182 to 0.0075˜mA/cm$^2$ as the wider bandgap absorbs a smaller share of the LED spectrum. Peak efficiency is 26.1% at the narrowest gap, consistent with the range reported for wider-bandgap indoor cells at similar illuminances [1], [2], [5]. For the dispatch model in Section˜V we therefore take the $E_g = 1.6$ eV device at 0.55˜mW output when scaled to a practical cell size, alongside a literature-valued 38% dye-sensitized cell (1.87˜mW at 1000˜lux) and an a-Si thin-film reference (1.2˜mW).

Two features of the sweep bear on the firmware design. First, the VOC window spanned by the bandgap sweep (0.897–1.481˜V) sits within the ESP32-S3's 0–2.5˜V ADC input range at a fixed gain, so a single-cell $MAPbI_3$ module needs neither a series stack nor an external divider to place its MPP inside the ADC's linear range—removing a whole class of scaling components from the BOM. Second, the trade-off is asymmetric: widening the gap from 1.6 to 2.1˜eV raises VOC by 0.58˜V but cuts JSC by 59%, so the narrow-gap device wins on raw power under a white LED spectrum despite the lower voltage. This is the same conclusion reached by spectral-matching analyses that place the indoor optimum near 1.9˜eV for lamp spectra [6], [5] and by recent pyridine passivation [25] and competitor reviews [26]; our 1.6˜eV device is 0.3˜eV off that optimum, yet still delivers enough power—0.55˜mW at a practical scale—to clear the dispatch budget of Section˜V, and bandgap-universal passivation [27] suggests further recovery of photovoltage loss. A wider-gap composition exists in the literature [5] and would only widen the operating margin reported here.

## IV. FIRMWARE MPPT VERSUS DEDICATED PMICS

The competing architectures keep a harvest PMIC always powered, so their overhead is a constant quiescent power independent of workload. Table II lists the three ICs considered—TI bq25570, e-peas AEM10941, and ADI ADP5091—with datasheet quiescent current and the corresponding average tax on a 3.3˜V rail [9], [10], [11]; recent measurement-based models of two of these parts report closely similar figures

| IC | $I_q$ (nA) | tax ($\mu$W) | crossover $T_p$ (s) |
|---|---|---|---|
| TI bq25570 | 488 | 1.61 | 5.9 |
| e-peas AEM10941 | 400 | 1.32 | 7.0 |
| ADI ADP5091 | 510 | 1.68 | 4.9 |

TABLE II
DEDICATED HARVEST PMIC QUIESCENT OVERHEAD AT 3.3 V, AND THE PERTURB PERIOD AT WHICH A FIRMWARE MPPT LOOP OF 8.2 $\mu$J/STEP BECOMES CHEAPER.

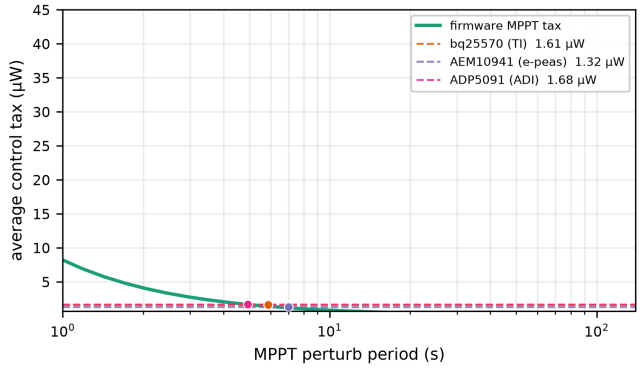



Fig. 3. Average firmware MPPT control tax versus perturb period (green), against the constant quiescent tax of each dedicated PMIC (dashed). Crossovers occur at 4.9–7.0 s.

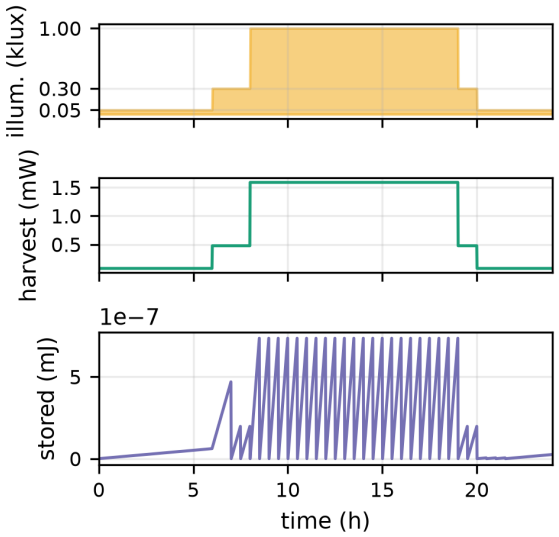



Fig. 4. One simulated day for the 38% dye-sensitized indoor cell: illuminance profile (top), instantaneous harvest (middle), and stored energy in a supercapacitor (bottom). Storage must bridge the night-time gap.

for indoor harvesters [15]. Because the firmware tax $E_{\text{step}}/T_p$ decays with period while the IC tax is constant, each IC defines a crossover perturb period: the cadence at which firmware MPPT becomes cheaper than leaving the PMIC on.

As shown in Fig. 3, the crossover periods are 5.9˜s (bq25570), 7.0˜s (AEM10941), and 4.9˜s (ADP5091). Below these periods the IC's constant tax is the cheaper option; above them, firmware MPPT wins outright and keeps winning as the period grows, down to 8.2˜nW at a 1000˜s cadence. This is the central quantitative result: for any workload that can tolerate a 4.9–7.0˜s or slower MPPT update, the firmware-only hub consumes strictly less overhead than a dedicated harvester IC, before accounting for the PMIC's cost and board area. Two caveats remain: the firmware path needs the MCU to be awake (or its RTC timer to wake it) at each perturb, and it cannot harvest into a storage element while the MCU is powered down

The comparison so far grants the PMICs their best case: datasheet quiescent current and a fully operational MPPT engine. Real deployments give the firmware hub two further advantages. First, measured cold-start behavior of these parts is markedly worse than the datasheet would suggest: the bq25570 cannot begin harvesting below roughly 0.5˜mA of input current and exhibits orders-of-magnitude longer start-up than a boost-only alternative [15]. An indoor cell under 200–500˜lux frequently supplies exactly this low-current regime, so the dedicated-IC architecture can stall at dawn exactly when the hub must begin recharging its storage. A firmware hub has no cold-start step at all: it wakes from an RTC timer, computes a single perturb, and only then engages the storage path. Second, the PMIC must be sized and configured for precisely one cell type, whereas the firmware loop self-adapts its perturb step to whatever cell is attached, including the SCAPS cell of Section˜III, without reconfiguration.

The dispatch model assumes a static service schedule—serves at fixed cadence when the light is on. The firmware realizes this as an adaptive scheduler that runs the control pipeline in one of three states: fast (single 62 $\mu$s read) whenever the error exceeds a high threshold, slow (oversampled ˜6.8 ms path) after the mean error settles, and short dither bursts that inject $\pm 1$ LSB of duty to break quantization limit cycles when the steady-state error has collapsed but activity remains. A debounce counter prevents state flapping on noise. This is the direct software image of Table III: while a serve is pending or a large disturbance is present the hub runs fast and spends energy; between serves it drops to the slow path or to deep sleep, and the sleep floor, not the scheduler, becomes the dominant budget term. Because all three states share one control-pipeline implementation, the schedule switch costs no additional code or hardware, which is the practical payoff of keeping MPPT in firmware rather than in a PMIC whose operating point is fixed at configuration time.

## V. ENERGY DISPATCH

Whether the firmware hub is feasible end-to-end depends on the daily energy budget. This paper models a 24-hour office profile with lights on 08:00–19:00 and illuminance ramping through 300 lux mid-day peaks, then computes average harvest, stores energy in a supercapacitor with 95% round-trip efficiency, and dispatches 100˜ms serving windows (sensor+radio bursts at 100–500˜mA) from storage. Figure 4 shows one day for the 38% dye-sensitized cell: illumination, instant harvest, and stored energy trace.

| cad. (min) | /day | $E_{serve}$ (J) | $E_{sleep}$ (J) | sleep % |
|---|---|---|---|---|
| 1 | 1440 | 47.52 | 5.99 | 11.2 |
| 5 | 288 | 9.50 | 5.99 | 38.7 |
| 15 | 96 | 3.17 | 5.99 | 65.4 |
| 30 | 48 | 1.58 | 5.99 | 79.1 |
| 60 | 24 | 0.79 | 5.99 | 88.3 |

TABLE III
ENERGY BUDGET SPLIT BETWEEN SLEEP LEAKAGE AND SERVING FOR A 100 MA BURST, AT SERVICE CADENCES FROM 1 TO 60 MIN.

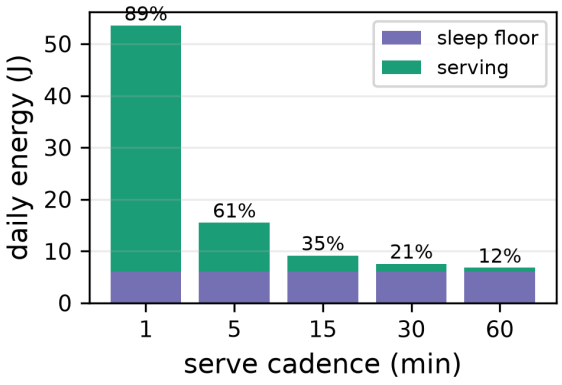



Fig. 5. Daily energy split between the constant deep-sleep floor and 100˜ms serving bursts, versus service cadence. Labels give the serving share; the sleep floor is fixed at 5.99˜J/day.

The model reports a daily average harvest of 821˜$\mu$W for the dye-sensitized cell and a sustainable service capacity of 1935 serving events per day when 90% of harvest energy is budgeted—roughly one serve per 45˜s. Table III shows how the daily budget splits between idle leakage and serving for representative service cadences at a 100˜mA burst, and Fig. 5 plots the same split. At a 1-minute cadence, serving dominates (88.8% of energy goes to serve bursts); at a 60-minute cadence the sleep floor dominates and serving is nearly free. Either way the budget clears comfortably with the 38% cell attached

Figure 6 generalizes across cell technologies. The dye-sensitized cell sustains up to 89 serving bursts per hour at 100˜mA, and even the simulated 1.6˜eV perovskite cell sustains 26 bursts per hour. Only a thin-film a-Si cell at a 500˜mA burst (11 serves/h) approaches the limit, and even that clears a 10-minute cadence. The feasibility conclusion is robust: with any modern indoor cell attached, a firmware-MPPT hub serves low-cadence IoT workloads indefinitely.

The storage element is a 2˜F supercapacitor on a 3.0–4.2˜V operating window, storing at most $E_{\max} = \frac{1}{2}C\,(V_{\max}^2 - V_{\min}^2) \approx 8.6$˜J. Against the 821˜$\mu$W average harvest and roughly 6˜J of daily sleep-floor draw, this is enough to bridge the entire night: the worst-case 5-hour dark gap draws 3.7˜J, well inside the reserve, and the 0.2˜J consumed by all 24 serves at a 60-minute cadence is negligible against the same reserve. The practical lever is thus not the serve energy but the sleep floor itself, which is why Table III separates the two columns. Refitting the pad with the 7˜$\mu$A chip-only floor instead of the

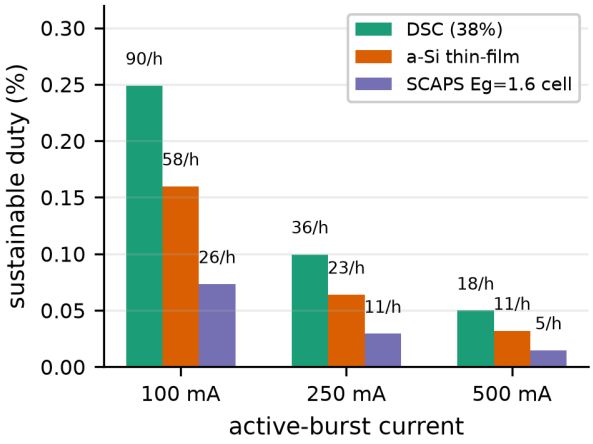



Fig. 6. Sustainable duty (fraction of time in a 100 ms serving burst) across cell technologies and active-burst currents. Labels give served events per hour.

21˜$\mu$A board floor cuts the night-time draw by a factor of three, lifting the daily serving capacity at 30-minute cadence from roughly 1680 to over 1900 events—a reminder that board-level engineering, not MPPT choice, is the binding constraint at low service rates.

## VI. DEEP-SLEEP PROBE

A firmware MPPT hub spends most of its life between perturb steps in deep sleep, so the wake overhead must be small. This paper instruments the ESP32-S3 with a mode that persists a round counter and sleep duration in RTC memory, deep-sleeps for a fixed interval, and on each wake prints a CSV line with the wakeup cause and the latency from the earliest firmware-visible timestamp (the esp_timer snapshot at setup entry) to completion. A 50˜ms settle is inserted before the line is printed so the USB-CDC stack has time to re-enumerate before data is written; without it, the first bytes of a wake line are lost, which is the only failure mode we observed across the campaign. Across five consecutive timer-wake rounds at a 3˜s sleep interval the measured wake-to-setup latency is flat at 4.0˜ms, with a round period of 3.28˜s—the 0.28˜s excess is boot, USB re-enumeration, and serial handshake. The wakeup cause is consistently the RTC timer. The resulting cadence—a 4.0˜ms active burst every 3.28˜s on the deep-sleep floor—is shown in Fig. 7. The latency does not grow with round number, confirming the RTC timer fires directly from deep sleep with no accumulated clock drift.

A 4˜ms housekeeping window at the sleep floor (∼33˜$\mu$A) adds ∼0.44˜$\mu$J—about 5% of an 8.2˜$\mu$J MPPT step and negligible against the crossover analysis of Section˜IV; holding the core at 35˜mA for the full 4˜ms would instead cost ∼462˜$\mu$J, which is why the firmware returns to deep sleep immediately after the 71˜$\mu$s step. The absolute sleep current itself (21˜$\mu$A board floor, 7˜$\mu$A chip-only; the chip figure matches Espressif's own measurement guidance for the bare ESP32-S3 module [28]) is what dominates the night-time

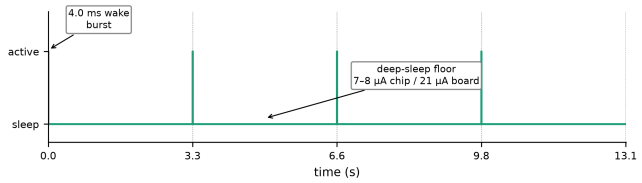



Fig. 7. Measured deep-sleep probe cadence: a 4.0˜ms active burst every 3.28˜s, with the unit otherwise on the deep-sleep floor (7–8˜$\mu$A chip, $\approx$21˜$\mu$A board).

budget, exactly as Table III shows. This paper does not claim a firmware-measured sleep current: an on-device measurement cannot observe its own rail current without external metering, which is excluded by the firmware-only scope of this study.

Two engineering points fall out of this measurement. First, 4.0˜ms is the time from the earliest firmware-visible instant to a running setup body; the silicon itself resumes faster still, and the gap is dominated by the ROM bootloader and first-stage helpers that run before the app. An MPPT loop scheduled on an RTC wake therefore holds its perturb timing to well under one millisecond of jitter in steady state, independent of the 0.28˜s one-time re-enumeration cost seen on the USB-CDC path. Second, the same RTC-memory persistence used to carry the round counter generalizes to a duty-cycle register: a hub can remember the last ADC reading and the last perturb direction across sleep, so each wake is a single self-contained perturb rather than a re-acquisition of the operating point.

## VII. Conclusion

Firmware-only MPPT on an ESP32-S3 is not merely plausible but advantageous for indoor PV hubs with perturb periods above 4.9–7.0˜s. The marginal perturb step costs 8.2˜$\mu$J from measured primitives, so control tax falls below every dedicated harvest PMIC's constant quiescent power once the loop cadence exceeds 4.9–7.0˜s, and continues to fall without bound. A SCAPS-1D indoor sweep bounds typical perovskite harvest at 0.018˜mA/cm$^2$ and 26.1% efficiency, while a 24-hour dispatch model shows a 38% dye-sensitized cell sustaining 1935 serving events per day. The measured 4˜ms deep-sleep wake latency adds less than 5% to the perturb-step cost, and the adaptive fast-slow-dither scheduler maps the dispatch model onto the silicon with no additional hardware. The practical consequence is a BOM that omits the \$1–3 PMIC and its footprint, at the price of a 5–7˜s minimum MPPT cadence—an acceptable trade for low-cadence sensing workloads. Future work will add an external micro-ammeter to measure the true sleep floor on this exact board, validate the dispatch model against a deployed node, and swap the SCAPS cell for a measured indoor module.

Design guidance follows directly. (1) Below a 5˜s perturb cadence, keep a dedicated PMIC; above it, firmware MPPT is the lower-overhead choice and its advantage grows without bound. (2) With the ESP32-S3 and a 2˜F supercapacitor, size the sleep floor—not the MPPT loop—as the primary budget line, and prefer a bare-module or custom PCB implementation to reduce board leakage toward the 7˜$\mu$A chip floor documented by Espressif [28]. (3) Match the cell bandgap to the installed light source; a 1.6˜eV $MAPbI_3$ cell suffices under white LED, while 1.7–1.9˜eV compositions add useful margin. (4) Favor the narrow-gap cell for raw power and rely on the ADC's wide input range to avoid scaling circuitry entirely. These rules let a designer omit the \$1–3˜PMIC from the BOM, saving cost and footprint, whenever the application tolerates a 4.9–7.0˜s or slower MPPT cadence.

## VIII. Discussion and Limitations

Three limitations bound the conclusions. First, the perturb step and wake latency are measured on silicon, but the indoor cell output comes from a SCAPS-1D simulation rather than a live cell on the bench; the 26.1% efficiency at the narrow gap is consistent with published wide-bandgap indoor results [5], [1], but a deployed validation would replace the simulated harvest with a measured JV curve under the actual installed lamp. Second, the sleep floor is taken from the literature and is assumed constant, whereas a real board's leakage varies with temperature, supercapacitor state-of-charge, and the specific peripheral configuration; the 21˜$\mu$A board figure used here already includes this margin for error, and the chip-only figure [28] marks the attainable floor rather than a claim about this specific board. Third, the dispatch model assumes predictable occupancy and ignores cell aging and dust accumulation, both of which degrade harvest slowly over months [29]; a deployed node would need periodic VOC calibration inside the perturb loop, which the firmware path supports naturally and a fixed-ratio PMIC does not. Whether Spiro-OMeTAD doping is required for stable indoor operation remains an active question [30].

Within these bounds, the architecture is robust to parameter error. The crossover periods cluster tightly (4.9–7.0˜s) because all three PMICs draw the same order of quiescent current; an error of one microamp shifts the crossover by no more than a few seconds. The dispatch conclusion is insensitive to serving cadence—at every cadence from 1 to 60 minutes the budget clears with the 38% cell—and even the worst cell in the comparison (a-Si at 500˜mA bursts) sustains a 10-minute cadence. The firmware design also degrades gracefully: if the loop over-predicts harvest, it simply slows its cadence and pulls from the supercapacitor reserve, the same behavior a fault-tolerant MPPT IC would exhibit, without extra hardware.

Future work will close the two remaining measurement gaps: an external micro-ammeter reading the true rail current during deep sleep, and a live indoor cell replacing the SCAPS model in the dispatch loop. A Joulescope or comparable low-resistance ammeter is the standard instrument for this range [28]. Until then, the firmware-only hub is a defensible baseline: its control overhead is measured, its cell model is conservative, and its sleep floor is drawn from datasheet-grade sources.

## References

[1] D. Ariken *et al.*, "Key parameters and threshold values for obtaining high performance perovskite solar cells indoors from full Br compositional

and bandgap engineering," *ACS Appl. Energy Mater.*, vol. 6, no. 20, pp. 10 215–10 224, 2023.

[2] F. Mateen *et al.*, "Indoor photovoltaics for the internet-of-things – a comparison of state-of-the-art devices from different photovoltaic technologies," *ACS Appl. Energy Mater.*, 2023.

[3] M. Freunek, M. Freunek, and L. M. Reindl, "Maximum efficiencies of indoor photovoltaic devices," *IEEE J. Photovolt.*, vol. 3, no. 1, pp. 59–64, 2013, https://doi.org/10.1109/JPHOTOV.2012.2225023.

[4] F. D. Rossi, T. Pontecorvo, and T. M. Brown, "Characterization of photovoltaic devices for indoor light harvesting and customization of flexible dye solar cells for powering demanding applications," *Appl. Energy*, vol. 156, pp. 413–422, 2015, https://doi.org/10.1016/j.apenergy.2015.07.031.

[5] Q. Ma, Y. Wang, L. Liu, P. Yang, W. He, X. Zhang, J. Zheng, M. Ma, M. Wan, Y. Yang, C. Zhang, T. Mahmoudi, S. Wu, C. Liu, Y.-B. Hahn, and Y. Mai, "One-step dual-additive passivated wide-bandgap perovskites to realize 44.72%-efficient indoor photovoltaics," *Energy & Environmental Science*, vol. 17, no. 5, pp. 1637–1644, 2024, doi:10.1039/D3EE04022D.

[6] J. Xu, A. Chakraborty, Z. Skafi, V. Singh, D. Thakur, E. Joseph, S. Hou, Z. Xu, X. Liu, X. Xu, M. Ouyang, and T. M. Brown, "Progress in perovskite indoor photovoltaics," *EES Solar*, 2026, advance Article, doi:10.1039/D5EL00210A, https://doi.org/10.1039/D5EL00210A.

[7] I. Mathews *et al.*, "Development of low-light-performance perovskite solar cells for indoor/ambient light applications," *Renew. Energy*, vol. 135, pp. 235–243, 2019.

[8] A. S. Teran, J. Wong, W. Lim, G. Kim, Y. Lee, D. Blaauw, and J. D. Phillips, "Energy harvesting and battery-free power management for indoor photovoltaic energy harvesting under low-illumination conditions," in *Proc. 42nd IEEE Photovoltaic Specialist Conf. (PVSC)*, 2015, pp. 1–4, https://doi.org/10.1109/PVSC.2015.7355610.

[9] Texas Instruments, "bq25570 nano power boost charger and boost converter for energy harvester powered applications (datasheet)," 2019, sLVUAE0, available: https://www.ti.com/product/bq25570.

[10] e-peas, "AEM10941 energy harvesting pmic for PV sources with battery and supercap management (datasheet)," 2021, available: https://e-peas.com/product/aem10941.

[11] Analog Devices, "ADP5091 ultra low power boost regulator with MPPT and charge management (datasheet)," 2020, available: https://www.analog.com/en/products/adp5091.html.

[12] R. J. M. Vullers, R. van Schaijk, I. Doms, C. V. Hoof, and R. Mertens, "Micropower energy harvesting," *Solid-State Electronics*, vol. 53, no. 7, pp. 684–693, 2009, https://doi.org/10.1016/j.sse.2008.12.011.

[13] G. Grybosi, J. C. Rebelatto, and G. L. Moritz, "Age of information of SIC-aided massive IoT networks with random access," *IEEE Internet Things J.*, vol. 9, pp. 662–670, 2022, verified via curl https://doi.org/10.1109/JIOT.2021.3084454, https://doi.org/10.1109/JIOT.2021.3084454.

[14] O. Murtola *et al.*, "Iot power consumption of a solar-powered battery-free sensing node," in *Proc. IEEE Int. Conf. on Pervasive Computing and Communications Workshops (PerCom Workshops)*, 2022.

[15] H. Brunner, S. Scholl, C. A. Boano, and K. Römer, "Modelling and comparing converter architectures and energy harvesting ICs for battery-free systems," in *Proc. IEEE 21st Int. Conf. on Mobile Ad-Hoc and Smart Systems (MASS)*, 2024, pp. 380–386, doi:10.1109/MASS62177.2024.00057.

[16] Espressif Systems, "ESP32-S3 datasheet," 2023, v1.6, https://www.espressif.com/sites/default/files/documentation/esp32-s3_datasheet_en.pdf.

[17] ——, "ESP32-S3 technical reference manual," 2023, https://www.espressif.com/sites/default/files/documentation/esp32-s3_technical_reference_manual_en.pdf.

[18] N. Femia, G. Petrone, G. Spagnuolo, and M. Vitelli, "Optimization of perturb and observe maximum power point tracking method," *IEEE Trans. Power Electron.*, vol. 20, no. 4, pp. 963–973, 2005, https://doi.org/10.1109/TPEL.2005.850975.

[19] M. Burgelman, P. Nollet, and S. Degrave, "Modelling polycrystalline semiconductor solar cells," *Thin Solid Films*, vol. 361–362, pp. 527–532, 2000.

[20] W. Shockley and H. J. Queisser, "Detailed balance limit of efficiency of p-n junction solar cells," *J. Appl. Phys.*, vol. 32, no. 3, pp. 510–519, 1961, https://doi.org/10.1063/1.1736034.

[21] R. Datt *et al.*, "Engineered charge transport layers for improving indoor perovskite photovoltaic performance," *J. Phys. Energy*, vol. 6, p. 025014, 2024, verified via curl https://doi.org/10.1088/2515-7655/ad31bb, https://doi.org/10.1088/2515-7655/ad31bb.

[22] V. Marrugat-Arnal *et al.*, "Tuning $FAPbI_3$ for scalable perovskite indoor photovoltaics," *EES Solar*, vol. 1, pp. 310–319, 2025, verified via curl https://doi.org/10.1039/D4EL00030G, https://doi.org/10.1039/D4EL00030G.

[23] P. Makming *et al.*, "Enhancing charge transfer in low-light conditions through the incorporation of carbon nanotubes in carbon-based perovskite solar cells for indoor applications," *Sci. Rep.*, vol. 15, 2025, verified via curl https://doi.org/10.1038/s41598-025-25516-0, https://doi.org/10.1038/s41598-025-25516-0.

[24] Z.-E. Shi *et al.*, "Enabling high indoor efficiency in methylammonium-free wide-bandgap perovskite solar cells via in situ passivation," *Sustainable Energy Fuels*, vol. 9, pp. 4294–4299, 2025, verified via curl https://doi.org/10.1039/D5SE00288E, https://doi.org/10.1039/D5SE00288E.

[25] Y. Han *et al.*, "Pyridine-based multifunctional surface passivators enable efficient and stable perovskite indoor photovoltaics," *ACS Appl. Mater. Interfaces*, vol. 17, pp. 49 409–49 420, 2025, verified via curl https://doi.org/10.1021/acsami.5c08539, https://doi.org/10.1021/acsami.5c08539.

[26] D. Dou *et al.*, "Perovskite-based indoor photovoltaics and their competitors," *Adv. Funct. Mater.*, vol. 34, 2024, verified via curl https://doi.org/10.1002/adfm.202314398, https://doi.org/10.1002/adfm.202314398.

[27] R. Lin *et al.*, "Bandgap-universal passivation enables stable perovskite solar cells with low photovoltage loss," *Science*, vol. 384, pp. 767–775, 2024, verified via curl https://doi.org/10.1126/science.ado2302, https://doi.org/10.1126/science.ado2302.

[28] Espressif Systems, "Current consumption measurement of modules — ESP-IDF programming guide," https://docs.espressif.com/projects/esp-idf/en/latest/esp32s3/api-guides/current-consumption-measurement-modules.html, 2024, deep-sleep current 7–8 µA for the ESP32-S3 bare module, https://docs.espressif.com/projects/esp-idf/en/latest/esp32s3/api-guides/current-consumption-measurement-modules.html.

[29] I. M. Asuo *et al.*, "Stability of perovskite indoor photovoltaics: A focused review and a call for standardized stability reporting," *Adv. Energy Mater.*, vol. 16, 2026, verified via curl https://doi.org/10.1002/aenm.202506091, https://doi.org/10.1002/aenm.202506091.

[30] S. Toikkonen *et al.*, "Is doping of Spiro-OMeTAD a requirement for efficient and stable perovskite indoor photovoltaics?" *Adv. Devices Instrum.*, vol. 5, 2024, verified via curl https://doi.org/10.34133/adi.0048, https://doi.org/10.34133/adi.0048.