

MICROHUB[®]
Innovation Everyday



www.microhubtech.com



info@microhubtech.com



9904353830




K1/518/8, 1st Floor, Makarpura GIDC, Makarpura, Vadodara, Gujarat
390010

MH0430 – TECHNO TRENDZ

SRMS-base

- Project code : MH0430
- PO number : TTZINV/PO/009/2026-27
- Gerber/DFX file name : SRMS-base
- Type of fixture: Standard
- Fixture model : MH160210
- Prepared by : MM

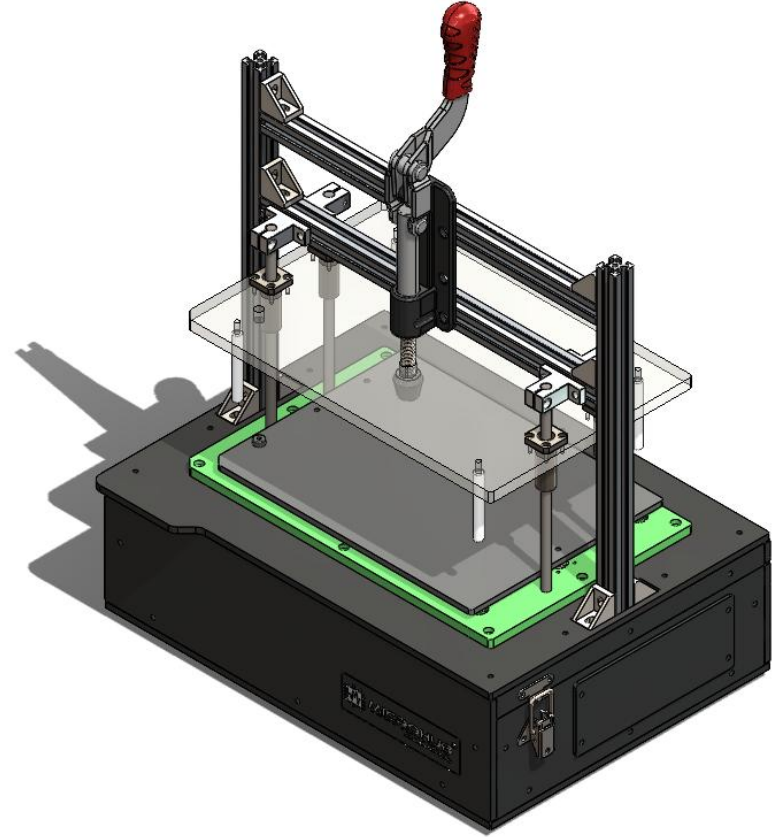

DOCUMENT DRAFT HISTORY

Sr. No.	Draft version	Date	Remark	Revised by
1	R00	14-07-2026	Initial draft	Mahek
2	R01	14-07-2026	Test points updated for J7, J8, J10, J11, toggle switch updated for each fan	Mahek
3	R02	23-07-2026	RS485, Keypad, DTH sensor location updated	Mahek
4	R03	28-07-2026	Updated location for Keypad and DHT sensor	Meet
5				
6				


PO/CRITICAL PURCHASE DETAILS

- Critical purchase required : Yes
- Critical purchase list :
 - Toggle switches - Qty10
 - Potentiometer(10k) - Qty5

FIXTURE REQUIREMENTS – QTY 01

- Number of UUT: 01
- Size of UUT in mm: 178mm x 158mm
- Total number of test point: 97
- Number of Top test point: 0
- Number of Bottom test point: 97
- Type of test points: Soldered legs
- Number of mounting holes: 06
- Peripheral connectors: NA
- Thickness of UUT: 1.6mm
- Step file of UUT: NA
- Toggle clamp size: 78mm (BIG)
- Bearing : Short Flange linear

DATA RECEIVED FROM CLIENT

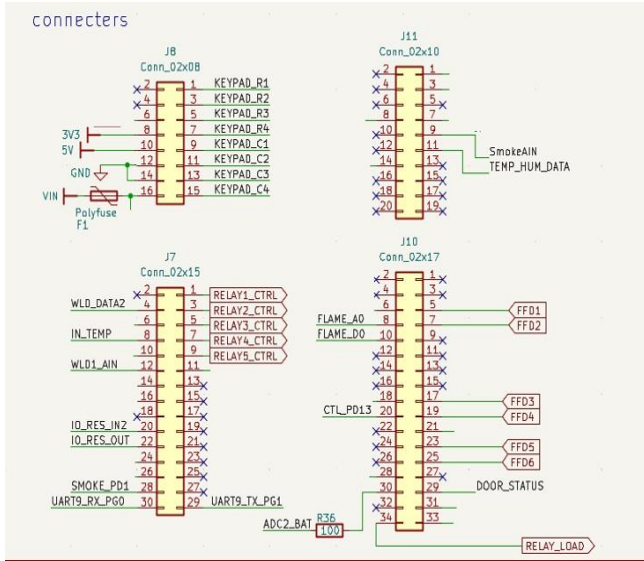


Below Pins have to be used from CPU:

3.3V power – J8,8

5.0 V Power – J8,10

GND – J8,12,14

12V – J8,16

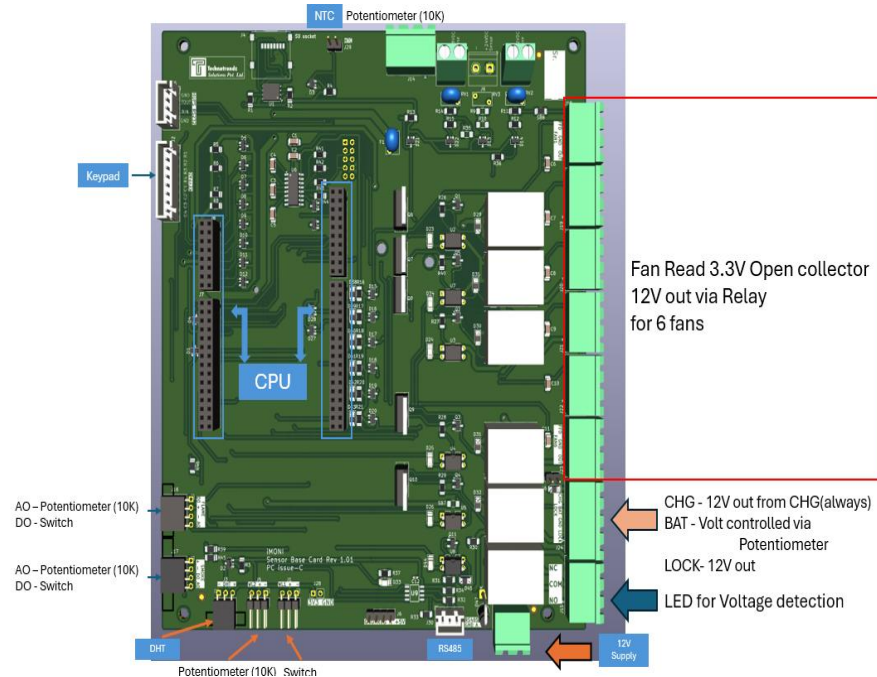


DATA RECEIVED FROM CLIENT

S.No.	CONNECTOR	Before Pins	After Pins	SENSOR	PIN	DEVICE (ZIG)
1	J1	1	3	Water Logging	• WL1 – Sensing High/Low	Switch
2	J2	8	8	Keypad	Keypad will be used	Keypad*
3	J3	1	3	DHT	DHT Sensor will be used	DTH Sensor*
4	J5	1	3	Water Leakage	• WL1 – Sensing High/Low	Potentiometer
5	J14	1	4	Door	• Sensing Open/Close	Switch
6	J15	1	3	Non-critical load	• Voltage Output	LED#
7	J16	2	2	Flame	• AO – 3.3/1.8/0 Volt • DO – Sensing High/Low	• Potentiometer • Switch
8	J17	2	2	Smoke	• AO – 3.3/1.8/0 Volt • DO – Sensing High/Low	• Potentiometer • Switch
9	J18-J23	12	18	Fan	• FFD – Sensing High/Low • OUT – 12V Output	Transistor (To LOW the signal at FFD) LED (To detect the Volt.)
12	J24	3	4	Lock Relay	• CHG – 12V Output • BAT – 12V Input • LOCK – 12V Output (EM Lock)	• LED • Potentiometer • LED
10	J26		0	No Use		
13	J29	1	2	NTC	Resistant Control 1,5,10 kΩ	Potentiometer (10k)
14	J30	2	3	RS485	Actual Device will be used	RS485*
15	J25	2+2	2	PSU*	12V supply will be used	12V, 3.3V, 5V & GNDS
16	J7,J8, J10, J11	36	40	CPU	CPU will be used for testing	CPU Board*

DATA RECEIVED FROM CLIENT


List of Analog Signal Range 0.0 to 3.3V using potentiometer

PIN	SIGNAL	
PA0	ADC1_INP0	ADC2_BAT
PF11	ADC1_INP2	WLD1_AIN
PB1	ADC1_INP5	INTEMP
PF12	ADC1_INP6	FlameAIN
PA3	ADC1_INP15	ADC1_48V
PA5	ADC1_INP19	SmokeAIN

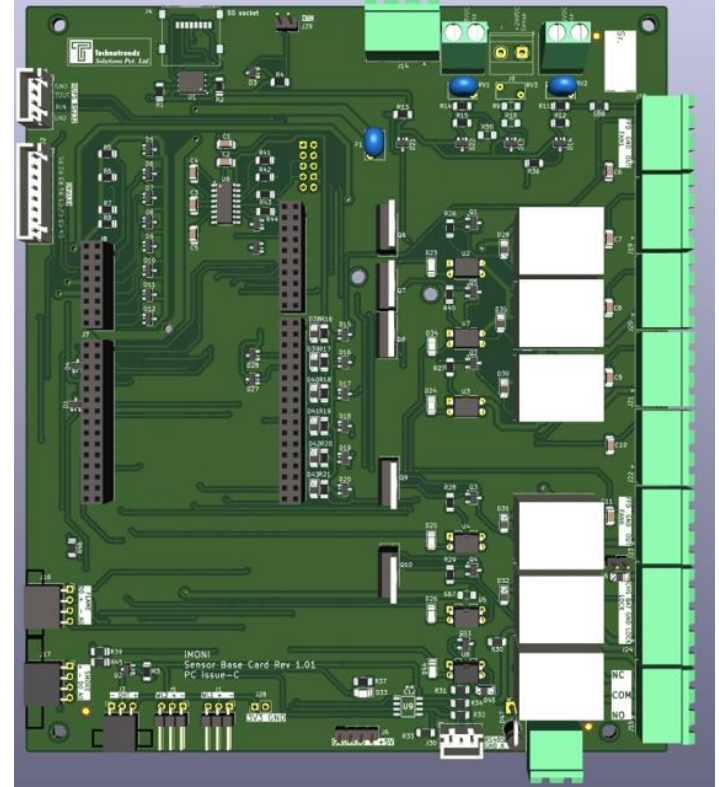


DATA RECEIVED FROM CLIENT

- KEYPAD

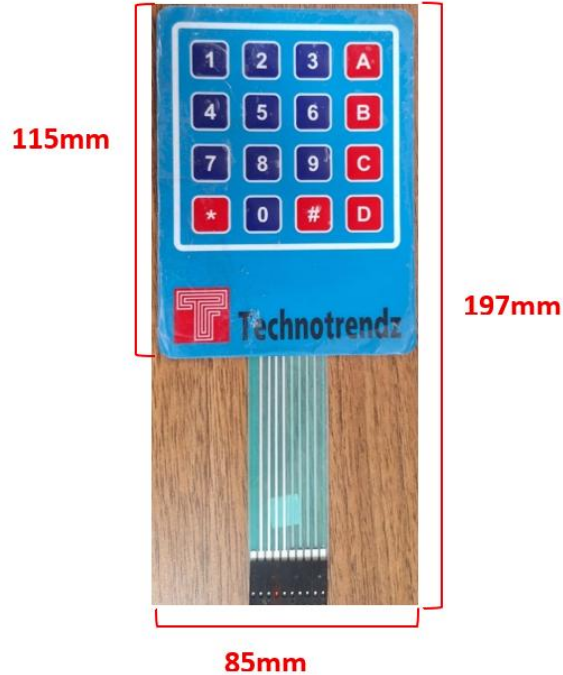

- DHT Sensor

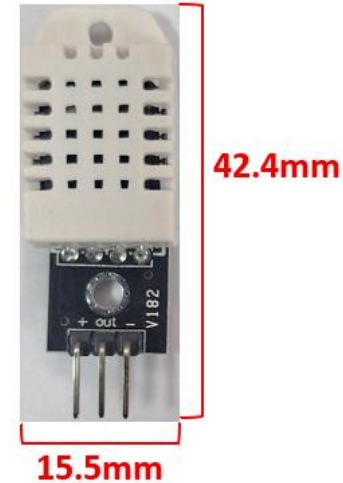


DATA RECEIVED FROM CLIENT

- CPU Board



74mm

137.2mm

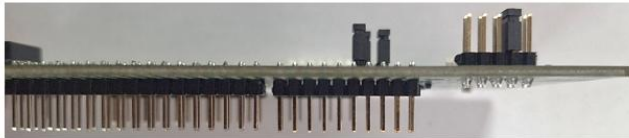

17.5mm

- RS485




18.5mm

66.6mm




12.5mm

DATA RECEIVED FROM CLIENT

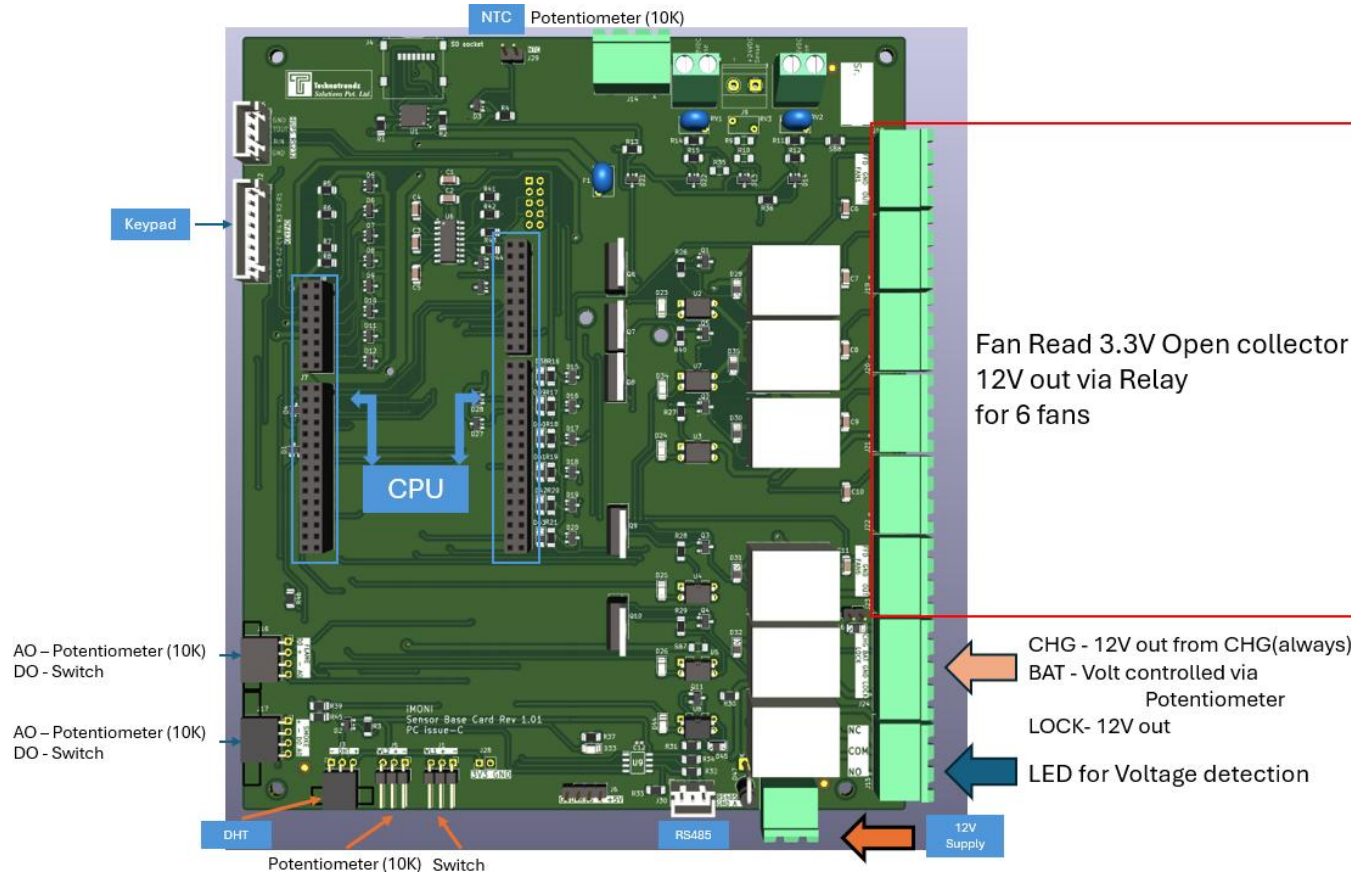

TEST POINTS/POGO PINS DETAILS

- Number of Pogo pins: 97
- Pogo pins make: Standard
- Type of pogo pins: Need to decide
- Current rating of pogo pins: <2A

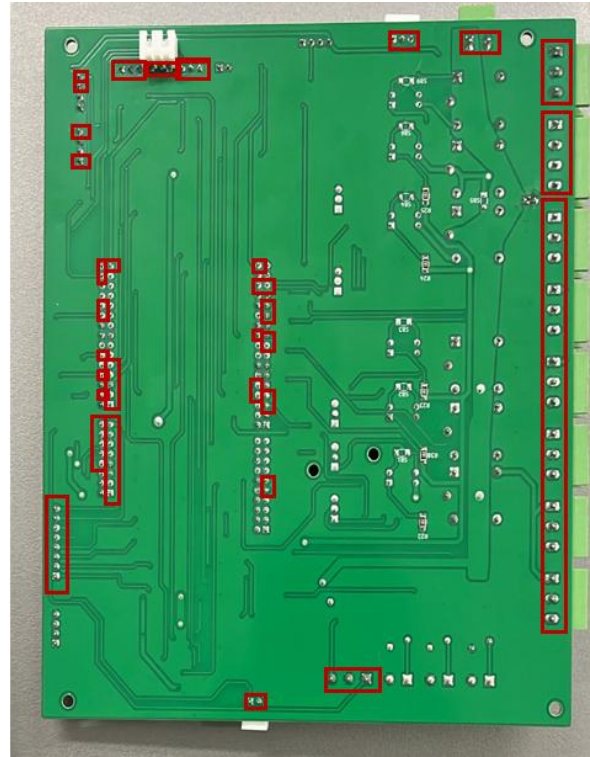

FRONT VIEW


 Potentiometer



 5mm LED with metal holder



 DHT Sensor

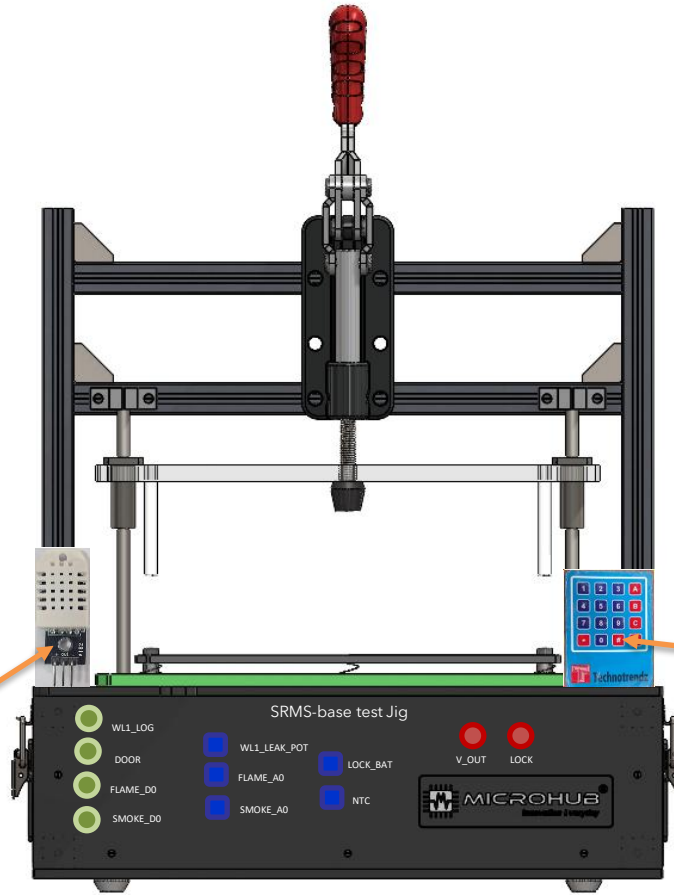

 Toggle switch





 KEYPAD will be at 45 angle

- Fixture name info: SRMS-base test Jig

TOP VIEW

- Orientation of UUT into bed of nail from top view.

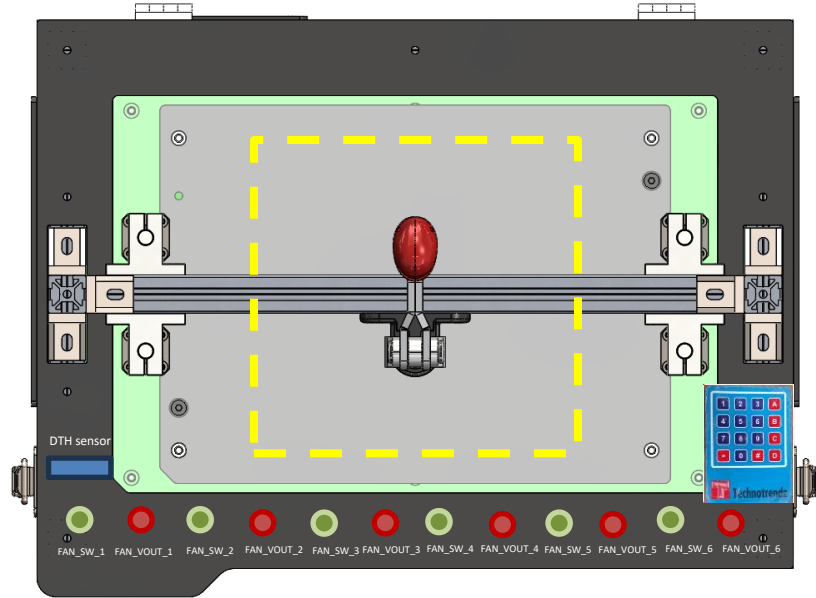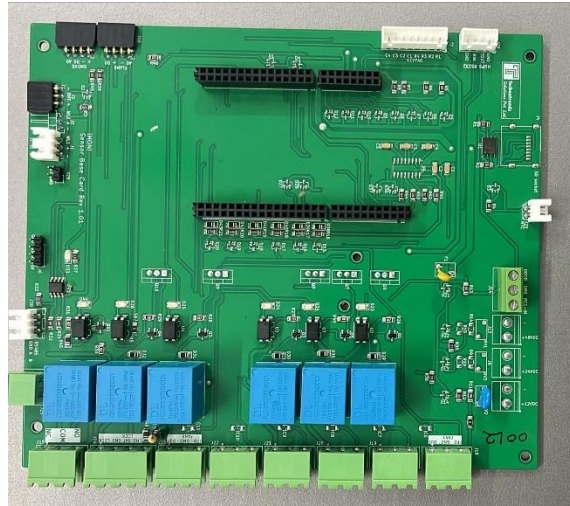

 Toggle switch




 5mm LED with metal holder




RIGHT SIDE


 USB A Panel mount

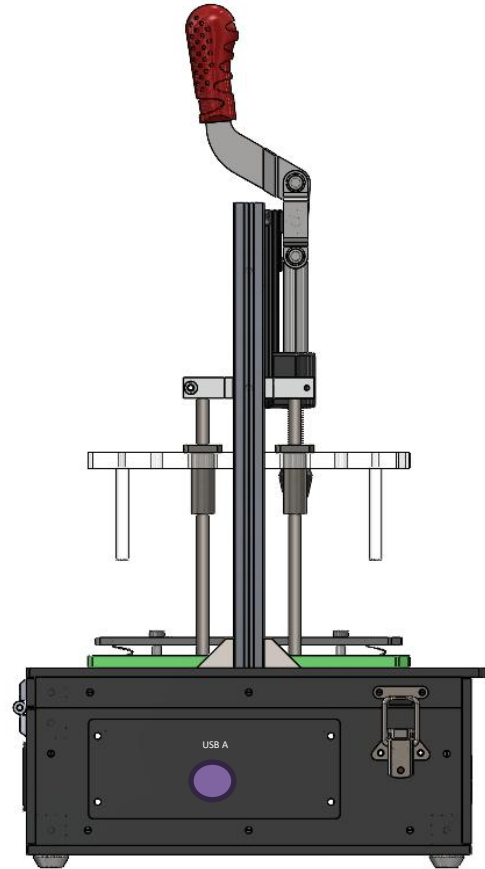

LEFT SIDE

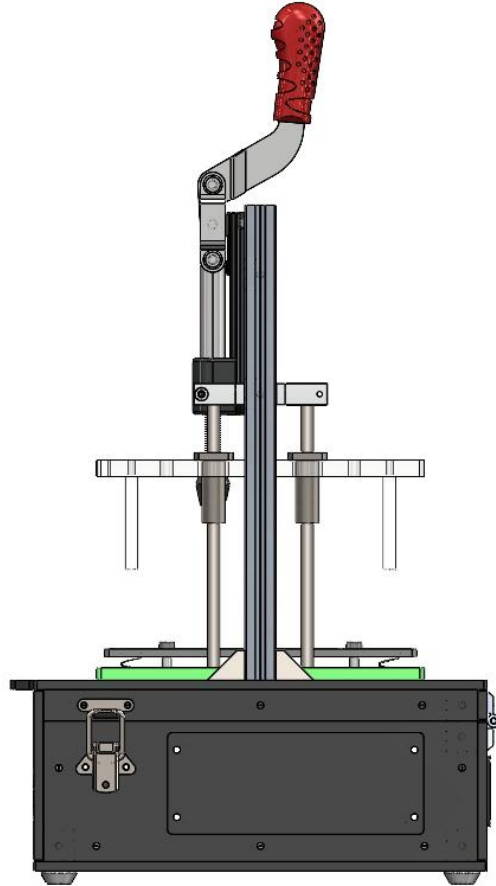

BACK SIDE

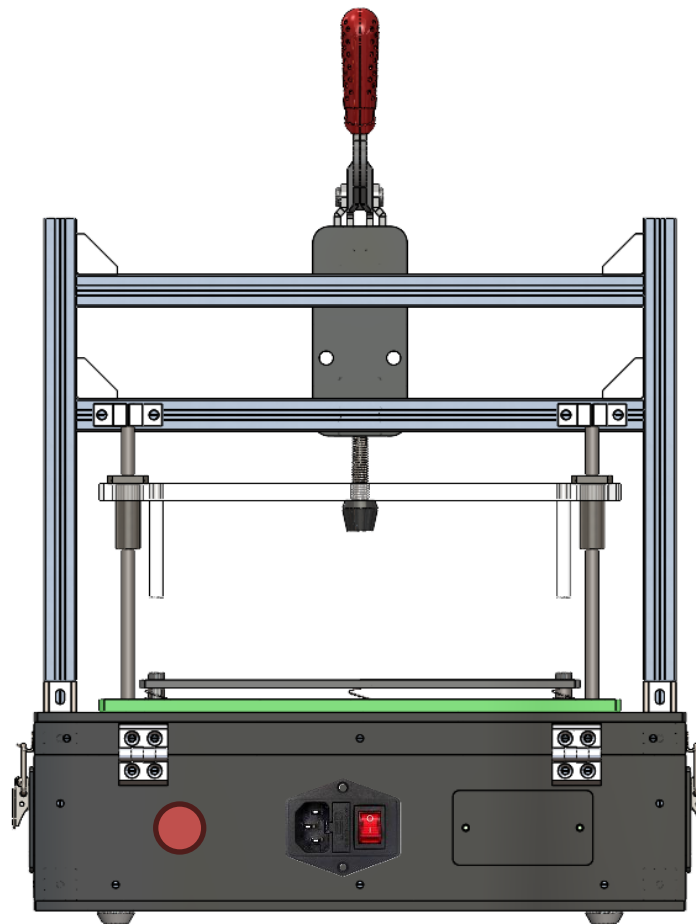

22.5mm cutout for external
cable or wire access

FIXTURE SIZE

- Electrical mounting area inside fixture: 330mm x 220mm x 60mm (L x W x H)
- Overall test fixture size: 430mm X 320mm X 430mm (L x W x H)

WIRING DETAILS

- Solder all pogo pins using 0.25sqmm Teflon wire with proper insulation sleeves. Keep the wire length between 300-400mm with other end will connect to respective sensor, connector, LED and switch.
- Detailed wiring schematic will share once design is complete.
- Use pogo pins with current rating more than 5A at J25.

NOTE

- CPU board and RS485 needs to mount inside fixture.
- Keypad will be on 45 angle on TOP of fixture.
- DHT sensor will be on TOP of fixture and it will half way out.
- Connect RS485 to panel mount USB on right side