



Figure 1: PrePre sensor prototype.

PrePre: Presence and Pressure Sensing

Troy Nachtigall

Eindhoven University of
Technology
Eindhoven, 5400MB, NL
t.r.nachtigall@tue.nl

A.M.J.M. Schoonen

Eindhoven, The Netherlands
admar@familieschoonen.nl

Abstract

Designing with properties such as touch and distance sensing in electronics and digital control enables new dimensions within fashion and design, and a range of new possibilities for sensing, tactility and functionality. Resistive pressure sensing and capacitive presence sensing are not new in wearable technology. However, there is still limited insight into the potential of soft materials capable of performing multiple functions at the same time. Adding multiple functionalities is fundamental to the exploitation of new e-textile properties. Development of multifunctional textiles may provide greater use possibilities for e-textiles where separate components for each sensor were required. This submission to the ISWC Fiber arts design competition demonstrates a method to add presence sensing to pressure sensors, allowing to detect the presence of humans before they touch the pressure sensor. This allows for novel interfaces that guide users even before they deliberately use and interact with the object. In principle, the method only requires a software modification so there are no additional costs for materials and the feature could be made available to existing products with a software update. This textile is a prime example the design research into wearable technology of Troy Nachtigall coming together with the particular capacitive engineering expertise of Admar Schoonen. Together they create a new smart textile with multi functionalities that sense presence and pressure.

Paste the appropriate copyright statement here. ACM now supports three different copyright statements:

- ACM copyright: ACM holds the copyright on the work. This is the historical approach.
- License: The author(s) retain copyright, but ACM receives an exclusive publication license.
- Open Access: The author(s) wish to pay for the work to be open access. The additional fee must be paid to ACM.

This text field is large enough to hold the appropriate release statement assuming it is single spaced in a sans-serif 7 point font.

Every submission will be assigned their own unique DOI string to be included here.

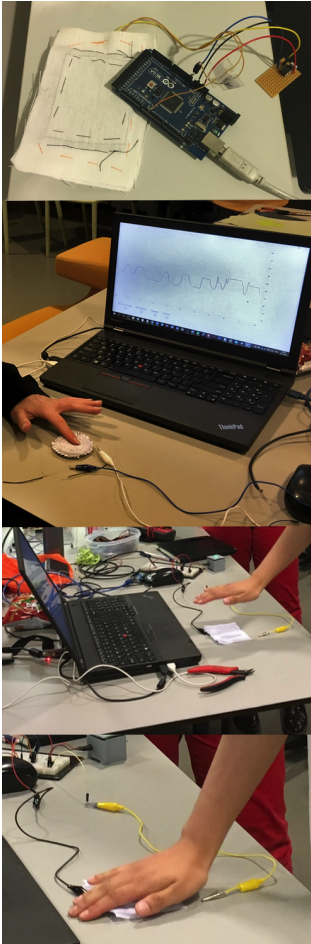


Figure 2: PrePre workshop testing materials and configurations at the TU/e E-Lab.

Author Keywords

Authors' choice; of terms; separated; by semicolons; include commas, within terms only; required.

ACM Classification Keywords

H.5.2.Information Interfaces and Presentation, I.4.8 Sensor Fusion [

Author Keywords

]; Sensor; Sensing; Presence; Pressure; Capacitive; Resistive; Textile; E-textile

Introduction

Troy Nachtigall is a Wearable Technology expert currently exploring programming materials as a Marie Sladowska Curie research fellow in the ArcInTexETN Horizon 2020 project where he explores the relationship of adaptive and responsive wearables between the scales of the individual, the room and architecture. Engineer Admar Schoonen is an expert in capacitive technologies with many projects in capacitive touch sensing. He is a member of the TU/Eindhoven Industrial Design /dSearch labs exploring design research from an engineering perspective. PrePre presents a design collaboration between Troy and Admar to create an e-textile and supporting code to sense pressure and presence on as many as four sensors simultaneously. This collaborative process was selected for a pair of workshops at the Ultra Personalized Smart Textiles (UPST) project at the University of Technology at Eindhoven in part as an ambassador action of the ArcInTexETN Horizon 2020 project (www.ArcInTexETN.eu). These workshops explored iterations of touch and presence technologies with interaction designers where new frontiers of sensing and actuating were explored.

Design

The capability of sensing not only when someone is pressing against a textile, but when they are approaching the textile adds new dimensions to interaction and the design of those interactions. While the sensor can be made with conductive, resistive and insulating materials, the sensor is intended for 'on the body' and 'near the body' uses where softness and tactility are highly valued and often product features.

Design Concept

Touch is important in interaction, but vicinity is often revealing of behavior and motivations. Not only can vicinity detect hesitation or reluctance in touching, but vicinity can also reveal choosing not to touch. This becomes very interesting when deployed in a garment worn on the body. In the process of iterative design development this 'on the body' aspect became increasingly interesting. The decision to add a shielding layer to the sensor allows for the use of the PrePre on the body which is difficult as the capacitive sensor typically sees both sides. After several workshops with designers of the Ultra Personalized Smart Textiles research group, Figure 2, not only were choices of textiles perfected, but the technique of capacitive sensing was tailored as well. At the same time the aesthetic qualities were considered as the PrePre is intended for fashion. The PrePre sample is novel in its dual nature of sensing pressure and presence at the same time. Since it requires no extra hardware or fabric layers, garments can be thinner, more flexible and breathable as well as lower cost and with lower impact on environment.

Textiles

A low density ESD Foam¹ was chosen for the resistive layer for its spacer fabric qualities. The low density aspect causes the foam to lift back up quickly after the touch is released which helps mitigate hysteresis. A highly conductive silver coated e-textile knit Dorlastan was chosen for the electrode layers due to its soft yet highly conductive feature. The stretch version was chosen to once again aid in resiliency which helps the sensor return to its original state when released. An hydrophobic polyester was chosen for the insulating layers to protect the conductive layers and prevent influence from humidity. A conductive ripstop nylon was selected for the shielding layer for its conductive conformity. An overview of the stackup of the different materials is shown in Figure 8.

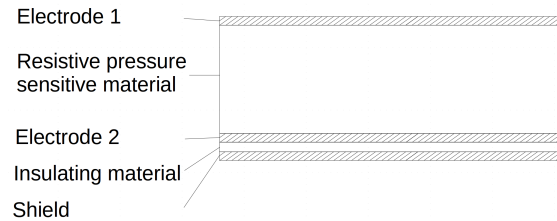


Figure 3: Stackup for pressure and presence sensor with shield

Relevancy

It can be imagined that the PrePre could be integrated into garments, accessories, furniture, automotive and other places of human computer interaction. The sensor is designed to the human body and the scale of the human hand. The soft and flexible nature of the e-textile sensor allows for its implementation on a multitude of surfaces that

¹<http://nl.farnell.com/multicomp/039-0050/low-density-foam-305x305x6mm/dp/1687866>

the hand typically interacts with. This includes clothing and accessories.

Technical Aspects

Resistive Pressure Sensors

Low cost pressure sensors are often made by sandwiching flexible electrodes with a layer of flexible moderately conductive material in between. The moderately conductive material is usually made of a carbon impregnated polymer with a specific structure that allows it to be squeezed together. The material can be considered as having many parallel resistors. When the material is compressed some of the resistors will be partially short-circuited due to non-linear elastic deformations. The partial short-circuits result in a lower overall resistance of the structure. This is visualized in Figure 3.

Capacitive Touch / Distance Sensors

Capacitive sensors are popular sensors in embedded computing due to their low cost and capabilities of detecting approaching human body parts, which allows the object to give feedback to the user even before the user is physically touching the object. The physics behind sensors that measure self-capacitance is that one plate of the capacitor is formed by the sensor and the other plate is formed by nearby grounded objects. The capacitance is a function of area and distance, as shown by the well-known parallel plate model

$$C = \frac{\epsilon A}{d} \quad (1)$$

where C is the capacitance, ϵ is the permittivity of the material between the plates (approximately $8.85418 \cdot 10^{-12}$ F/m for air), A is the overlapping area of the plates and d is the distance between the plates.




Figure 4: Conceptual pressure sensor. Compression of the sensor causes partial short-circuits which lowers the overall resistance of the structure.

For many use cases of capacitive touch, the permittivity and area do not change significantly and thus the capacitance is a measure for the distance between the sensor and the body part.

There are many different methods to measure self-capacitance, two of those will be briefly discussed here.

R-C Charge Method

A very popular method in the Do It Yourself (DIY) community is the R-C charge method. In this method the charge and discharge times of a resistor-capacitor combination is measured. Since the resistor is fixed value, this is a measure for the value of the capacitor. A detailed description can be found in [FIXME: ADD REFERENCE](#)

An intrinsic feature of capacitive touch sensors is that the electric field needs to fringe out of the object to be able to sense the human body and due to this fringing, the electric field is also easily disturbed by other electric fields or nearby grounded objects such as 110 / 230 V wires or devices or metal structures. The slow measurement method of the R-C charge method makes it more difficult to filter out these disturbances, leading to poor performance of the sensor and poor experiences of capacitive touch for users of the objects which use this method.

CVD Method

Another well-known method for self-capacitance does not rely on R-C charge times but instead relies on charge distribution between the sample and hold capacitor of an ADC ($C_{S\&H}$) and the capacitive sensor. This method is called Capacitive Voltage Division (CVD).

In this method, no external resistor is required and the sensor plate is directly connected to an analog input pin. The microcontroller starts a measurement by configuring this pin

as a digital output and making this output low, thereby discharging the sensor. Next, the microcontroller connects the internal ADC to its supply voltage, which charges $C_{S\&H}$ to a fixed amount of charge which depends only on the capacitance $C_{S\&H}$ and the supply voltage.

After the sensor pin is discharged and $C_{S\&H}$ is charged, the sensor pin needs to be reconfigured as analog input and the multiplexer of the ADC needs to be switched to this input. This will redistribute the charge on $C_{S\&H}$ over both $C_{S\&H}$ and the capacitance of the sensor. A larger sensor capacitance will result in a lower voltage on the sensor and the last step of this method is to measure this voltage using the usual ADC functions.

Since this method does not rely on R-C discharge times but uses the internal and usually much faster ADC, more filtering can be applied to the signal to remove disturbance of other nearby objects and electronic devices. This results in a superior performance and a better user experience.

Using Resistive Pressure Sensors as Capacitive Distance Sensors

The CVD method connects the sensor directly to the analog input of a microcontroller, similar to the resistive sensor setup. The resistive sensor can now be used to also measure capacitance by connecting the other electrode of the sensor to a GPIO pin instead of ground. This setup is shown in Figures 4 and 5.

Figure 4 shows the setup in resistive sensing mode, which is a standard resistive divider setup using an internal pull resistor as reference resistor and a digital output pin as ground to complete the circuit.

Figure 5 shows the same circuit but with the GPIO pins reconfigured for capacitive sensing. In this setup, the inter-

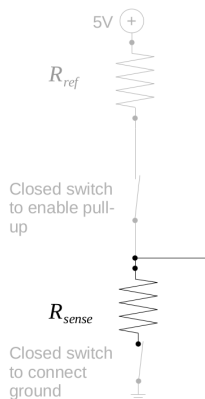


Figure 5: Resistive pressure sensor used in capacitive and resistive setup in resistive sensing mode. Grey items are internal to the microcontroller.

nal pull up resistor is not used and the to electrode of the pressure sensor is only connected to the analog input. The bottom electrode is connected to a pin that is configured as digital input, which effectively means that the sensor is floating. This is exactly the setup that is needed for the CVD method.

Since the ADC in modern microcontrollers is very fast (typically 1 million samples per second or more), the microcontroller can rapidly switch between the resistive sensing and capacitive sensing mode and use the same sensor for both resistive pressure sensing and capacitive presence sensing.

Software Features

In many resistive pressure sensing or capacitive presence sensing applications relative measurements are sufficient. In such cases, a state machine which tracks any background variations on the signal level is a simple and effective method to reduce noise. In our case, both the resistive sensor signals and the capacitive sensor signals use the following state machine where each signal has its own instance and its own parameter settings.

The state machine for each sensor can be in five states: Calibrating, Released, Released to Pressed, Pressed and Pressed to Released. This is shown in Figure 6.

In the Calibrating and Released states, the background variations are tracked using an exponential decaying filter and stored in average a . In all other states the background variations are not tracked. In the Released state, if the most recent measurement x is more than P counts below average a , the state is changed to Released to Pressed. If in the next measurement x is less than P counts below the average, the state is changed back to Released. If however the next C measurements are all more than P counts

below this average, the state is changed to Pressed.

Similarly the state moves from the Pressed state to the Pressed to Released state and from Pressed to Released to the Released state.

To account for stuck buttons (for example: when the user unintentionally placed a large conductive object very close to the capacitive touch sensor while the sensor was in Released state), there is a maximum time that the sensor can be in the Pressed state. If after this time the sensor is still in the Pressed state, it is changed to the Calibrating state and the sensor will start recalibrating.

By changing the parameters N , C , P and R the amount of filtering and speed of detection can be tuned to the application. Once they are tuned properly, the difference of x and a is a measure for how close a user is to the sensor (in capacitive sensing mode) or for how much pressure a user applies to the sensor (in resistive sensing mode).

Shielding

In capacitive sensing mode, the bottom electrode of the resistive pressure sensor is floating. In this mode the pressure sensitive resistive material in between can be seen effectively as a conductor and thus the whole sensor can be seen as just a single electrode. The electric field of the sensor will therefore also fringe all around the sensor, including the bottom side. As the electric field is also present at the underside of the sensor, the sensor is not only sensitive for the presence of human body parts above the sensor, but also below. If the capacitance underneath the sensor is relatively constant, tuning of the state machine could be sufficient to filter this out and make the sensor only sensitive to large and / or rapid variations.




Figure 7: State machine for resistive and capacitive measurements to track background variations.




Figure 8: Circuit to shield underside of capacitive sensor.

However, for some applications such as loose fitting clothing, this might not be sufficient. In such cases, the sensor can be made less sensitive by adding a shield underneath the sensor. Connecting this shield to ground effectively removes all of the capacitance variation but also reduces the sensitivity of the sensor. By connecting the sensor itself to the input of a 1 x opamp and the output of the opamp to the shield, the voltage of the shield is always very close to the voltage on the sensor itself. As a result, the electric field underneath the sensor is virtually zero and no sensitivity is lost. Note that for proper shielding, also the cable to the sensor should be shielded. A schematic diagram of this setup is shown in Figure 7.

Mechanical Features

An overview of the stackup of the total sensor is shown in Figure 8. In this figure, the electrode and shield material can be conductive textile, the insulating material can be any non-compressible insulating material (for example cotton) and the pressure sensitive material can be Velostat or ESD foam.

Conclusion

The possibilities of a reliable, textile, soft presence and pressure sensor are numerous. This reliability was detailed in the combination of capacitive distance sensing using the CVD method for presence sensing with resistive sensing for pressure sensing. The robustness of the CVD method as well as the required circuit and microcontroller features make it ideal to combine with existing resistive pressure sensing applications to enhance the user experience by not only sensing how hard a user presses on a button but already giving feedback to the user when approaching the button. The choice of textiles increases the reliability and performance of the sensor in their specific contexts. In the use of a shoes we can understand not only how hard the

foot is being pressed, but if the foot is disconnecting from the shoe. In garments we can understand how multiple people approach and touch each other in performance or everyday activities. In the context of a automotive steering wheel we can understand not only where someone is touching, but how they move there hands when engaged in an maneuver such as turning a corner. The use of multiple sensors for greater movement vector and specific specific touch location sensing is a serious possibility that the authors intend to explore further.

Acknowledgements

The authors would like to thank the Wearable Senses Lab, /dSearch Lab and E-Labs along with the Designing Quality in Interaction group of the Industrial Design department of the Eindhoven University of Technology. Support for this project also comes from the Marie Curie Horizon 2020 Action ArcInTexETN. Special thanks to Dr. Oscar Tomico and Dr. Stephan Wensveen of TU Eindhoven.