
STM32
CubeMX

1. Description

1.1. Project

Project Name	Base200Tester
Board Name	custom
Generated with:	STM32CubeMX 6.2.1
Date	05/14/2021

1.2. MCU

MCU Series	STM32F7
MCU Line	STM32F7x6
MCU name	STM32F746ZGTx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	Arm Cortex-M7

2. Pinout Configuration

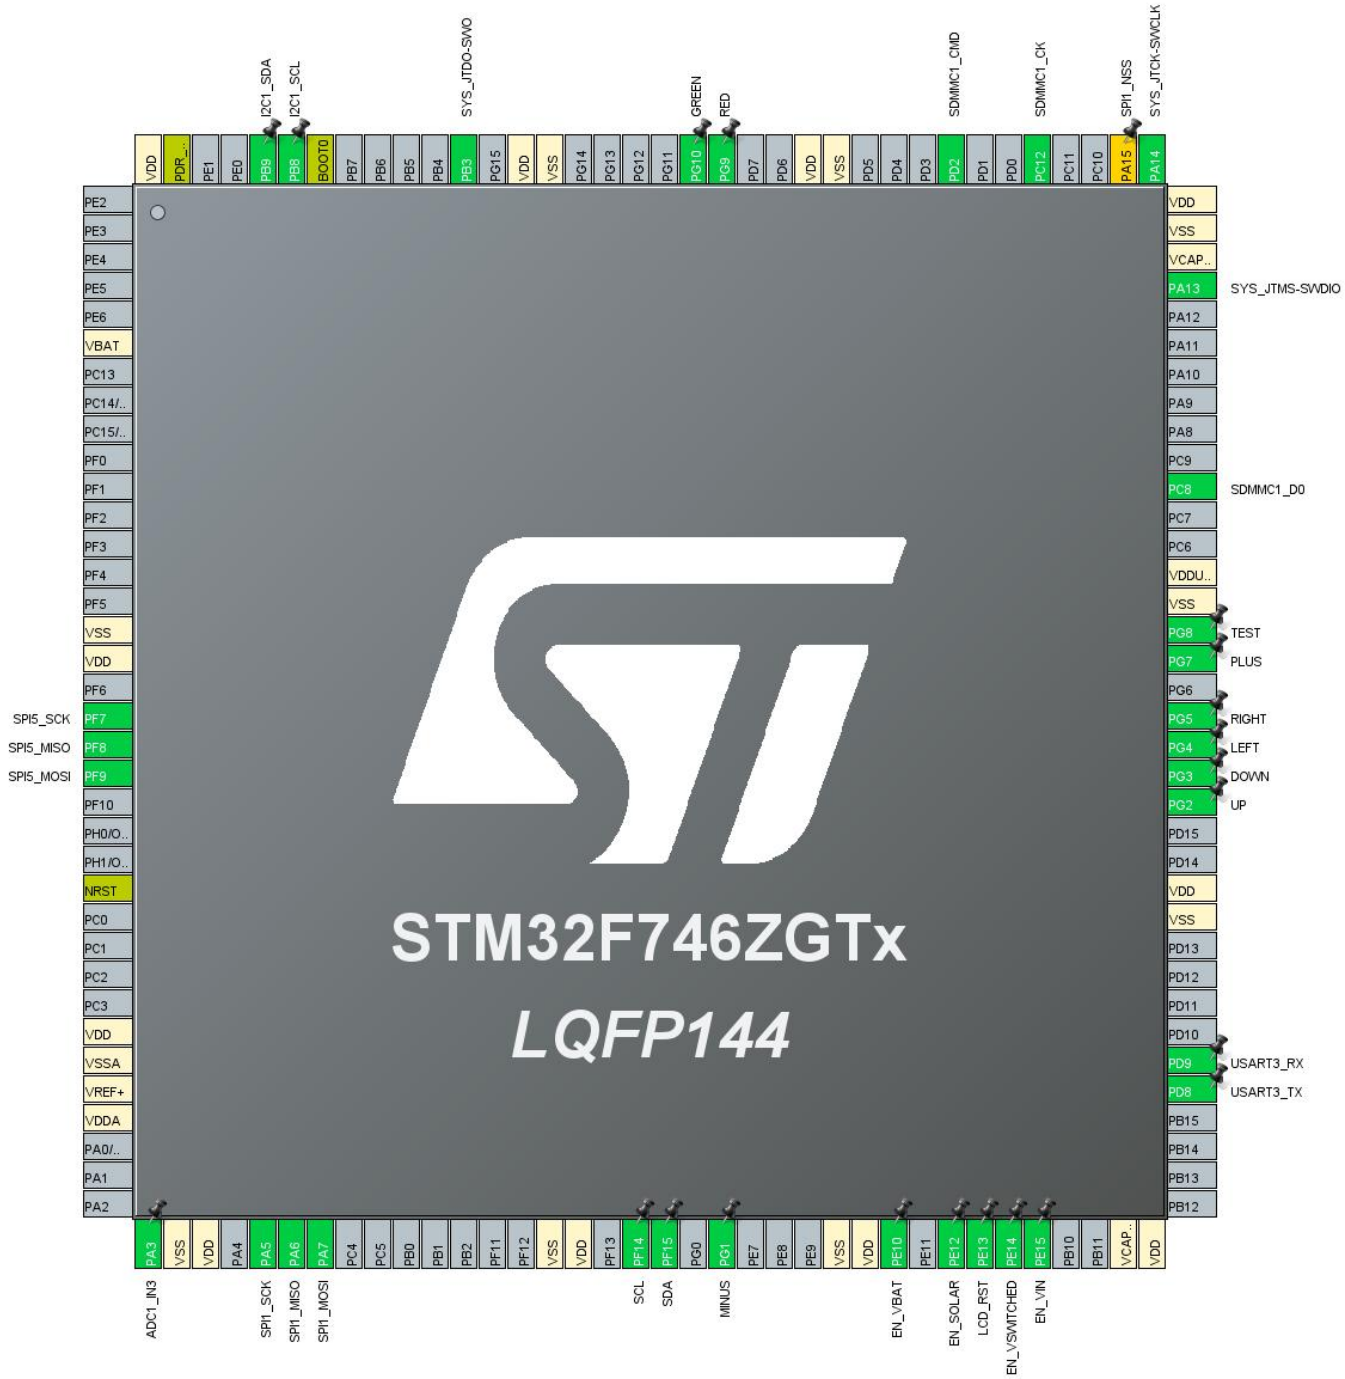

3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
16	VSS	Power		
17	VDD	Power		
19	PF7	I/O	SPI5_SCK	
20	PF8	I/O	SPI5_MISO	
21	PF9	I/O	SPI5_MOSI	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
37	PA3	I/O	ADC1_IN3	
38	VSS	Power		
39	VDD	Power		
41	PA5	I/O	SPI1_SCK	
42	PA6	I/O	SPI1_MISO	
43	PA7	I/O	SPI1_MOSI	
51	VSS	Power		
52	VDD	Power		
54	PF14 *	I/O	GPIO_Output	SCL
55	PF15 *	I/O	GPIO_Output	SDA
57	PG1 *	I/O	GPIO_Input	MINUS
61	VSS	Power		
62	VDD	Power		
63	PE10 *	I/O	GPIO_Output	EN_VBAT
65	PE12 *	I/O	GPIO_Output	EN_SOLAR
66	PE13 *	I/O	GPIO_Output	LCD_RST
67	PE14 *	I/O	GPIO_Output	EN_VSWITCHED
68	PE15 *	I/O	GPIO_Output	EN_VIN
71	VCAP_1	Power		
72	VDD	Power		
77	PD8	I/O	USART3_TX	
78	PD9	I/O	USART3_RX	
83	VSS	Power		
84	VDD	Power		
87	PG2 *	I/O	GPIO_Input	UP

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
88	PG3 *	I/O	GPIO_Input	DOWN
89	PG4 *	I/O	GPIO_Input	LEFT
90	PG5 *	I/O	GPIO_Input	RIGHT
92	PG7 *	I/O	GPIO_Input	PLUS
93	PG8 *	I/O	GPIO_Input	TEST
94	VSS	Power		
95	VDDUSB	Power		
98	PC8	I/O	SDMMC1_D0	
105	PA13	I/O	SYS_JTMS-SWDIO	
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	
110	PA15 **	I/O	SPI1_NSS	
113	PC12	I/O	SDMMC1_CK	
116	PD2	I/O	SDMMC1_CMD	
120	VSS	Power		
121	VDD	Power		
124	PG9 *	I/O	GPIO_Output	RED
125	PG10 *	I/O	GPIO_Output	GREEN
130	VSS	Power		
131	VDD	Power		
133	PB3	I/O	SYS_JTDO-SWO	
138	BOOT0	Boot		
139	PB8	I/O	I2C1_SCL	
140	PB9	I/O	I2C1_SDA	
143	PDR_ON	Reset		
144	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

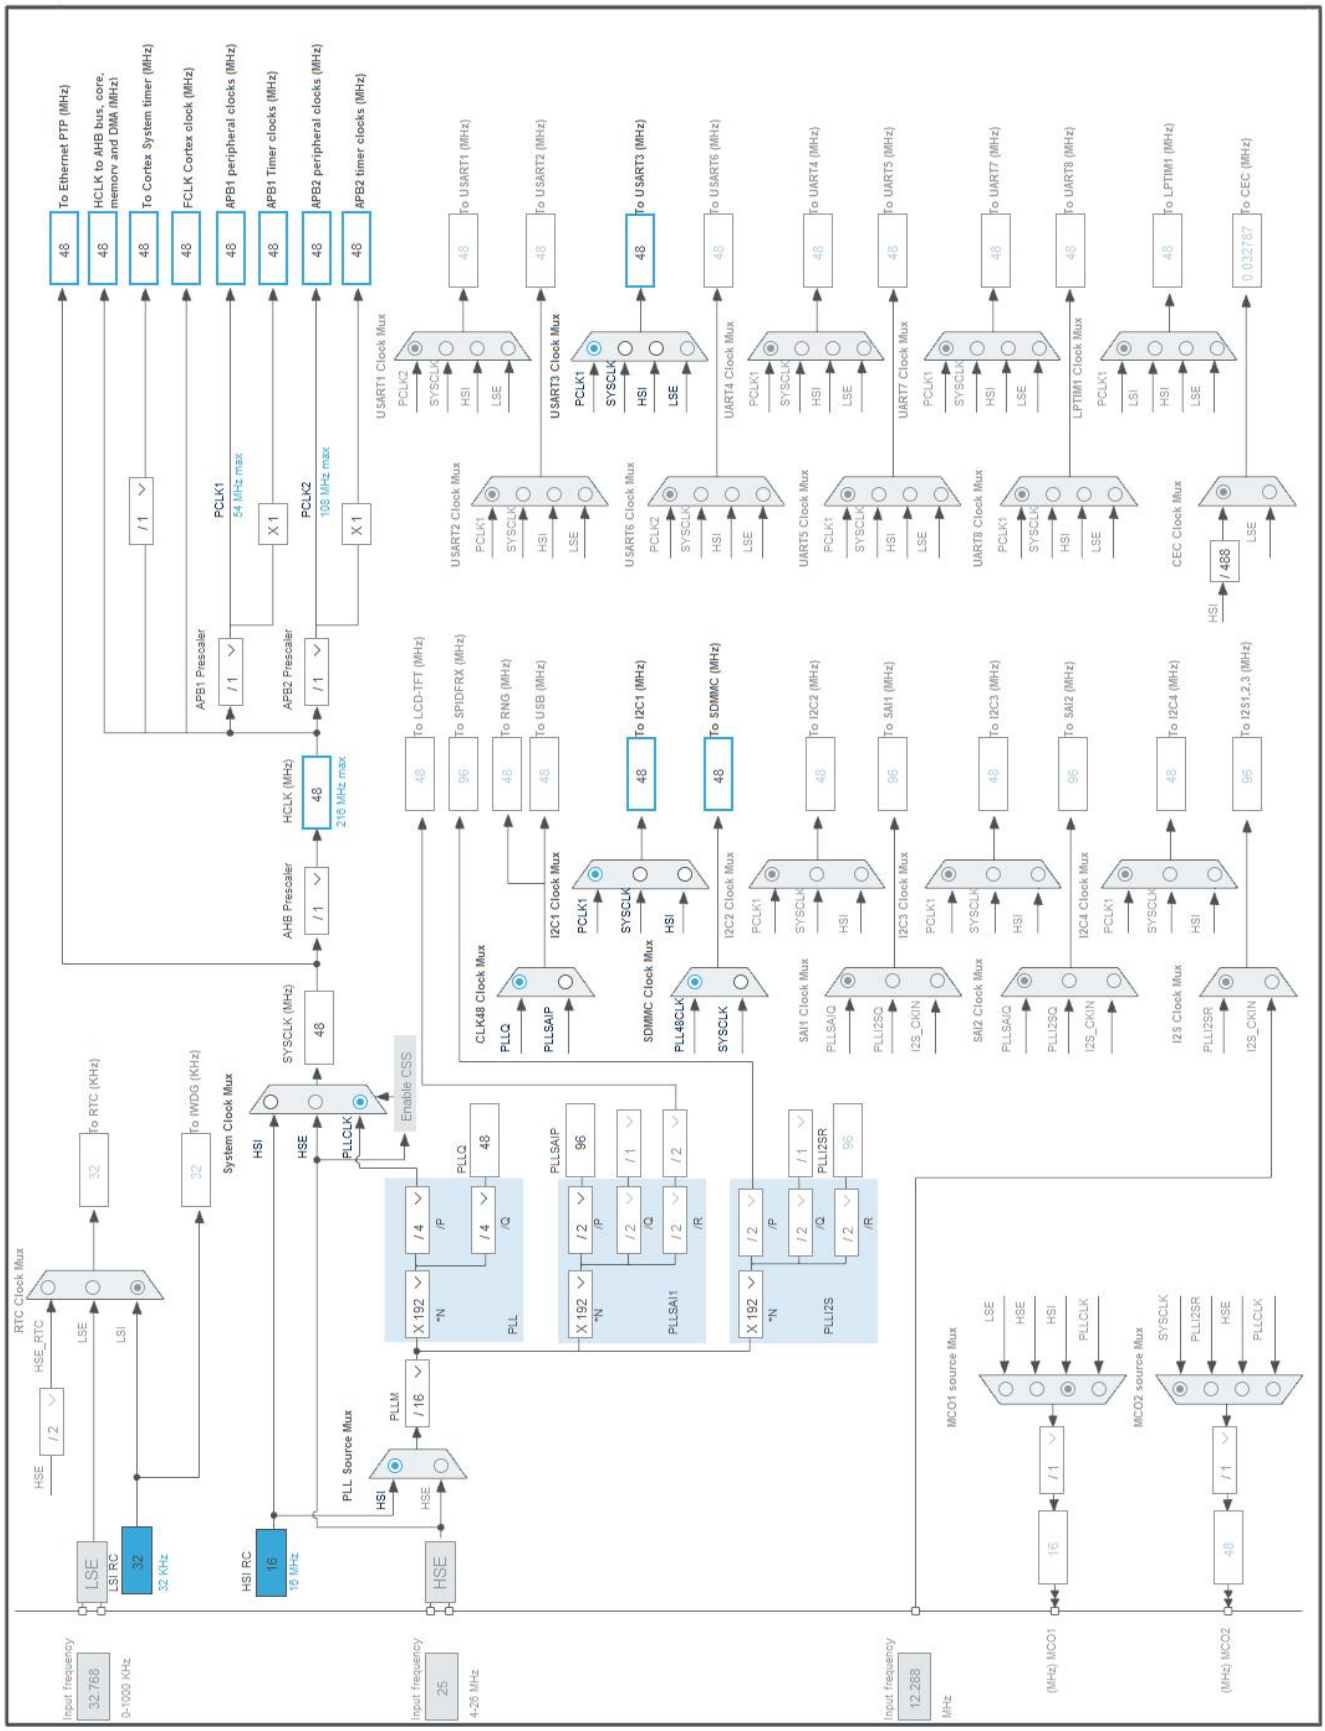

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Base200Tester
Project Folder	G:\.shortcut-targets-by-
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F7 V1.16.0
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x4000
Minimum Stack Size	0x800

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	MX_DMA_Init	DMA
3	SystemClock_Config	RCC
4	MX_SDMMC1_SD_Init	SDMMC1
5	MX_FATFS_Init	FATFS
6	MX_TIM1_Init	TIM1
7	MX_USART3_UART_Init	USART3
8	MX_SPI5_Init	SPI5
9	MX_ADC1_Init	ADC1
10	MX_SPI1_Init	SPI1
11	MX_I2C1_Init	I2C1

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F7
Line	STM32F7x6
MCU	STM32F746ZGTx
Datasheet	DS10916_Rev4

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Alkaline(9V)
Capacity	625.0 mAh
Self Discharge	0.3 %/month
Nominal Voltage	9.0 V
Max Cont Current	200.0 mA
Max Pulse Current	0.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP_UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	ITCM/FLASH/REGON	n/a
CPU Frequency	216 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	130 mA	100 µA
Duration	0.1 ms	0.9 ms
DMIPS	462.0	0.0
Ta Max	87.84	104.99
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	13.09 mA
Battery Life	1 day, 23 hours	Average DMIPS	462.24005 DMIPS

6.6. Chart

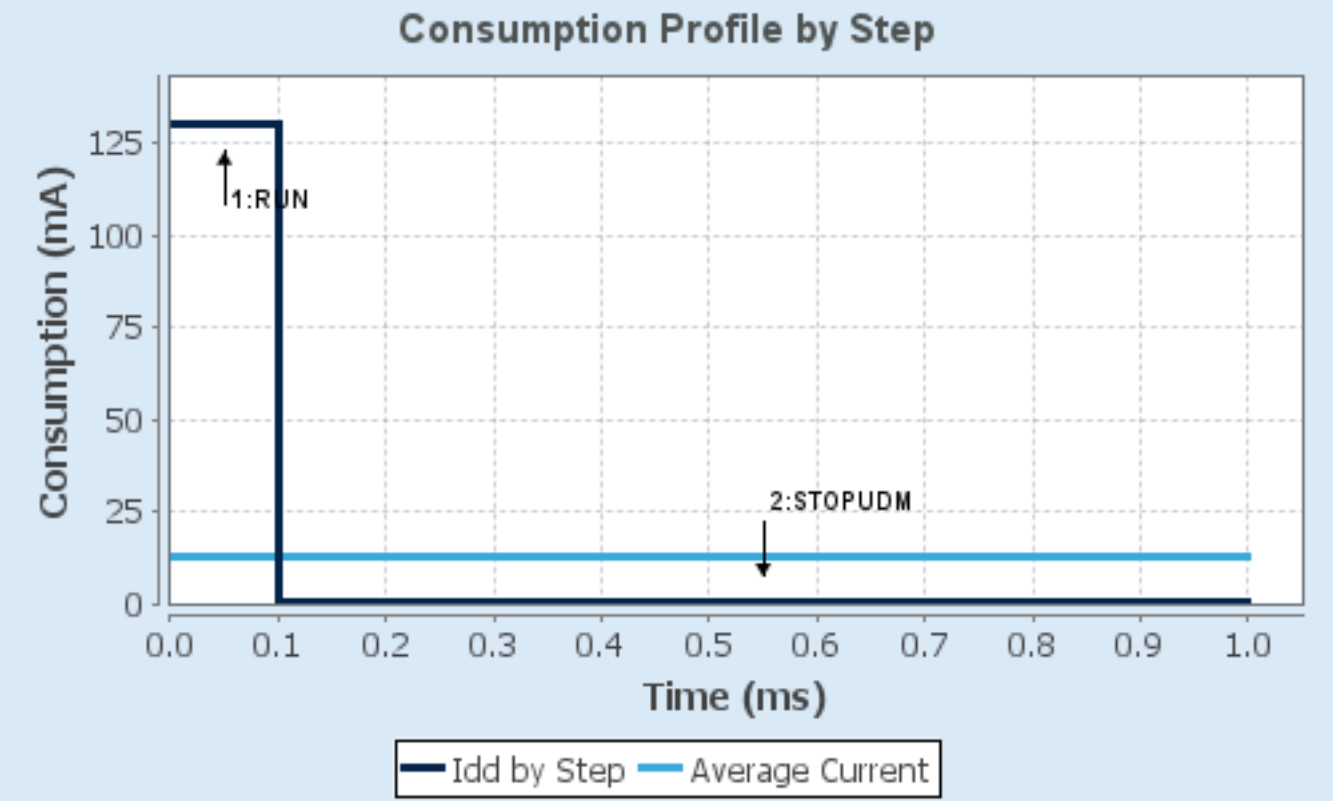
Consumption Profile by Step
Consumption (mA)
125
100
75
50
25
0
1:RUN
2:STOPUDM
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
Time (ms)
Idd by Step
Average Current

7. Peripherals and Middlewares Configuration

7.1. ADC1

mode: IN3

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	PCLK2 divided by 2
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 3
Sampling Time	3 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

7.2. I2C1

I2C: I2C

7.2.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0

Analog Filter	Enabled
Timing	**0x20303E5D ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

7.3. RCC

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Flash Latency(WS)	1 WS (2 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Over Drive	Enabled
Power Regulator Voltage Scale	Power Regulator Voltage Scale 3

7.4. SDMMC1

Mode: SD 1 bit

7.4.1. Parameter Settings:

SDMMC parameters:

Clock transition on which the bit capture is made	Rising transition
SDMMC Clock divider bypass	Disable
SDMMC Clock output enable when the bus is idle	Disable the power save for the clock
SDMMC hardware flow control	The hardware control flow is disabled
SDMMCCLK clock divide factor	0

7.5. SPI1

Mode: Full-Duplex Master

7.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	**24.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

7.6. SPI5

Mode: Full-Duplex Master

7.6.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**8 ***
Baud Rate	**6.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

7.7. SYS

Debug: Trace Asynchronous Sw

Timebase Source: SysTick

7.8. TIM1

Clock Source : Internal Clock

7.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**48-1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

7.9. USART3

Mode: Asynchronous

7.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable

TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

7.10. FATFS

mode: SD Card

7.10.1. Set Defines:

Version:

FATFS version	R0.12c

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp

FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
FS_LOCK (Number of files opened simultaneously)	2

7.10.2. Advanced Settings:

SDIO/SDMMC:

SDMMC instance	SDMMC1
Use dma template	**Enabled ***
BSP code for SD	Generic

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA3	ADC1_IN3	Analog mode	No pull-up and no pull-down	n/a	
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	**Very High ***	
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	**Very High ***	
SDMMC1	PC8	SDMMC1_D0	Alternate Function Push Pull	**Pull-up ***	Very High	
	PC12	SDMMC1_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PD2	SDMMC1_CMD	Alternate Function Push Pull	**Pull-up ***	Very High	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
SPI5	PF7	SPI5_SCK	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PF8	SPI5_MISO	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PF9	SPI5_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	
USART3	PD8	USART3_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
	PD9	USART3_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
Single Mapped Signals	PA15	SPI1_NSS	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	
GPIO	PF14	GPIO_Output	**Output Open Drain ***	No pull-up and no pull-down	Low	SCL
	PF15	GPIO_Output		No pull-up and no pull-down	Low	SDA

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
			Output Open Drain *			
	PG1	GPIO_Input	Input mode	**Pull-up ***	n/a	MINUS
	PE10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	EN_VBAT
	PE12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	EN_SOLAR
	PE13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LCD_RST
	PE14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	EN_VSWITCHED
	PE15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	EN_VIN
	PG2	GPIO_Input	Input mode	**Pull-up ***	n/a	UP
	PG3	GPIO_Input	Input mode	**Pull-up ***	n/a	DOWN
	PG4	GPIO_Input	Input mode	**Pull-up ***	n/a	LEFT
	PG5	GPIO_Input	Input mode	**Pull-up ***	n/a	RIGHT
	PG7	GPIO_Input	Input mode	**Pull-up ***	n/a	PLUS
	PG8	GPIO_Input	Input mode	**Pull-up ***	n/a	TEST
	PG9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RED
	PG10	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	GREEN

8.2. DMA configuration

DMA request	Stream	Direction	Priority
SDMMC1_RX	DMA2_Stream3	Peripheral To Memory	Low
SDMMC1_TX	DMA2_Stream6	Memory To Peripheral	Low

SDMMC1_RX: DMA2_Stream3 DMA request Settings:

Mode:	**Peripheral Flow Control ***
Use fifo:	**Enable ***
FIFO Threshold:	Full
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	Word
Peripheral Burst Size:	**4 Increment ***
Memory Burst Size:	4 Increment

SDMMC1_TX: DMA2_Stream6 DMA request Settings:

Mode:	**Peripheral Flow Control ***
Use fifo:	**Enable ***
FIFO Threshold:	Full
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	**Word ***
Memory Data Width:	Word
Peripheral Burst Size:	**4 Increment ***
Memory Burst Size:	4 Increment

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
SDMMC1 global interrupt	true	0	0
DMA2 stream3 global interrupt	true	0	0
DMA2 stream6 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1, ADC2 and ADC3 global interrupts	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 update interrupt and TIM10 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		
USART3 global interrupt	unused		
FPU global interrupt	unused		
SPI5 global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
SDMMC1 global interrupt	false	true	true
DMA2 stream3 global interrupt	false	true	true
DMA2 stream6 global interrupt	false	true	true

*** User modified value**

9. System Views

9.1. Category view

9.1.1. Current

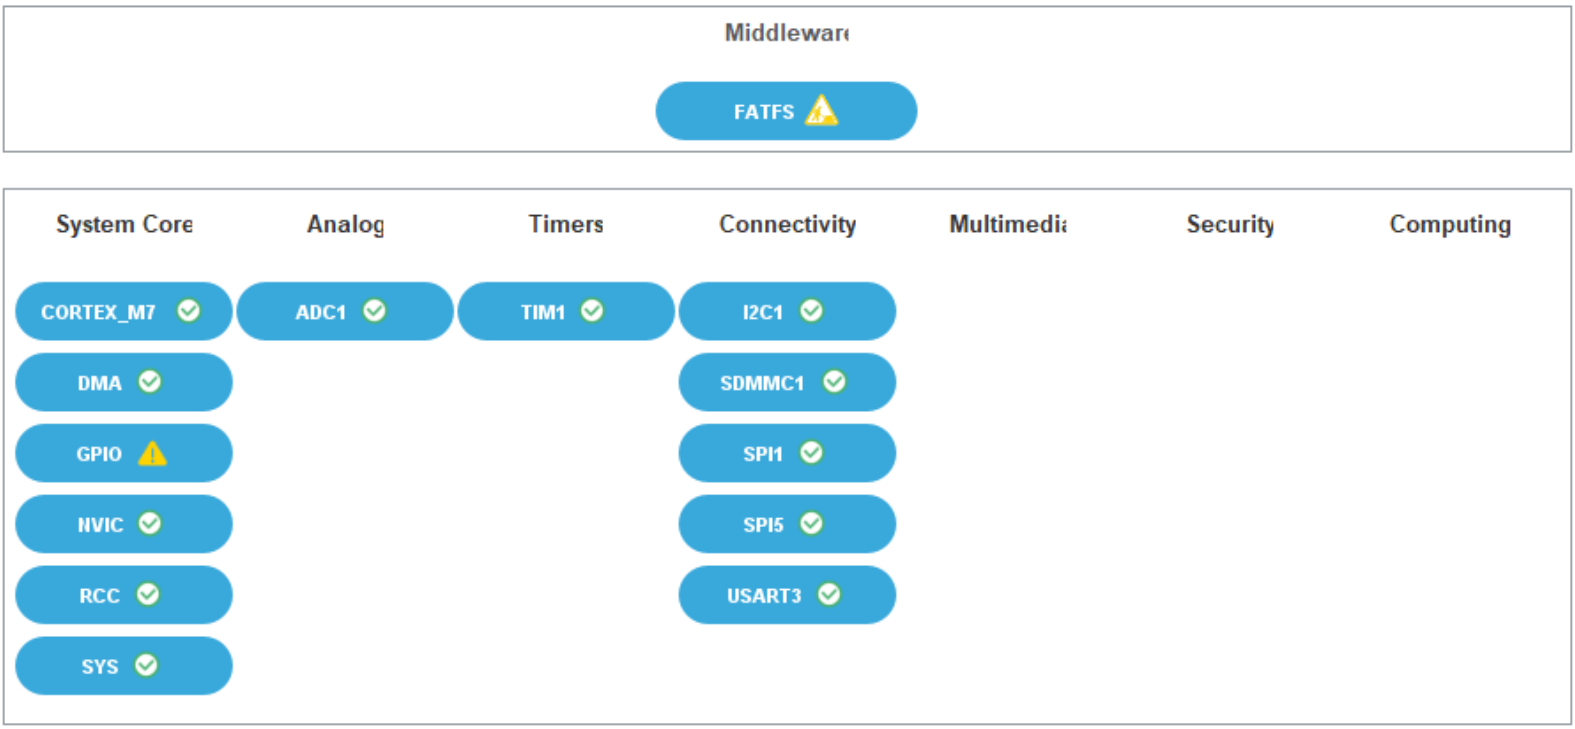

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00166116.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00124865.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00237416.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00145382.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00046011.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf
Application note	http://www.st.com/resource/en/application_note/DM00164538.pdf
Application note	http://www.st.com/resource/en/application_note/DM00164549.pdf
Application note	http://www.st.com/resource/en/application_note/DM00173083.pdf
Application note	http://www.st.com/resource/en/application_note/DM00210367.pdf
Application note	http://www.st.com/resource/en/application_note/DM00220769.pdf
Application note	http://www.st.com/resource/en/application_note/DM00227538.pdf

Application note	http://www.st.com/resource/en/application_note/DM00257177.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272912.pdf
Application note	http://www.st.com/resource/en/application_note/DM00272913.pdf
Application note	http://www.st.com/resource/en/application_note/DM00226326.pdf
Application note	http://www.st.com/resource/en/application_note/DM00236305.pdf
Application note	http://www.st.com/resource/en/application_note/DM00281138.pdf
Application note	http://www.st.com/resource/en/application_note/DM00296349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00327191.pdf
Application note	http://www.st.com/resource/en/application_note/DM00287603.pdf
Application note	http://www.st.com/resource/en/application_note/DM00340311.pdf
Application note	http://www.st.com/resource/en/application_note/DM00337702.pdf
Application note	http://www.st.com/resource/en/application_note/DM00354244.pdf
Application note	http://www.st.com/resource/en/application_note/DM00373474.pdf
Application note	http://www.st.com/resource/en/application_note/DM00315319.pdf
Application note	http://www.st.com/resource/en/application_note/DM00380469.pdf
Application note	http://www.st.com/resource/en/application_note/DM00395696.pdf
Application note	http://www.st.com/resource/en/application_note/DM00431633.pdf
Application note	http://www.st.com/resource/en/application_note/DM00493651.pdf
Application note	http://www.st.com/resource/en/application_note/DM00536349.pdf
Application note	http://www.st.com/resource/en/application_note/DM00600614.pdf
Application note	http://www.st.com/resource/en/application_note/DM00725181.pdf