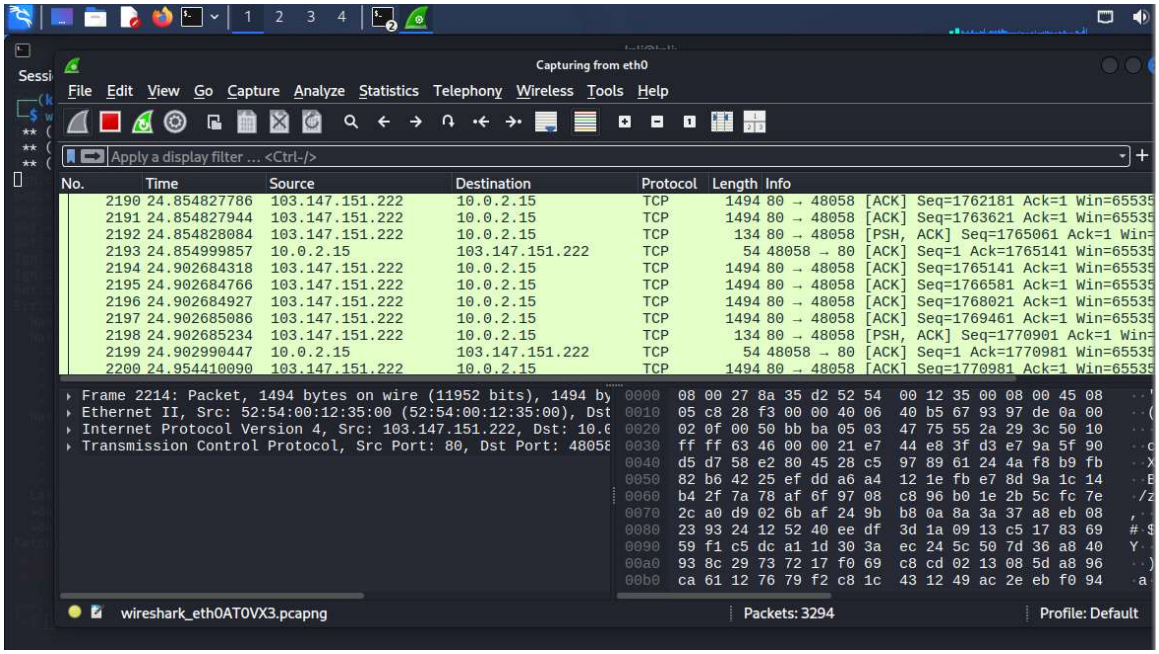
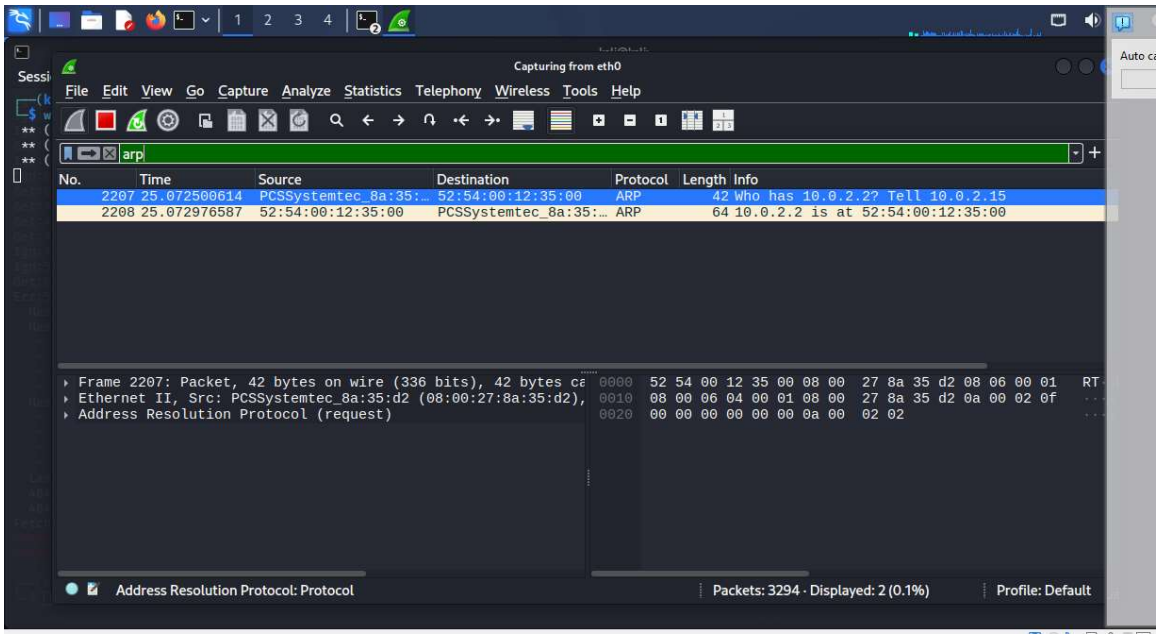
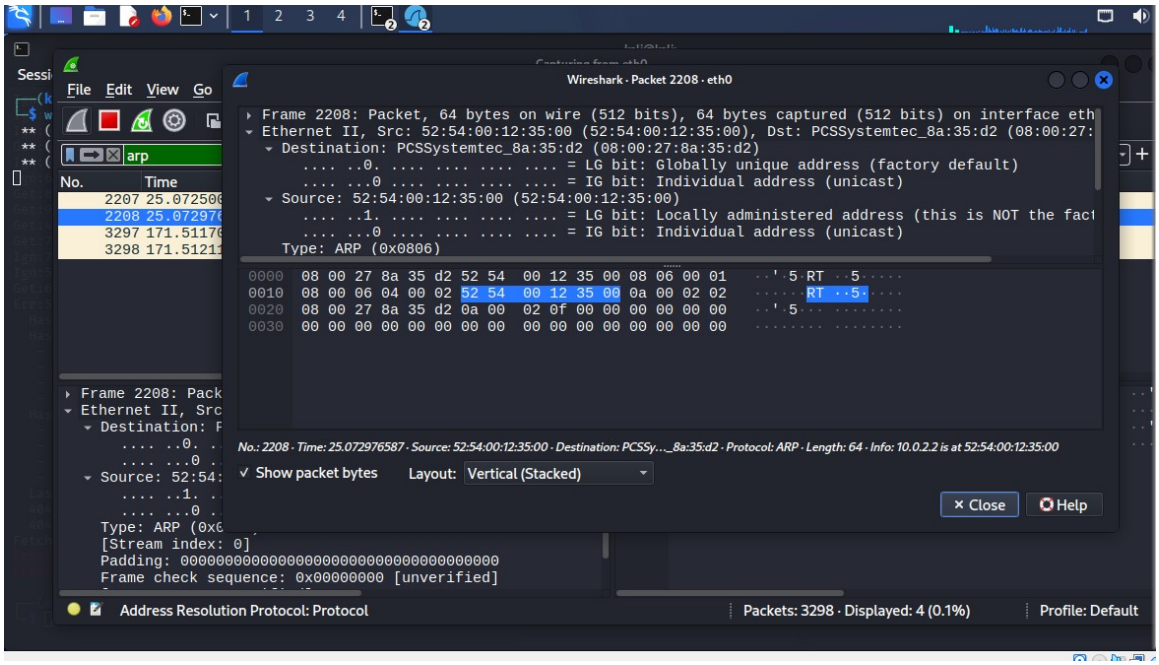
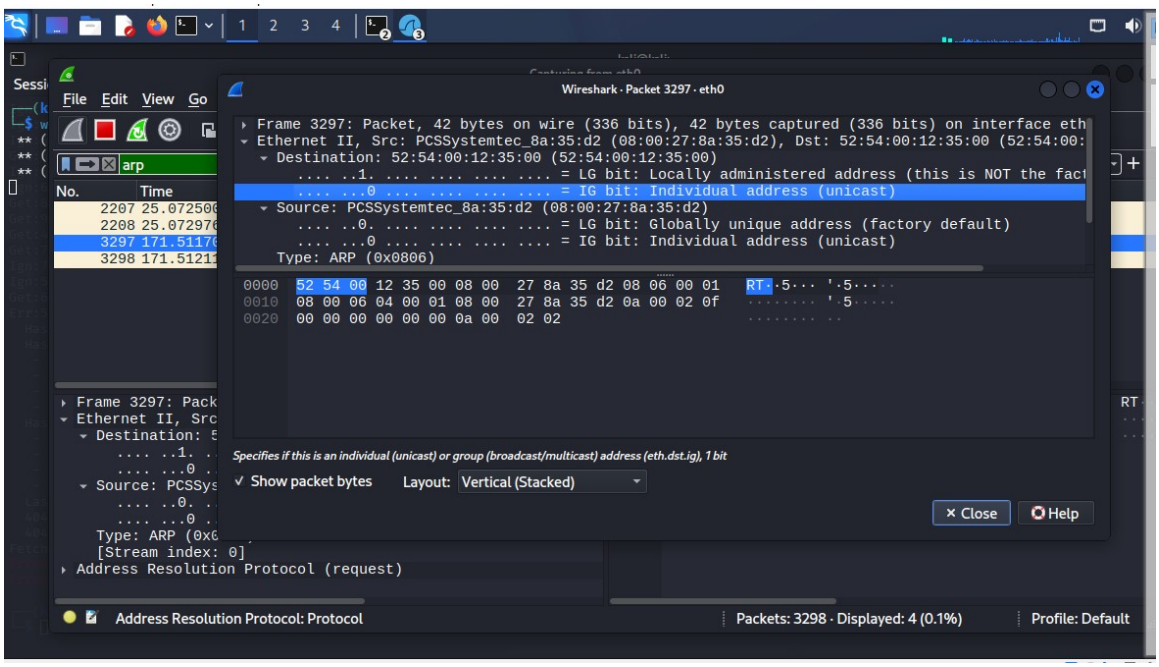
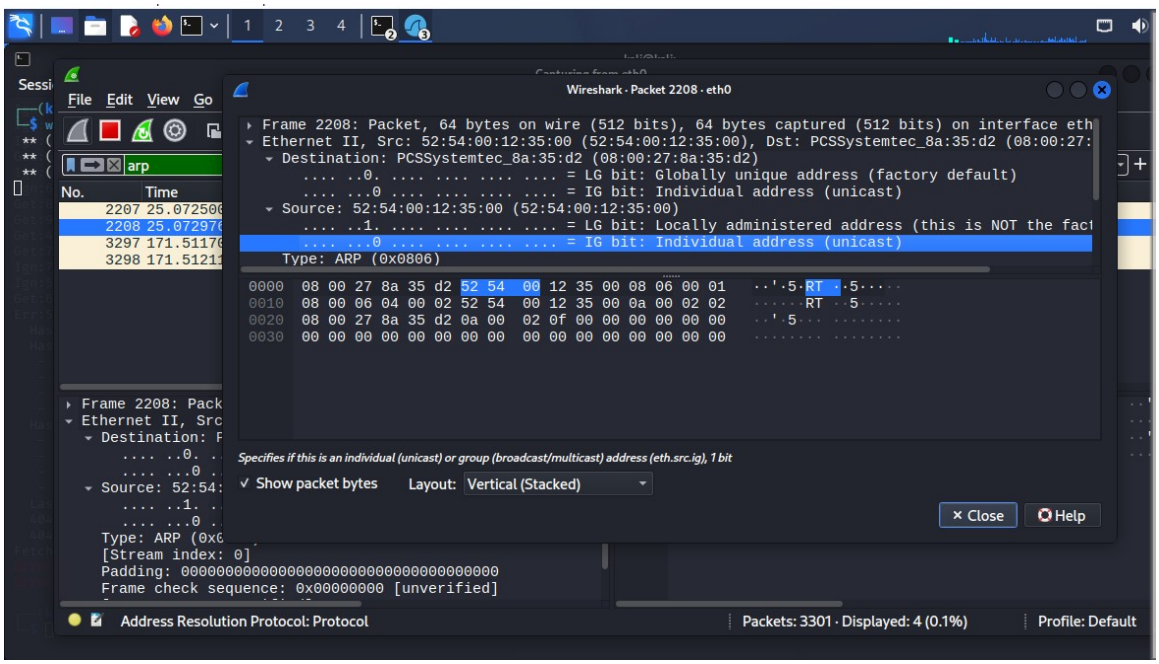

Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
No. Time Source Destination Protocol Length Info
2190 24.854827786 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1762181 Ack=1 Win=65535
2191 24.854827944 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1763621 Ack=1 Win=65535
2192 24.854828084 103.147.151.222 10.0.2.15 TCP 134 80 → 48058 [PSH, ACK] Seq=1765061 Ack=1 Win=
2193 24.854999857 10.0.2.15 103.147.151.222 TCP 54 48058 → 80 [ACK] Seq=1 Ack=1765141 Win=65535
2194 24.902684318 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1765141 Ack=1 Win=65535
2195 24.902684766 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1766581 Ack=1 Win=65535
2196 24.902684927 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1768021 Ack=1 Win=65535
2197 24.902685086 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1769461 Ack=1 Win=65535
2198 24.902685234 103.147.151.222 10.0.2.15 TCP 134 80 → 48058 [PSH, ACK] Seq=1770901 Ack=1 Win=
2199 24.902990447 10.0.2.15 103.147.151.222 TCP 54 48058 → 80 [ACK] Seq=1 Ack=1770981 Win=65535
2200 24.954410090 103.147.151.222 10.0.2.15 TCP 1494 80 → 48058 [ACK] Seq=1770981 Ack=1 Win=65535
Frame 2214: Packet, 1494 bytes on wire (11952 bits), 1494 by
Ethernet II, Src: 52:54:00:12:35:00 (52:54:00:12:35:00), Dst
Internet Protocol Version 4, Src: 103.147.151.222, Dst: 10.0
Transmission Control Protocol, Src Port: 80, Dst Port: 48058
0000 08 00 27 8a 35 d2 52 54 00 12 35 00 08 00 45 08
0010 05 c8 28 f3 00 00 40 06 40 b5 67 93 97 de 0a 00
0020 02 0f 00 50 bb ba 05 03 47 75 55 2a 29 3c 50 10
0030 ff ff 63 46 00 00 21 e7 44 e8 3f d3 e7 9a 5f 90
0040 d5 d7 58 e2 80 45 28 c5 97 89 61 24 4a f8 b9 fb
0050 82 b6 42 25 ef dd a6 a4 12 1e fb e7 8d 9a 1c 14
0060 b4 2f 7a 78 af 6f 97 08 c8 96 b0 1e 2b 5c fc 7e
0070 2c a0 d9 02 6b af 24 9b b8 0a 8a 3a 37 a8 eb 08
0080 23 93 24 12 52 40 ee df 3d 1a 09 13 c5 17 83 69
0090 59 f1 c5 dc a1 1d 30 3a ec 24 5c 50 7d 36 a8 40
00a0 93 8c 29 73 72 17 f0 69 c8 cd 02 13 08 5d a8 96
00b0 ca 61 12 76 79 f2 c8 1c 43 12 49 ac 2e eb f0 94
wireshark_eth0AT0VX3.pcapng
Packets: 3294
Profile: Default


Capturing from eth0
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
arp
No. Time Source Destination Protocol Length Info
2207 25.072500614 PCSSystemtec_8a:35:... 52:54:00:12:35:00 ARP 42 Who has 10.0.2.2? Tell 10.0.2.15
2208 25.072976587 52:54:00:12:35:00 PCSSystemtec_8a:35:... ARP 64 10.0.2.2 is at 52:54:00:12:35:00
Frame 2207: Packet, 42 bytes on wire (336 bits), 42 bytes ca
Ethernet II, Src: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2),
Address Resolution Protocol (request)
0000 52 54 00 12 35 00 08 00 27 8a 35 d2 08 06 00 01
0010 08 00 06 04 00 01 08 00 27 8a 35 d2 0a 00 02 0f
0020 00 00 00 00 00 00 0a 00 02 02
Address Resolution Protocol: Protocol
Packets: 3294 · Displayed: 2 (0.1%)
Profile: Default


Wireshark · Packet 2208 · eth0
File Edit View Go
arp
No. Time
2207 25.072506
2208 25.072976
3297 171.51176
3298 171.51211
Frame 2208: Packet, 64 bytes on wire (512 bits), 64 bytes captured (512 bits) on interface eth
Ethernet II, Src: 52:54:00:12:35:00 (52:54:00:12:35:00), Dst: PCSSystemtec_8a:35:d2 (08:00:27:
Destination: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2)
.... ..0. .... = LG bit: Globally unique address (factory default)
....0 .... = IG bit: Individual address (unicast)
Source: 52:54:00:12:35:00 (52:54:00:12:35:00)
.... ..1. .... = LG bit: Locally administered address (this is NOT the fact
....0 .... = IG bit: Individual address (unicast)
Type: ARP (0x0806)
0000 08 00 27 8a 35 d2 52 54 00 12 35 00 08 06 00 01
0010 08 00 06 04 00 02 52 54 00 12 35 00 0a 00 02 02
0020 08 00 27 8a 35 d2 0a 00 02 0f 00 00 00 00 00 00
0030 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
No.: 2208 · Time: 25.072976587 · Source: 52:54:00:12:35:00 · Destination: PCSSy..._8a:35:d2 · Protocol: ARP · Length: 64 · Info: 10.0.2.2 is at 52:54:00:12:35:00
Show packet bytes
Layout: Vertical (Stacked)
Close
Help
Frame 2208: Pack
Ethernet II, Src
Destination: F
Source: 52:54:
Type: ARP (0x6
[Stream index: 0]
Padding: 00000000000000000000000000000000000000
Frame check sequence: 0x00000000 [unverified]
Address Resolution Protocol: Protocol
Packets: 3298 · Displayed: 4 (0.1%)
Profile: Default


Wireshark · Packet 3297 · eth0
File Edit View Go
arp
No. Time
2207 25.072506
2208 25.072976
3297 171.51176
3298 171.51211
Frame 3297: Packet, 42 bytes on wire (336 bits), 42 bytes captured (336 bits) on interface eth
Ethernet II, Src: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2), Dst: 52:54:00:12:35:00 (52:54:00:
Destination: 52:54:00:12:35:00 (52:54:00:12:35:00)
.... ..1. .... = LG bit: Locally administered address (this is NOT the fact
....0 .... = IG bit: Individual address (unicast)
Source: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2)
.... ..0. .... = LG bit: Globally unique address (factory default)
....0 .... = IG bit: Individual address (unicast)
Type: ARP (0x0806)
0000 52 54 00 12 35 00 08 00 27 8a 35 d2 08 06 00 01
0010 08 00 06 04 00 01 08 00 27 8a 35 d2 0a 00 02 0f
0020 00 00 00 00 00 00 0a 00 02 02
Specifies if this is an individual (unicast) or group (broadcast/multicast) address (eth.dst.ig), 1 bit
Show packet bytes
Layout: Vertical (Stacked)
Close
Help
Frame 3297: Pack
Ethernet II, Src
Destination: 5
Source: PCSSys
Type: ARP (0x6
[Stream index: 0]
Address Resolution Protocol (request)
Address Resolution Protocol: Protocol
Packets: 3298 · Displayed: 4 (0.1%)
Profile: Default


Wireshark · Packet 2208 · eth0
File Edit View Go
arp
No. Time
2207 25.072506
2208 25.072976
3297 171.51176
3298 171.51211
Frame 2208: Packet, 64 bytes on wire (512 bits), 64 bytes captured (512 bits) on interface eth
Ethernet II, Src: 52:54:00:12:35:00 (52:54:00:12:35:00), Dst: PCSSystemtec_8a:35:d2 (08:00:27:
Destination: PCSSystemtec_8a:35:d2 (08:00:27:8a:35:d2)
.... ..0. .... = LG bit: Globally unique address (factory default)
....0 .... = IG bit: Individual address (unicast)
Source: 52:54:00:12:35:00 (52:54:00:12:35:00)
.... ..1. .... = LG bit: Locally administered address (this is NOT the fact
....0 .... = IG bit: Individual address (unicast)
Type: ARP (0x0806)
0000 08 00 27 8a 35 d2 52 54 00 12 35 00 08 06 00 01
0010 08 00 06 04 00 02 52 54 00 12 35 00 0a 00 02 02
0020 08 00 27 8a 35 d2 0a 00 02 0f 00 00 00 00 00 00
0030 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Specifies if this is an individual (unicast) or group (broadcast/multicast) address (eth.src.ig), 1 bit
Show packet bytes
Layout: Vertical (Stacked)
Close
Help
Frame 2208: Pack
Ethernet II, Src
Destination: F
Source: 52:54:
Type: ARP (0x6
[Stream index: 0]
Padding: 000000000000000000000000000000000000
Frame check sequence: 0x00000000 [unverified]
Address Resolution Protocol: Protocol
Packets: 3301 · Displayed: 4 (0.1%)
Profile: Default