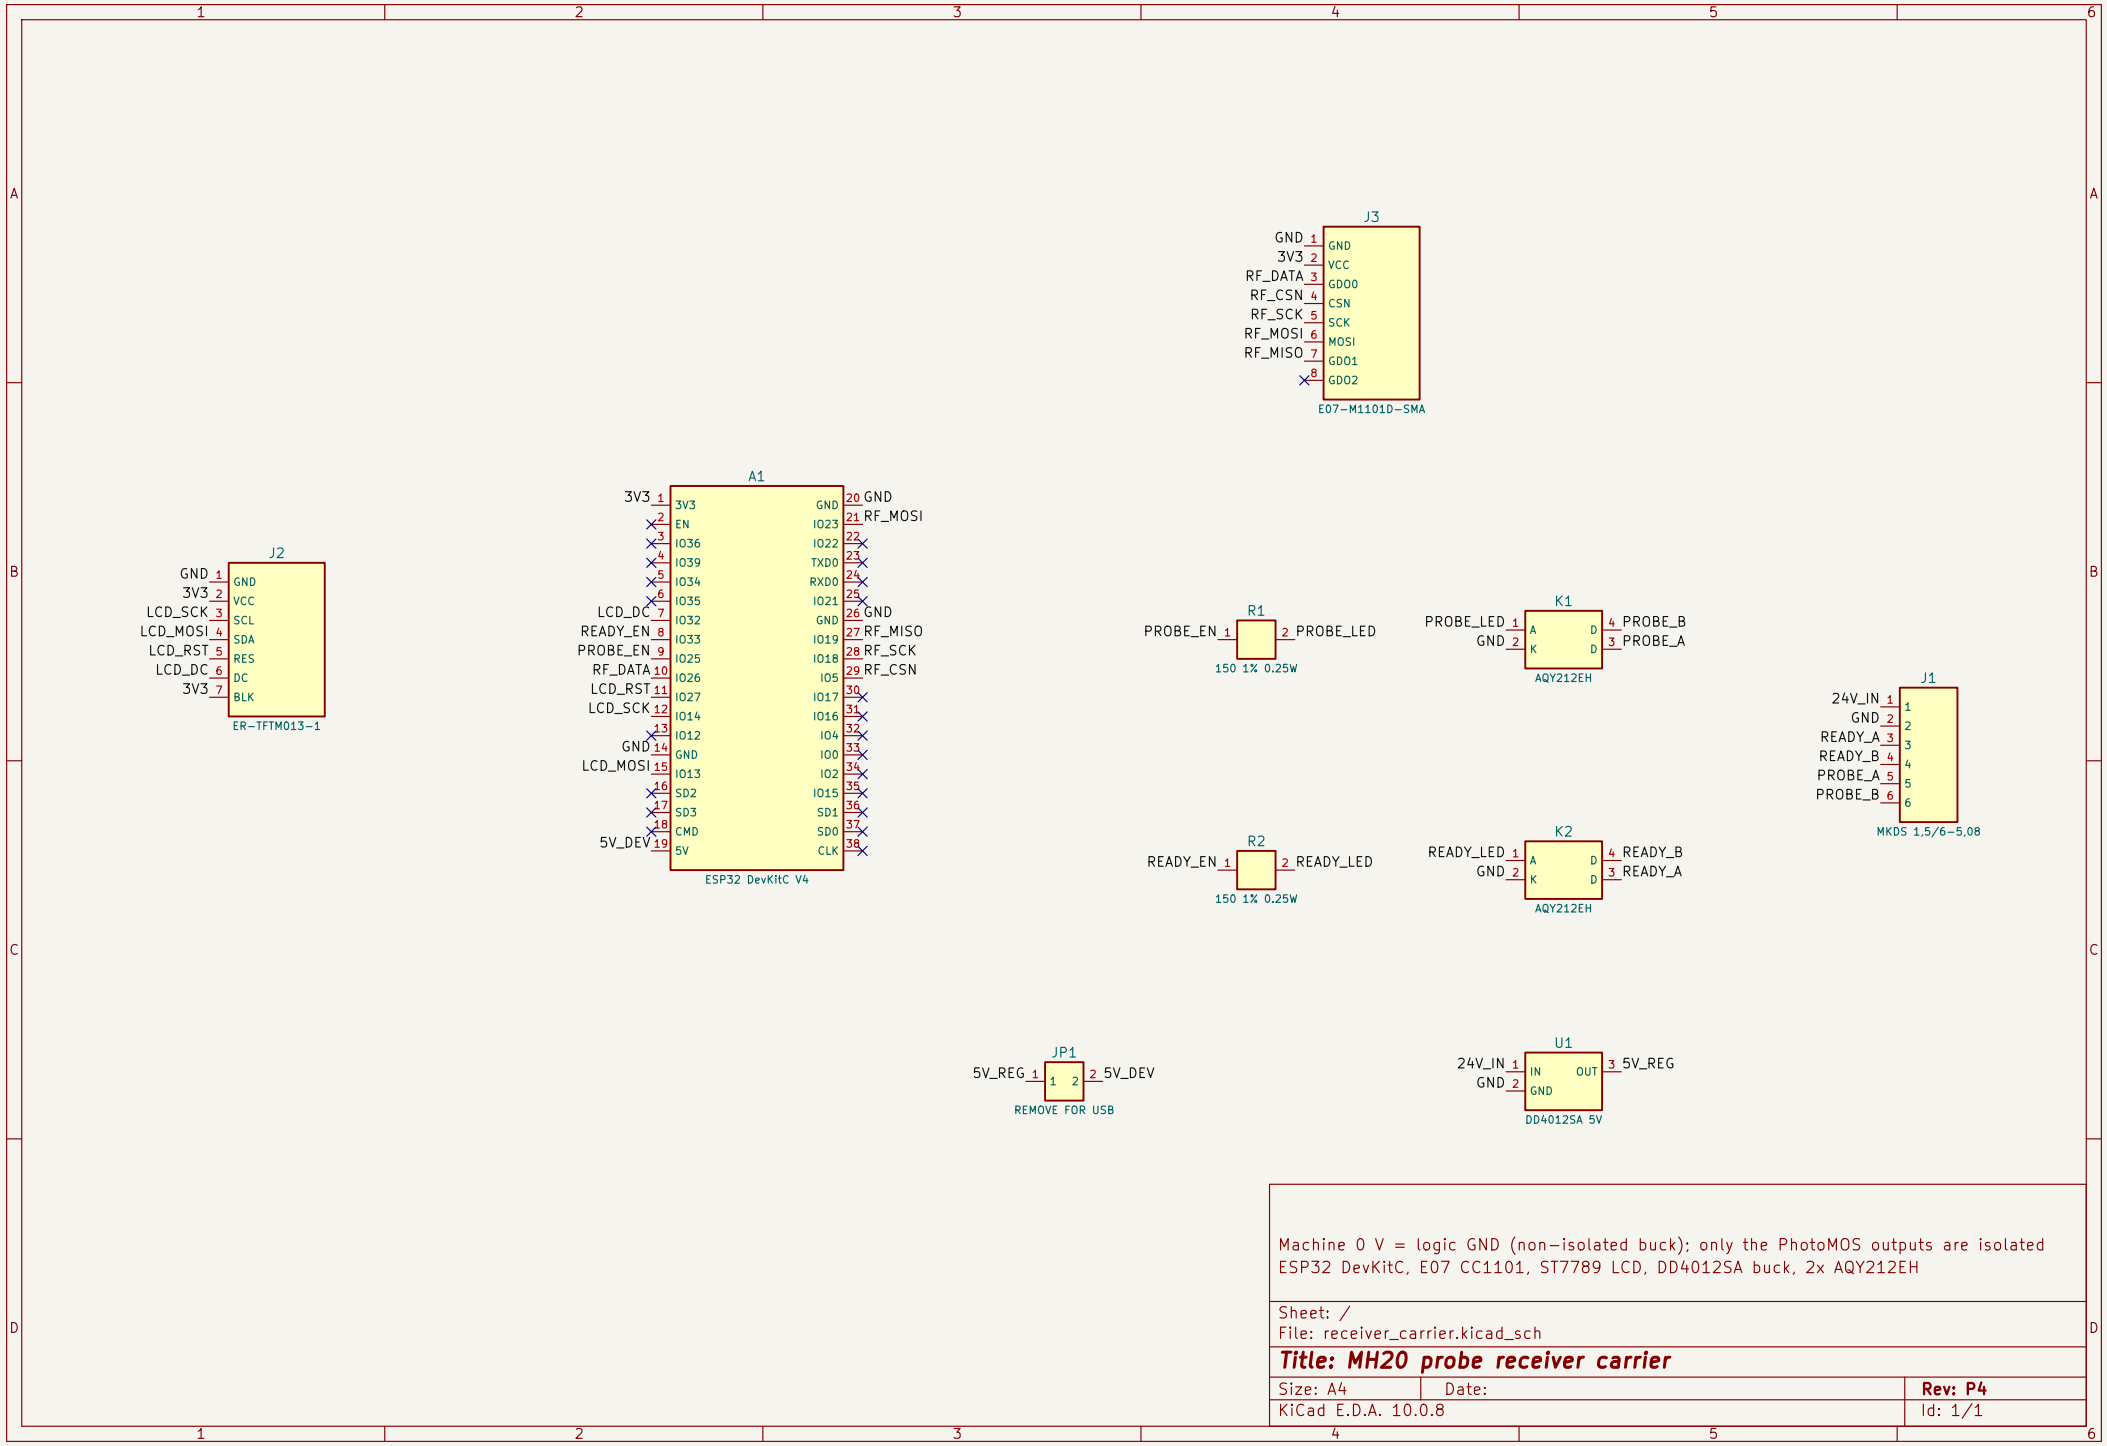

J2
GND 1
3V3 2
LCD_SCK 3
LCD_MOSI 4
LCD_RST 5
LCD_DC 6
3V3 7
GND
VCC
SCL
SDA
RES
DC
BLK
ER-TFTM013-1
A1
3V3 1
2
3
4
5
6
LCD_DC 7
READY_EN 8
PROBE_EN 9
RF_DATA 10
LCD_RST 11
LCD_SCK 12
13
GND 14
LCD_MOSI 15
16
17
18
5V_DEV 19
3V3
EN
IO36
IO39
IO34
IO35
IO32
IO33
IO25
IO26
IO27
IO14
IO12
GND
IO13
SD2
SD3
CMD
5V
GND 20
RF_MOSI 21
22
23
24
25
GND 26
RF_MISO 27
RF_SCK 28
RF_CSN 29
30
31
32
33
34
35
36
37
38
GND
IO23
IO22
TXD0
RXD0
IO21
GND
IO19
IO18
IO5
IO17
IO16
IO4
IO0
IO2
IO15
SD1
SD0
CLK
ESP32 DevKitC V4
J3
GND 1
3V3 2
RF_DATA 3
RF_CSN 4
RF_SCK 5
RF_MOSI 6
RF_MISO 7
8
GND
VCC
GDO0
CSN
SCK
MOSI
GDO1
GDO2
E07-M1101D-SMA
R1
PROBE_EN 1
2 PROBE_LED
150 1% 0.25W
K1
PROBE_LED 1
GND 2
A
K
D
D
4 PROBE_B
3 PROBE_A
AQY212EH
J1
24V_IN 1
GND 2
READY_A 3
READY_B 4
PROBE_A 5
PROBE_B 6
1
2
3
4
5
6
MKDS 1,5/6-5,08
R2
READY_EN 1
2 READY_LED
150 1% 0.25W
K2
READY_LED 1
GND 2
A
K
D
D
4 READY_B
3 READY_A
AQY212EH
JP1
5V_REG 1
1
2
2 5V_DEV
REMOVE FOR USB
U1
24V_IN 1
GND 2
IN
GND
OUT
3 5V_REG
DD4012SA 5V
Machine 0 V = logic GND (non-isolated buck); only the PhotoMOS outputs are isolated
ESP32 DevKitC, E07 CC1101, ST7789 LCD, DD4012SA buck, 2x AQY212EH
Sheet: /
File: receiver_carrier.kicad_sch
Title: MH20 probe receiver carrier
Size: A4
Date:
Rev: P4
KiCad E.D.A. 10.0.8
Id: 1/1