


Level 1 Station v3 — C5 PHY prototype

The XIAO ESP32-C5's own Wi-Fi radio as the FPV receiver: sector direction finding on analog and digital video links, a software video check, no RX5808 and no sync separator. Bench build and verification guide.

Document	docs/Level1-Station-v3-C5PHY-Bench-Guide.html	Firmware	level1-c5phy/
Branch	level1	Date	2026-10-07
Status	Both variants build and link (CI and locally; Arduino core 3.3.12 / ESP-IDF 5.5.5; RAM 44 %, flash 29 %), host tests pass — nothing bench validated	Station	_____

SIGNAL CHAIN AT A GLANCE

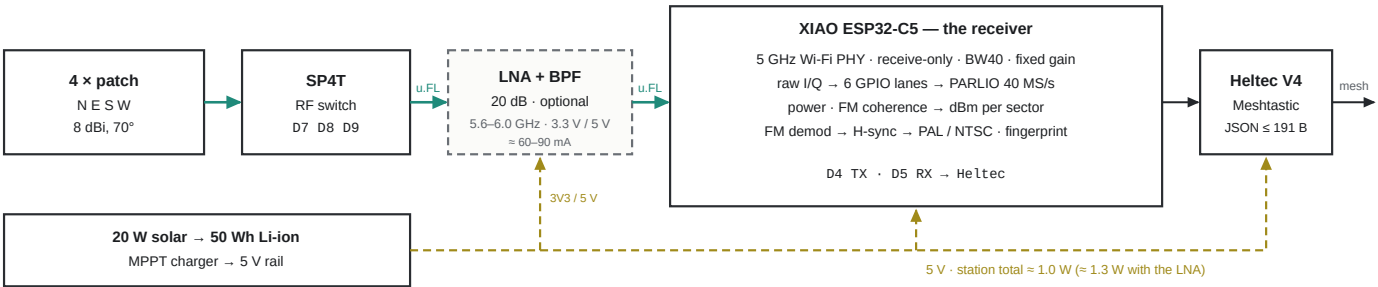


Simplified chain; the dashed LNA + band-pass stage is optional. The full block diagram with pin numbers, the I/Q path inside the C5 and the power tree is on sheet 2.

PARTS, AT A GLANCE

QTY	ITEM	KEY SPEC / PART	HAVE	≈ COST
1	XIAO ESP32-C5	receiver and MCU; only its U.FL antenna port is used	☐	\$10
4	Directional patch antenna	5.8 GHz, 7–9 dBi, SMA; gain entered in Station setup	☐	\$32
1	SP4T RF switch	SKY13322-375LF / PE42442	☐	\$3
4	u.FL–SMA pigtail	equal length , ≤ 15 cm	☐	\$8
4	SMA bulkhead feedthroughs	one per enclosure face	☐	\$8
1	u.FL–u.FL pigtail	switch common → XIAO, ≤ 5 cm	☐	\$2
1	LNA + band-pass filter (optional)	Optional 5.8 GHz, ~20 dB, 3.3/5 V; single-band stations only	☐	\$12
4	Dual-band patch antenna	Dual-band 2.4–2.5 + 5.6–5.95 GHz, 6–9 dBi, SMA; instead of the 5.8 GHz ones	☐	\$45
1	Wideband LNA, no filter	Dual-band 2.4–6 GHz, ~20 dB; instead of the filtered LNA	☐	\$15
1	Heltec WiFi LoRa 32 V4	Meshtastic, TEXTMSG 115200, RX 47 / TX 48	☐	\$20
1	Solar panel	20 W, 18 V nominal	☐	\$25
1	Charger / power manager	MPPT, 5 V out, ≥ 1.5 A	☐	\$15
4	18650 Li-ion	3500 mAh, 1S4P ≈ 50 Wh	☐	\$24
1	IP65 enclosure + brackets	≈200×150×100 mm, 10–15° wedge	☐	\$28
—	Passives	2 kΩ ×3, 100 nF ×2, 1000 µF	☐	\$2
—	5.8 GHz VTX + camera (bench only)	NTSC and PAL cameras; a step attenuator	☐	—
0	Not needed any more	RX5808, LMH1980/LM1881 sync separator, video coupling parts, RX5808 pigtail	—	–\$13

Before you start: nothing in this station has run on hardware yet. The receiver is the C5's Wi-Fi PHY driven through undocumented calls that the C5VRX project proved on ESP-IDF 6.0; this firmware re-implements them on the fleet's Arduino/ESP-IDF 5.5 toolchain. The procedure on sheets 6–9 is ordered so that each stage proves the next one is worth doing: receiver alive, channel coverage, selectivity, video (NTSC then PAL), sensitivity against an RX5808 station, the switch and the pattern, and last whatever digital video kit you have. Two build variants, one firmware: single-band (5.8 GHz patches, optional filtered LNA) and dual-band (dual-band patches, G1–G5 at 2.4 GHz added to the sweep); the sheets mark what the dual-band build adds. Two rules that are easy to break: the six I/Q lane pads (D0, D1, D2, D3, D6, D10) must stay unconnected, and every flash starts with a full erase. Full BOM on sheet 5.

1 · Full block diagram

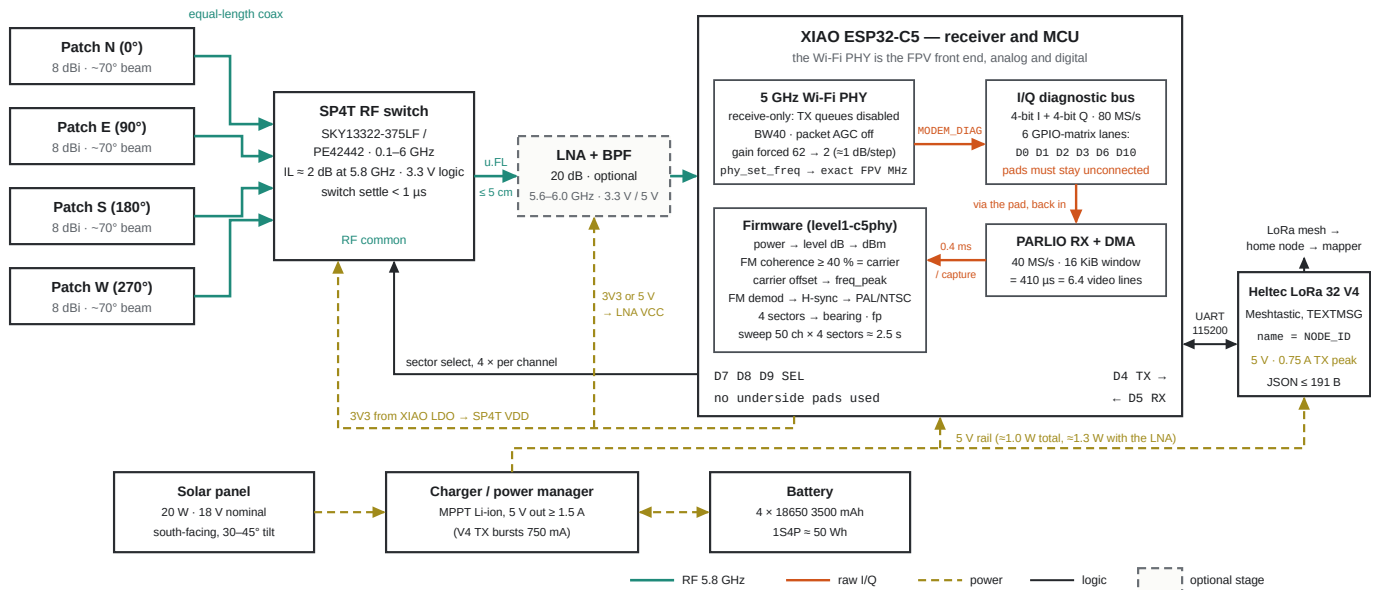


Four patches feed an SP4T switch whose common port goes into the XIAO's U.FL antenna connector, directly or through the optional 20 dB LNA + band-pass module. Inside the C5 the Wi-Fi PHY is held receive-only on the FPV frequency; its raw I/Q leaves on the modem's diagnostic bus, travels out through six top-side GPIO pads (bits 9–7 of I and Q) and back into the PARLIO peripheral, and the firmware measures power, FM coherence and horizontal sync on 16 KiB windows. The XIAO's 3V3 regulator feeds the switch (and the LNA, or the 5 V rail does); the 5 V rail feeds the XIAO and the Heltec. The LNA sits after the switch, so all four sectors share one gain: no per-sector gain mismatch, and the bearing constant K is unaffected.

WIRING LIST

FROM	TO	XIAO PIN	C5 GPIO	NOTES	✓
Switch V1	XIAO	D8	8	2 kΩ series	☐
Switch V2	XIAO	D9	9	2 kΩ series	☐
Switch V3	XIAO	D7	12	2 kΩ series; spare if the switch decodes 2 lines	☐
XIAO TX	Heltec V4 GPIO47 (Meshtastic RX)	D4	23	UART 115200 — the same pins as every station tier	☐
XIAO RX	Heltec V4 GPIO48 (Meshtastic TX)	D5	24	UART 115200	☐
Patches N/E/S/W	Switch RF1–4	—	—	equal-length coax ≤ 15 cm	☐
Switch common	XIAO U.FL	—	—	u.FL–u.FL ≤ 5 cm; the stock antenna comes off	☐
Switch common	LNA IN	—	—	Optional u.FL–u.FL or SMA pigtail ≤ 5 cm	☐
LNA OUT	XIAO U.FL	—	—	Optional ≤ 5 cm; replaces the direct switch → XIAO pigtail	☐
LNA VCC	3V3 or 5 V rail	—	—	Optional as the module requires; 100 nF + 10 μF at the module	☐
LNA GND	star point	—	—	Optional keep the module away from the Heltec's LoRa antenna	☐
I/Q lane pads Q7 Q8 Q9	nothing	D0 D1 D2	1 0 25	must float: no resistor, no probe, no PCB trace	☐
I/Q lane pads I7 I8 I9	nothing	D3 D10 D6	7 10 11	must float: same rule	☐
Underside pads	nothing	GPIO2–5	—	not used by this station: every pin is a top-side castellation	☐
5 V rail	XIAO 5V, Heltec 5V	—	—	1000 μF at the Heltec	☐
XIAO 3V3	Switch VDD	—	—	100 nF at the switch	☐
GND	all	—	—	single star point	☐

GPIO numbers are from the Arduino core's XIAO_ESP32C5 variant (config.h); wire by the D-labels. The I/Q lanes are GPIO 1, 0, 25 (Q7–Q9) and 7, 10, 11 (I7–I9): six of C5VRX's eight, the bit-6 lanes and the underside GPIO2–5 pads left out so the eleven top-side pins hold lanes, UART and switch; the firmware reads the missing bit as the midpoint (IQ_LANE_BITS). Each lane pad is driven and read back by the modem: any load on it corrupts the samples.

2 · Sector layout and receiver

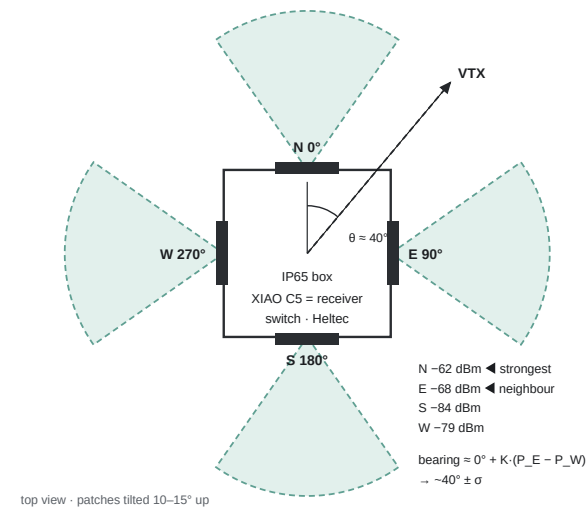

Top view. Each patch covers about 70°, so an emitter always sits inside one sector and near the edge of a neighbour. Unchanged from v2.

METHOD

Amplitude comparison. Take the strongest sector k and its two neighbours; with powers in dB the bearing is

$$\text{bearing} = \text{az}[k] + K \cdot (P[k+1] - P[k-1])$$

K (°/dB) is derived from the antenna gain entered at flash time (8 dBi → 72° beam → 2.97 °/dB, bearing_k in the boot line) and anchored by the stage 6 sweep. Report bearing_deg and bearing_sigma_deg; sigma grows on a sector boundary (strongest within 3 dB of a neighbour), on a weak peak, and when a neighbour's capture failed (sector axis, wide sigma).

PER-CHANNEL SCAN LOOP

```
rf_tune(channel); delay(8 ms)
for sector in N,E,S,W:
    select(sector); wait 200 μs; gain = 62
    for w in 1..3 (1 on a quiet channel):
        capture 16 KiB @ 40 MS/s      (0.4 ms)
        metrics                        (~2 ms)
        if clip > 3 %: gain -= 3; retake
        level = min(windows); q, cv2 = median
    hit: best sector level >= 8 dB, q >= 40 %, cv2 <= 0.5
```

Sweep ≈ 50 channels × ~50 ms ≈ 2.5 s (55 dual-band ≈ 2.8 s) plus ≤ 0.5 s of confirmation passes. The gain steps keep strong carriers unclipped and weak ones at full gain; the minimum over windows drops Wi-Fi bursts.

HOW THE C5 BECOMES THE RECEIVER

STEP	WHAT HAPPENS	WHERE
Bring-up	Wi-Fi driver in station mode, power management off; 5 GHz only (both bands when dual-band), no power save, BW40; promiscuous with an empty filter; the five MAC transmit queues hardware-disabled; packet AGC off; PLL-tracking timer stopped. The radio cannot transmit.	c5phy_rf.cpp rf_start
Tune	Park on the nearest public 5 GHz centre the regulatory table accepts (esp_wifi_set_channel), then phy_set_freq to the exact FPV MHz; re-arm the diagnostic stream, re-assert AGC-off / BW40 / gain. Band A is exactly Wi-Fi ch 149–173.	c5phy_rf.cpp rf_tune
Capture	PARLIO reads the 6 lanes (bits 9–7 of Q and I) at 40 MS/s (every second modem sample) into one 16 KiB DMA window: 410 μs, one byte per sample, I high nibble, Q low nibble, the unwired bit-6 lanes read as the midpoint.	iq_capture.cpp iq_capture_window
Measure	Mean power; share of samples with power ≥ 8 whose phase step is within ±45° of the previous one (q_phase; an offset of ≤ 5 MHz); clipping; mean phase step → carrier offset; envelope variance / mean² (cv2); phase-step variance (video swing or bare CW).	demod.c iq_metrics
Level	level_db = (62 - gain) × 1 dB + 10 · log10(p_mean / 2.0); 2.0 is the noise power at gain 62 (C5VRX measurement). rssi_dbm = -95 + level_db until calibrated on sheet 7.	main.cpp measure_sector
Hit	Level ≥ 8 dB and coherence ≥ 40 % and cv2 ≤ 0.5 on the strongest sector. Coherence is the selectivity: a carrier 10 MHz off steps 90° per sample and never counts, so a neighbour inside the 40 MHz filter is not a hit. cv2 keeps OFDM (≈ 1) out; FM video reads 0.02–0.3.	main.cpp scan_freq
Video	On the strongest due peaks after the sweep: FM-demodulate 8 windows and look for horizontal sync repeating at the PAL or NTSC line period. Sheet 4.	demod.c video_window main.cpp video_check
Digital	Not a hit but continuous and noise-like (cv2 0.5–1.5, window spread ≤ 6 dB): after the sweep, 8 windows on the strongest sector; lag autocorrelations class it lte / dot11 / wb, r1 gives the bandwidth bucket, the centroid the centre; duty ≥ 75 % → "type": "wideband" with a bearing. Sheet 9.	demod.c iq_lag_* main.cpp wideband_check

demod.c, bearing.c and report.c are plain C, unit-tested on a desktop with synthetic 4-bit I/Q (test/host, make).

3 · Video check and serial output

VIDEO CHECK

On the strongest due peaks after the sweep: hold the channel and the sector, demodulate 8 windows 5 ms apart (phase step between samples = instantaneous frequency), find sync-tip pulses 3.2–7.2 μs wide below a threshold set from the window's own percentiles, and measure the spacing of consecutive pulses.

LINE PERIOD	LINE RATE	VERDICT	MEANING
64.0 μs (2560 samples)	15 625 Hz	PAL	real analog video carrier
63.56 μs (2542 samples)	15 734 Hz	NTSC	real analog video carrier
sync-shaped pulses, no repeating period	—	none	not video-shaped: noise, Wi-Fi, an unmodulated carrier
swing under 4 units/sample	—	none	no FM deviation on this channel

A window counts with ≥ 2 consecutive periods and a sync score ≥ 70 (width closeness 0–40 + period closeness 0–60); the carrier is video when ≥ 3 of 8 windows count. sync_q is the share of windows that counted. The **field rate is not measured** (a 410 μs window never sees a vertical interval): field_hz is the nominal 50/60 of the detected standard. The fingerprint fp is <video>/<sync_hz>/<freq_peak>, e.g. NTSC/15736/5734, where freq_peak is the tuned frequency plus the measured carrier offset — no synthesizer sweep needed.

EXPECTED SERIAL OUTPUT

Boot line on USB at 115200. "rf":true is the PHY receive-only and the PARLIO reader running; false is followed by an {"info":"error",...} line naming the failed call. The bench console (? status, h R3 / h 5732 / h D1 hold, s 0–3 sector, g 30 / g a gain, v video check, w wideband check, t 100 drive the switch lines while holding, b 0|1 analog filter BW20/BW40, x resume) prints {"info":"bench",...} lines with level_db, rssi_dbm, gain, p_mean, q_phase, cv2, clip, cfo_khz, mod, noise, step_std, nf_dbm.

```
{
  "info": "c5phy v3 station ready",
  "node_id": "A1B2",
  "receiver": "c5phy",
  "hw": "v3",
  "channels": 50,
  "sectors": 4,
  "heading": 0,
  "fe_gain_db": 0.0,
  "threshold_dbm": -87.0,
  "threshold_level_db": 8.0,
  "q_min": 40,
  "peak_pick": 1,
  "video": 1,
  "bw40": 1,
  "gain_max": 62,
  "window_us": 409,
  "iq_lane_bits": 3,
  "bands": "5.8",
  "antenna_dbi": 8.0,
  "beamwidth_deg": 72,
  "bearing_k": 2.97,
  "wideband": 1,
  "pullin": 1,
  "gain_step": 3,
  "mesh_uart": "D4 TX / D5 RX 115200",
  "phy_set_freq": true,
  "rf": true
}
```

Detection line on USB, one per hit per sweep — the v2 contract with receiver/hw changed and diagnostics added:

```
{
  "type": "analog_fm",
  "receiver": "c5phy",
  "hw": "v3",
  "mac": "AF:00:52:03:16:64",
  "freq_mhz": 5732,
  "band": "R",
  "ch": 3,
  "rssi": -68,
  "rssi_dbm": -68.1,
  "rssi_raw": 536,
  "rssi_min": -70,
  "rssi_max": -66,
  "rssi_n": 3,
  "level_db": 26.9,
  "gain": 50,
  "q_phase": 71,
  "cfo_khz": 1840,
  "carrier": "fm",
  "sectors": [-68.1, -74.4, -91.0, -85.2],
  "sector": 0,
  "bearing_deg": 32,
  "bearing_sigma_deg": 15,
  "station_heading": 0,
  "freq_peak": 5734,
  "video": "NTSC",
  "sync_hz": 15736,
  "field_hz": 60,
  "sync_q": 88,
  "sync_score": 91,
  "video_windows": 8,
  "fp": "NTSC/15736/5734",
  "basic_id": "5.8G-R3-5732MHz",
  "node_id": "RX01",
  "seq": 42
}
```

The mesh copy (Serial1 to the Heltec, ≤ 191 bytes, at most one per emitter per MESH_REPORT_INTERVAL_MS):

```
{
  "type": "analog_fm",
  "mac": "AF:00:52:03:16:64",
  "node_id": "RX01",
  "freq_mhz": 5732,
  "band": "R",
  "ch": 3,
  "rssi": -68,
  "bearing_deg": 32,
  "bearing_sigma_deg": 15,
  "video": "NTSC",
  "fp": "NTSC/15736/5734"
}
```

Heartbeat every 60 s on USB, 120 s on the mesh:

```
{
  "heartbeat": true,
  "node_id": "RX01",
  "receiver": "c5phy",
  "hw": "v3",
  "scanning": true,
  "channels": 50,
  "sectors": 4,
  "heading": 0,
  "threshold_dbm": -87.0,
  "threshold_level_db": 8.0,
  "video_seen": 7,
  "gain_max": 62,
  "bw40": 1,
  "fe_gain_db": 0.0,
  "bands": "5.8",
  "antenna_dbi": 8.0,
  "beamwidth_deg": 72,
  "bearing_k": 2.97,
  "wb_seen": 2,
  "pullin": 3,
  "tune_fail": 0,
  "cap_err": 0,
  "bus_stuck": 0,
  "alias_drop": 0,
  "sweeps": 1830,
  "usb_drop": 0,
  "mesh_drop": 0,
  "nf_dbm": -98,
  "temp_c": 41.2,
  "uptime_s": 3600,
  "seq": 42
}
```

A digital video link is reported as "type": "wideband" under a DF: key, with cls (lte / dot11 / wb), conf, bw_mhz, fc_mhz, duty, the lag features and the same bearing fields; the full USB and mesh lines are in level1-c5phy/README.md, the bench procedure on sheet 9.

rssi is dBm like every other station tier; rssi_raw is the 10-bit RX5808-style value of the v2 contract. bearing_deg is relative to the box's face N — the mapper rotates it by the station heading set in its LEVEL 1 STATIONS panel, where each station's position is also set; two stations' crossing bearings give a position fix with an error radius. A station registers itself in the mapper from its first heartbeat. tune_fail counts channels the regulatory table refused, cap_err failed I/Q captures, nf_dbm the station's own noise-floor estimate from the quietest sector of the last sweep (nf_dbm_24 for the 2.4 GHz plan on a dual-band build), wb_seen the digital-link reports, pullin the retunes onto off-channel analog carriers.

4 · Full bill of materials

Single-unit planning prices, quantities per station. Total ≈ \$177 all-in, ≈ \$189 with the optional LNA; ≈ \$84 / \$96 electronics only (v2: ≈ \$190 / \$95).

RF FRONT END

#	PART	QTY	NOTES	✓	≈ \$
1	Seeed XIAO ESP32-C5	1	Receiver and MCU; only its U.FL port carries RF, the stock antenna is not used.	☐	10
2	Directional patch, 5.8 GHz, 7–9 dBi, SMA	4	Enter its gain in Station setup (K derives from it). Linear is polarisation-agnostic (−3 dB vs RHCP); RHCP +3 dB common case, −20 dB on LHCP. One batch, never mixed.	☐	32
	Dual-band patch, 6–9 dBi, SMA	4	2.4–2.5 + 5.6–5.95 GHz; replaces row 2 when dual-band; both gains entered.	☐	45
3	SP4T RF switch, 0.1–6 GHz, 3.3 V control	1	PE42442 (2/3-line decoded, drives directly) or SKY13322-375LF (4-line one-hot: needs a 3-input NOR for V4, see the README): ~2 dB loss at 5.8 GHz, sub-μs. Check control lines and truth table; eval board first (~\$40).	☐	3
4	u.FL–SMA pigtails, equal length ≤ 15 cm	4	Matched length keeps sector losses matched — the bearing depends on it.	☐	8
5	u.FL–u.FL pigtail ≤ 5 cm	1	Switch common port to the XIAO's U.FL. Shortest run. Two with the LNA (switch → LNA IN, LNA OUT → XIAO).	☐	2
6	SMA bulkhead feedthroughs	4	One per enclosure face.	☐	8
7	Optional 5.8 GHz LNA + band-pass filter, ~20 dB; single-band only	1	~5.6–6.0 GHz passband, SMA or u.FL, 3.3 V or 5 V per module, ≈ 60–90 mA; between the switch common port and the XIAO's U.FL. Fit it when the stage 5 floor is worse than the v2 RX5808 station's or range is short; its filter also protects the front end from a nearby 5 GHz AP (the PHY's own filter is 40 MHz wide).	☐	12
	Wideband LNA, no filter	1	2.4–6 GHz, ~20 dB; replaces row 7 on a dual-band station; also hears every 2.4 GHz AP in view.	☐	15

MCU, MESH, POWER, MECHANICAL

#	PART	QTY	NOTES	✓	≈ \$
8	Heltec WiFi LoRa 32 V4 + antenna	1	Meshtastic, TEXTMSG 115200, serial RX 47 / TX 48, node name = NODE_ID; D4/D5 as on every tier. Standard OLED model (the TFT model uses GPIO47/48). Fit the antenna before powering: it transmits at up to 28 dBm.	☐	20
9	Solar panel 20 W, 18 V	1	South-facing, 30–45° tilt. 10 W covers summer only.	☐	25
10	MPPT charger, 5 V out, ≥ 1.5 A	1	Must carry the Heltec V4's 750 mA transmit bursts on top of the ~0.2 A the rest of the station draws; a 1 A output is marginal.	☐	15
11	18650 Li-ion 3500 mAh, 1S4P holder	4	≈ 50 Wh. Protected cells or a BMS board.	☐	24
12	1000 μF low-ESR cap at the Heltec	1	LoRa TX bursts.	☐	1
13	IP65 enclosure ≈ 200×150×100 mm	1	Patches on the four vertical faces at 0/90/180/270°, tilted 10–15° up.	☐	15
14	Cable gland, desiccant	1		☐	3
15	Pole bracket + four patch wedges	1 set	Face N to true north and record the heading; a mis-oriented box rotates every bearing.	☐	10
16	2 kΩ ×3, 100 nF ×2	—	Switch control series resistors and supply decoupling (+ 100 nF and 10 μF at the LNA if fitted).	☐	1

REMOVED FROM THE V2 STATION

V2 PART	REPLACED BY
RX5808 receiver, SPI-modded	The C5's Wi-Fi PHY: public-centre bootstrap + phy_set_freq for tuning; raw I/Q power at a fixed gain for RSSI.
LMH1980 / LM1881 sync separator, 0.1 μF, 75 Ω	Software: FM discriminator on the same I/Q, H-sync search, PAL/NTSC from the line period.
RX5808 pigtail, 10 μF, SPI and sync wiring	Nothing. D0/D10 become I/Q lanes, D7/D8/D9 carry the switch.

Carrier PCB rules. XIAO C5 footprint with D0, D1, D2, D3, D6, D10 **unrouted** (no test points; the underside GPIO2–5 pads are not used); SP4T with four u.FL launches and a u.FL to the XIAO (or a u.FL pair bridging the optional LNA); control lines on D7/D8/D9 via 2 kΩ; UART header on D4/D5; decoupling. Nothing else. Make it after stage 6.

5 · Bench procedure — is the receiver alive?

Work top to bottom on a bare XIAO with the stock antenna on the U.FL; the switch and patches come in stage 6. Do not move to the next stage until the current one gives the stated result. Console commands are typed into the serial monitor, Enter-terminated; the list is on sheet 4 and each stage names the ones it uses.

STAGE 0 — FLASH AND BOOT

- ☐ `pio run -e seeed_xiao_esp32c5 --target erase`, then `--target upload`. A **full erase precedes every flash**: stale PHY calibration data left C5VRX's receiver deaf after reflashes. Boot mode if it will not connect: hold BOOT, tap RESET, release BOOT.
- ☐ Monitor at 115200. **Expected:** `{"info":"c5phy v3 station ready",...,"rf":true}`. If `"rf":false`, copy the `{"info":"error"}` line here: _____
- ☐ ? twice, 60 s apart. **Expected:** captures climbing (hundreds per second while scanning), `cap_err` 0. Measured: captures/min _____ `cap_err` _____

STAGE 1 — RECEIVER ALIVE

- ☐ No VTX on. h A1. **Expected:** `level_db` 0 ± 2 , `p_mean` ≈ 2 , `q_phase` under 15, `gain` 62, `clip` 0, `noise` 1, `stuck` 0 (a dead I/Q bus reads `stuck` 1 with `bus_stuck` climbing; all-zero it also reads `p_mean` 2.0, so trust the flag). Measured: `level_db` _____ `p_mean` _____ `q_phase` _____
- ☐ Note the station's own no-signal noise floor: `nf_dbm` _____ dBm. `p_mean` far from 2 means `RF_NOISE_POWER` is not this board's value — write it down for the calibration. `cv2` on noise: _____ (≈ 1).
- ☐ Key a VTX on A1 (5865 MHz) a few metres away. **Expected:** `level_db` up by ≥ 30 dB, `gain` stepping below 62, `q_phase` ≥ 50 , `cv2` ≤ 0.3 (gate limit 0.5), `mod` 1, `noise` 0, `cfo_khz` within ± 2000 . Measured: `level_db` _____ `gain` _____ `q_phase` _____ `cv2` _____ `cfo` _____
- ☐ Move the VTX away or unkey it. **Expected:** back to the no-signal values on the next line. `level_db` up without `q_phase`: an off-channel carrier (check `cfo_khz`) or scrambled lanes; with `cv2` ≈ 1 a digital signal or Wi-Fi (sheet 9).
- ☐ {Dual-band} h G3: the A1 values with no signal, ? shows band 2; a phone hotspot raises the level. `level_db` _____ `stuck` _____

STAGE 2 — CHANNEL COVERAGE

- ☐ x to resume scanning; wait for a heartbeat (60 s). **Expected:** `tune_fail` 0, channels 50 (55 dual-band). Measured: `tune_fail` _____
- ☐ If not 0: h each band's channels and note the ones refused (`"err":"tune failed: esp_wifi_set_channel (regulatory table) (...)"`; L1–L3 on a LOWBAND 2 build fail with no public centre within `C5PHY_MAX_BOOTSTRAP_OFFSET_MHZ` instead, which no country table fixes): _____. Set `RF_COUNTRY_CC` to the deployment country, reflash (erase first), repeat. Value used: _____
- ☐ h E4 (5645, lowest) and h E8 (5945, highest). **Expected:** both hold; ? shows the bootstrap `wifi_ch` 128 and 177. E8 is 60 MHz above the last public centre: if a VTX on E8 is not heard there but a VTX on E5 (5885) is heard on E5, E7 and E8 alike, the synthesizer does not follow `phy_set_freq` that far — build with `-DC5PHY_MAX_MHZ=5885` (46 channels) and note it here. Measured: _____ / _____
- ☐ h D1, h L4; dual-band h G1, h G5. **Expected:** all hold; `wifi_ch` 36 / 100 (G 1 / 13). No VTX on these Wi-Fi bands in most countries; an AP on Wi-Fi 36 (5180 MHz) is D1's test signal. Refused: _____ $\rightarrow$ `-DSCAN_5G1=0` / `-DLOWBAND=0`.

STAGE 3 — SELECTIVITY

- ☐ VTX on R3 (5732), scanning. **Expected:** a detection line for R3 within two sweeps; B1 (5733) and F1 (5740) may hit too and `PEAK_PICK` folds them into one. Channels reported: _____
- ☐ **Expected:** no hit on any channel more than 40 MHz away. If one appears, h it and note `q_phase` _____ (a hit needs ≥ 40) and `cfo_khz` _____.
- ☐ h R3, VTX on: `cfo_khz` _____ $\rightarrow$ `freq_peak` _____ MHz in the detection line. **Expected:** stable, the VTX's real offset.
- ☐ Hold the channel nearest a live 5 GHz access point (band A = Wi-Fi 149–173). **Expected:** raised `level_db`, `q_phase` under 40, `cv2` above 1.5: no hit of either kind. Under a long file copy a wideband dot11 report with `duty` ≥ 90 is correct. `cv2` _____ loaded: `cls` _____ `duty` _____

6 · Bench procedure — video and sensitivity

STAGE 4 — VIDEO CHECK

- ☐ VTX with an **NTSC** camera, hold its channel, v. **Expected:** ≥ 3 of 8 windows video:1, std:NTSC, line_hz 15734 $\pm$ 10, present:1. Measured: _____ / 8 windows, line_hz _____
- ☐ Same with a **PAL** camera. **Expected:** std:PAL, line_hz 15625 $\pm$ 10. Measured: _____ / 8, line_hz _____. **PAL is unproven on this receiver:** if it fails, record every window's swing, pulses, periods and period.
- ☐ VTX keyed with the camera unplugged. **Expected:** present:0; while scanning the detection line carries "video":"none" and carrier cw or fm.
- ☐ Back to scanning with the camera on. **Expected:** the detection line shows video, sync_hz and fp. Copy fp here: _____

STAGE 5 — SENSITIVITY AND DBM CALIBRATION

- ☐ VTX through a step attenuator (or a power meter on its output) into the U.FL; hold the channel and fill the level record below at each input level.
- ☐ **Expected:** level_db falls 1 dB per dB of attenuation over ~60 dB, gain rising back to 62 as the signal weakens, until the curve flattens at the floor; q_phase ≥ 40 and cv2 ≤ 0.5 all the way down to the threshold. Measured slope: _____ dB/dB floor: _____ dBm
- ☐ Same VTX, same attenuator, on a v2 RX5808 station: floor _____ dBm. Difference v3 – v2: _____ dB. **This number decides whether v3 replaces v2 or supplements it.**
- ☐ Optional With the LNA fitted: repeat the attenuator sweep. Floor improvement v3+LNA – v3: _____ dB (expect 3–8 dB where the C5's own noise figure dominated); clipping onset at _____ dBm input; RF_NOISE_POWER measured: _____
- ☐ Solve the two-point line and enter RSSI_CAL_DBM_AT_NOISE _____, RSSI_CAL_SLOPE _____, RSSI_CAL_OFFSET_DB (per station, antenna + cable) _____; reflash. Heartbeat threshold_dbm now reads _____ (expect –85 to –90).
- ☐ Quiet band, 60 s of h A1: highest level_db seen _____ → set DETECT_LEVEL_DB at least 6 dB above it: _____

LEVEL CALIBRATION RECORD

Known level into the U.FL on a held channel. The slope should be 1 dB/dB; the two-point line sets RSSI_CAL_DBM_AT_NOISE and RSSI_CAL_SLOPE in config.h. Where the firmware has stepped the gain down, level_db already includes the (62 – gain) term. Dual-band: the same sweep on a G channel sets the _24 set.

INPUT LEVEL (DBM)	–90	–80	–70	–60	–50	–40	–30
Measured level_db							
gain the firmware settled on							
q_phase (%)							
cv2							
Hit while scanning? (y/n)							

No transmitter: level_db _____ p_mean _____ nf_dbm _____. VTX used: _____ power / attenuator: _____ LNA fitted (y/n): _____

Reading the numbers. level_db is dB above the noise reference (mean I^2+Q^2 of 2.0 at gain 62); rssi_dbm = RSSI_CAL_DBM_AT_NOISE + level_db $\times$ RSSI_CAL_SLOPE + RSSI_CAL_OFFSET_DB – RF_FRONTEND_GAIN_DB. The default –95 dBm is KTB over ~20 MHz plus a ~6 dB noise figure, not a measurement. A slope far from 1 dB/dB, or a floor much worse than the RX5808's, is a real result — record it, do not tune the constants to hide it.

Optional **With the LNA fitted**, run this calibration with the LNA in the chain and leave RF_FRONTEND_GAIN_DB at 0; RF_FRONTEND_GAIN_DB = 20 only carries a calibration taken without the LNA over to a station that has one. Re-measure RF_NOISE_POWER (p_mean with no signal at gain 62): the LNA's output noise can exceed the C5's own floor. Expect the gain stepping (gain index 62 → lower) to engage ~20 dB earlier.

7 · Bench procedure — switch, pattern, field, power

STAGE 6 — RF SWITCH AND PATTERN

- ☐ Eval board powered from 3V3, one patch on RF1, common port → XIAO U.FL, control lines from D7/D8/D9 through 2 kΩ. Hold a channel with a VTX on, drive each combination (t 000, t 100, t 010, t 110; the pattern stays until s or x) and record which RF port goes through. **Write the truth table here** (the firmware's V1 is D8, V2 D9, V3 D7): V1V2V3 = 000 → RF__ 100 → RF__ 010 → RF__ 110 → RF__ → SECTOR_SWITCH_TABLE
- ☐ VTX on, hold its channel, s 0 ... s 3. **Expected:** level_db follows the sector the patch is on and settles within one line. Insertion loss against the patch wired direct to the U.FL: _____ dB (expect ≈ 2); measured with the LNA in the path if fitted: _____ dB (expect ≈ -18, a net gain)
- ☐ Mount all four patches on the box, VTX at 30 m on a known bearing, clear line of sight. Rotate the box in 15° steps through a full turn, logging all four sectors values at each step.
- ☐ Derive K (°/dB) from the neighbour difference: _____; the boot line's derived bearing_k: _____ (2.97 at 8 dBi). Record the measured K as custom_bearing_k and BEARING_K_SCALE = 2.5 × measured / derived: _____. Save the sweep to docs/.

STAGE 7 — FIELD ACCEPTANCE

- ☐ Two v3 stations 300–500 m apart, both positions and face-N headings set in the mapper's LEVEL 1 STATIONS panel, both named to match their Meshtastic nodes, D4/D5 wired to the Heltecs.
- ☐ Walk a VTX between them on ten marked points. **Pass:** the 90 % circle contains the true position on at least 9 of 10. Score: _____ / 10
- ☐ **Pass:** video reads NTSC or PAL on every report for a live camera, never none; the mesh copy arrives with fp.
- ☐ Leave both stations on solar for 72 h. **Pass:** no brownout, heartbeat gap never exceeds 5 min. Measured station current at 5 V: _____ mA (expect ≈ 200–240; ≈ 270–320 with the LNA, and peaks near 0.9 A while the Heltec transmits)

POWER BUDGET

LOAD	CURRENT	POWER	NOTES
XIAO ESP32-C5, Wi-Fi PHY receiving continuously, 240 MHz	~120 mA @ 3.3 V	~0.45 W	via the 5 V rail and on-board LDO. The radio never sleeps and never transmits; PARLIO/DMA add little. Datasheet estimate — the stage 7 current measurement replaces it
SP4T switch	< 5 mA	0.02 W	the entire DF add-on
Optional LNA + filter (optional)	60–90 mA @ 3.3/5 V	≈ 0.3 W	fit only if stage 5 shows it pays
Heltec V4, Meshtastic, mostly RX	75 mA RX, ~110 mA avg @ 5 V	≈ 0.55 W	750 mA (3.75 W) while transmitting at 27 dBm (Heltec V4 datasheet); the average assumes 5 % airtime
Station total		≈ 0.9–1.1 W, ≈ 1.2–1.4 W with the LNA	≈ 22–34 Wh/day; peak ≈ 0.9 A at 5 V (≈ 1.0 A with the LNA) while the V4 transmits, so the 5 V output needs ≥ 1.5 A. The v2 solar sizing (20 W panel, 50 Wh battery, ~36 h of darkness at 1.4 W) still carries it, with less margin; a 10 W panel is then summer-only. The RX5808's 0.6 W is gone and the radio's ~0.4 W takes its place

RECORD

Built by		Date	
Verified by		Date	
Station ID		True-north heading of face N	
Firmware commit		Platform / libphy checked	

8 · Bench procedure — digital video links

Per kit you have: an OpenIPC / wfb-ng link, HDZero, DJI O4 with its goggles, Walksnail Avatar — a running link a few metres from the box on a channel the kit shows. The station must keep it out of the analog gate, confirm it as "type": "wideband" and class it; the mapper (level2-main or standalone, both carry the classification table) must name the system. Nothing here has run on hardware: the thresholds come from a synthetic model of 802.11 and LTE-like waveforms, and HDZero and Walksnail have no model at all — for them the numbers are the result, not a pass mark. Build / gains entered: _____ / _____ / _____ dB

STAGE 8 — DIGITAL LINKS

- ☐ Kit on; h the table channel nearest its centre (*ch held* below), s the sector facing it. **Expected:** level_db well above 8 dB, q_phase under 40 (near 40 on a DJI link), cv2 0.5–1.5: the analog gate rejects it, the candidate rule takes it. Measured: level_db _____ q_phase _____ cv2 _____
- ☐ w three times (the 8-window pass plus a lag scan 40–3200 of the last window, about 2 s each). **Expected:** duty ≥ 75, a cls that fits the kit, bw_mhz and fc_mhz matching its setting, the same answer on every press (scan_lag may miss 2665–2669 on one DJI press in five). Fill the kit's block.
- ☐ x with the mapper open. **Expected:** one wideband line per sweep under a DF: key, no analog_fm line for the channel, wb_seen climbing in ?; the mapper's IDENTIFICATION panel names the system with a confidence (system, system_conf). Record the label.
- ☐ Kit at 30 m on a known bearing, the box rotated 0°, 15°, 30°, 45° off the sector axis as in stage 6. **Pass:** |true – bearing_deg| ≤ bearing_sigma_deg at every step (≈ 15° at duty 100, 20° at duty 75: one window per sector, interleaved N E S W W S E N). The neighbour-difference slope against the angle is the digital K; the firmware uses one K per band for analog and digital alike, so a K unlike stage 6's is a finding to report, not a constant to enter.

RECORD — ONE BLOCK PER KIT

OPENIPC	CH HELD	CLS	CONF	BW_MHZ	FC_MHZ	DUTY	R128	R2667	SCAN_LAG	SYSTEM
expected	A7...A1	dot11	high	20 (40)	centre	≥ 90	≥ 0.10	~0.01	128	802.11 video link
measured										
bearing	0°: _____ 15°: _____ 30°: _____ 45°: _____ σ: _____ digital K: _____ %dB kit set: _____									

HDZERO	CH HELD	CLS	CONF	BW_MHZ	FC_MHZ	DUTY	R128	R2667	SCAN_LAG	SYSTEM
expected	R1–R8	any	med/low	30 / 20	centre	≥ 75	record	record	record	HDZero
measured										
bearing	0°: _____ 15°: _____ 30°: _____ 45°: _____ σ: _____ digital K: _____ %dB kit set: _____									

DJI O4	CH HELD	CLS	CONF	BW_MHZ	FC_MHZ	DUTY	R128	R2667	SCAN_LAG	SYSTEM
expected	R4 · B4 · B5	lte	high	10/20/40	centre	≥ 75	< 0.05	≥ 0.03	2665–2669	DJI O4
measured										
bearing	0°: _____ 15°: _____ 30°: _____ 45°: _____ σ: _____ digital K: _____ %dB kit set: _____									

WALKSNAIL	CH HELD	CLS	CONF	BW_MHZ	FC_MHZ	DUTY	R128	R2667	SCAN_LAG	SYSTEM
expected	R1–R8	any	med/low	20 (40)	centre	≥ 75	record	record	record	Walksnail Avatar
measured										
bearing	0°: _____ 15°: _____ 30°: _____ 45°: _____ σ: _____ digital K: _____ %dB kit set: _____									

ch held: the table channel nearest the kit's centre — Band A is Wi-Fi 149–173 (A7 = 149 ... A1 = 173), D1–D3 cover Wi-Fi 36–48, HDZero's and Walksnail's channels sit within 4 MHz of R1–R8, DJI O4's 5768.5 / 5789.5 / 5794.5 / 5814.5 MHz fall to R4 / B4 / B4 / B5 and a CE unit to D1–D3. *fc_mhz*: the kit's centre. *conf* is high at duty ≥ 90 with the deciding feature clear of its threshold, med otherwise, low when *cls* is wb. A 60 MHz O4 mode reads as the 40 bucket. *bearing*: true – bearing_deg at each rotation, σ = bearing_sigma_deg reported, kit set = the channel / bandwidth selected on the kit.

Dual-band

2.4 GHz.

Repeat the block for any kit with a 2.4 GHz mode (DJI OcuSync 2 / DJI FPV, an OpenIPC link on a 2.4 GHz adapter): h G1–h G5, the same w and rotation. Under test are the patches' 2.4 GHz side, ANTENNA_GAIN_DBI_24 (6 dBi → 90° beam, K 4.7 %dB) and the _24 calibration from stage 5; the mapper labels it a 2.4 GHz digital video link. Expect every 2.4 GHz access point in view as dot11 traffic (idle: duty under 90, "Wi-Fi traffic" in the mapper). The I/Q bus at BW40 on 2.4 GHz is itself unproven (stage 1, h G3).

drone-sentinel · level1 · 2026-10-07 · firmware builds (CI and local), host tests pass, nothing bench validated

Page 9 of 9