

I/Q imbalance predistortion schemes for OFDM systems

Jihoon Lee and Jin Kwan Kim

Abstract—In this paper, we propose two novel predistortion schemes to mitigate I/Q imbalance in Orthogonal Frequency Division Multiplexing (OFDM) communication systems: RF signal-based and deep learning-based schemes. With the RF signal-based scheme, gain and phase errors are estimated in real time using feedback from the RF signal. With the deep learning-based scheme, I/Q imbalance predistortion is performed using Bidirectional Long Short-Term Memory (BLSTM). The simulation results show that the proposed schemes reduce the Bit Error Rate (BER) in OFDM systems.

Index Terms—I/Q imbalance, predistortion, deep learning, OFDM

I. INTRODUCTION

WITH the evolution from 5G New Radio (NR) to the emerging sixth generation (6G) wireless systems, there is an increasing demand for higher data rates, lower latency, and massive connectivity. Both 5G and 6G systems adopt Orthogonal Frequency Division Multiplexing (OFDM)-based waveform as their fundamental air interface [1]–[3]. Recent 3GPP standardization activities have reached a consensus that 6G will employ CP-OFDM for the downlink and DFT-s-OFDM for the uplink as the baseline waveforms [2], [3].

OFDM offers several advantages, including high spectral efficiency and strong robustness against multi-path fading and Doppler effects [4]. It is also resilient to narrow-band interference and enables high-speed signal processing through Fast Fourier Transform (FFT) techniques, facilitating efficient hardware implementation. Moreover, OFDM systems do not require complex equalizers and exhibit strong resistance to impulse noise. Due to these characteristics, OFDM remains a widely adopted modulation scheme for ultra-high speed wired and wireless communication systems worldwide, with extensive ongoing standardization efforts based on OFDM technologies. However, OFDM systems are highly sensitive to impairments such as frequency offset, high Peak-to-Average Power Ratio (PAPR), DC offset, in-phase/quadrature imbalance, and phase noise [5], [6].

Modern wireless systems demand highly integrated, low-cost receivers. Zero Intermediate Frequency (zero-IF) receivers have been widely adopted [7]. However, while baseband processing occurs in the digital domain, up/down-conversion is performed in the analog domain, where I/Q imbalance is inevitable due to gain and phase mismatches [8]. In addition,

as wireless systems move toward higher frequency bands and wider bandwidths in 6G, the impact of I/Q imbalance becomes more severe, making effective compensation techniques increasingly critical.

Several research efforts have addressed I/Q imbalance [9]–[11]. However, these require additional pilot signals, reducing resource efficiency, and focus on post-compensation at the receiver rather than pre-compensation. Since post-compensation results in larger residual errors, pre-compensation is preferable. We propose two predistortion schemes: (1) RF signal-based without pilot signals, and (2) BLSTM-based [12]–[14].

The simulation results demonstrate that the proposed predistortion schemes improve the Bit Error Rate (BER) performance of the OFDM system under I/Q imbalance conditions.

II. SYSTEM MODEL

A. OFDM System

In an OFDM system, a high-rate data stream is divided into multiple low-rate data streams. The time-domain OFDM signal $x(t)$ is [4]

$$x(t) = \frac{1}{N} \sum_{n=0}^{N-1} X_n e^{j2\pi n \Delta f t}, \quad 0 \leq t < T \quad (1)$$

where N denotes the number of subcarriers, X_n represents the data symbol on the n th subcarrier, $\Delta f = 1/T$ is the subcarrier spacing and T is OFDM symbol duration. In (1), the time-domain OFDM signals $x(t)$ can be expressed as a sum of in-phase signal $I(t)$ and quadrature signal $Q(t)$ ($x(t) = I(t) + jQ(t)$).

B. I/Q Imbalance

In the up-conversion process, in-phase and quadrature signals are mapped onto cosine and sine waves of Local Oscillator (LO), respectively. In ideal up-conversion, the RF signal $s(t)$ is

$$s(t) = I(t) \cdot \cos(\omega_c t) + Q(t) \cdot \sin(\omega_c t), \quad (2)$$

where ω_c is the carrier frequency of the RF signal.

Fig. 1 shows the I/Q imbalance of the LO. The signal with I/Q imbalance $\hat{s}(t)$ can be expressed as [8]

$$\begin{aligned} \hat{s}(t) = & I(t) \left(1 + \frac{\varepsilon}{2}\right) \cos\left(\omega_c t + \frac{\varphi}{2}\right) \\ & + Q(t) \left(1 - \frac{\varepsilon}{2}\right) \sin\left(\omega_c t - \frac{\varphi}{2}\right), \end{aligned} \quad (3)$$

where ε and φ are the gain and phase errors, respectively.

J. Lee is with Satellite Communication Research Division, Electronics and Telecommunications Research Institute (ETRI), Daejeon 34129, Republic of Korea (e-mail: jihoonlee0104@etri.re.kr).

J. K. Kim (corresponding author) is an independent researcher, Taean, Chungcheongnam-do 32164, Republic of Korea (e-mail: tull00@hanyang.ac.kr).

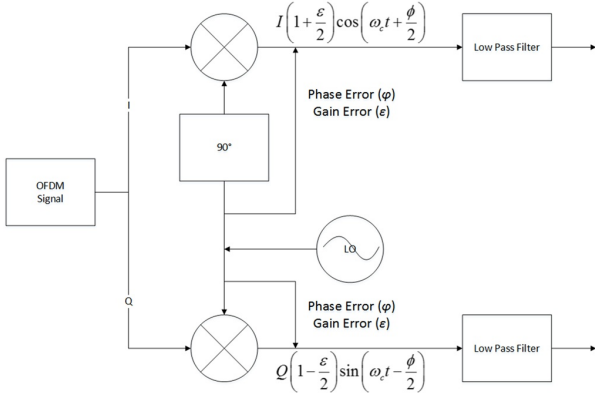


Fig. 1. I/Q imbalance of the local oscillator

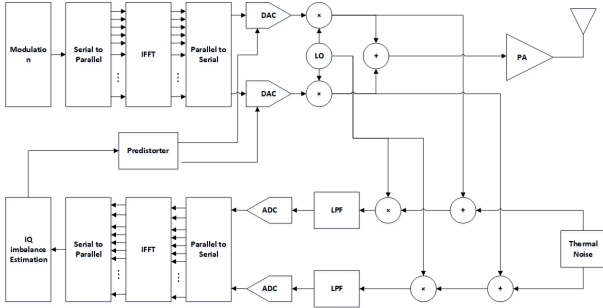


Fig. 2. Transmitter structure with I/Q imbalance predistorter based on RF signal.

III. I/Q IMBALANCE PREDISTORTION SCHEMES

A. RF signal-based predistortion of I/Q imbalance

Fig. 2 shows the transmitter structure with I/Q imbalance predistorter based on the RF signal. The RF-based scheme uses feedback from the transmitted RF signal. A transmitter down-converts the RF signal using the LO used in the up-conversion process. The down-conversion signal $\tilde{x}(t)$ can be expressed as the sum of in-phase signal $\tilde{I}(t)$ and quadrature $\tilde{Q}(t)$ ($\tilde{x}(t) = \tilde{I}(t) + j\tilde{Q}(t)$). Then, $\tilde{I}(t)$ and $\tilde{Q}(t)$ can be expressed as

$$\begin{aligned} \tilde{I}(t) &= \int_0^t \hat{s}(\tau) \left(1 + \frac{\varepsilon}{2}\right) \cos\left(\omega_c \tau + \frac{\varphi}{2}\right) + n(\tau) d\tau \\ &= I_L(t) \left(1 + \frac{\varepsilon}{2}\right)^2 - Q_L(t) \left(1 - \frac{\varepsilon^2}{4}\right) \sin\varphi + n_L(t), \end{aligned} \quad (4)$$

$$\begin{aligned} \tilde{Q}(t) &= \int_0^t \hat{s}(\tau) \left(1 - \frac{\varepsilon}{2}\right) \sin\left(\omega_c \tau - \frac{\varphi}{2}\right) + n(\tau) d\tau \\ &= Q_L(t) \left(1 - \frac{\varepsilon}{2}\right)^2 - I_L(t) \left(1 - \frac{\varepsilon^2}{4}\right) \sin\varphi + n_L(t), \end{aligned} \quad (5)$$

where $I_L(t)$, $Q_L(t)$ and $n_L(t)$ represent the I and Q signals and internal thermal noise after low-pass filtering, respectively.

In (4) and (5), ε^2 can be negligible for $0 < \varepsilon < 0.1$. Then, from (4) and (5), the gain error ε_T and the phase error φ_T can be estimated as

$$\varepsilon_T = \frac{I(t)\tilde{I}(t) - Q(t)\tilde{Q}(t) - (I^2(t) - Q^2(t))}{I^2(t) + Q^2(t)}, \quad (6)$$

$$\varphi_T = \sin^{-1} \left(\frac{2I(t)Q(t) - (I(t)\tilde{Q}(t) - Q(t)\tilde{I}(t))}{I^2(t) + Q^2(t)} \right). \quad (7)$$

B. Deep learning based predistortion of I/Q imbalance

Under ideal conditions, the RF signal-based scheme achieves near-ideal BER performance. However, the performance degradation of predistortion can be observed in environments with noise in the internal circuitry. This performance degradation is considered to result from the process of converting the RF signal through the DAC and the subsequent internal feedback loop involved in the RF signal-based predistortion scheme. In this subsection, the deep learning based predistortion of I/Q imbalance is proposed, which does not involve the internal feedback or DAC processes.

In this paper, we employ a BLSTM as a deep learning-based approach. Based on BLSTM, we propose a novel I/Q imbalance predistortion technique.

Unlike traditional LSTM, BLSTM processes the information in both the forward and backward directions, considering both past and future patterns. When processing the data x_t at the current time t , the model can simultaneously analyze the influence of past data ($x_{t-1}, x_{t-2}, \dots$) and future data ($x_{t+1}, x_{t+2}, \dots$) on the current data x_t [12]–[14].

At the input layer, the real and imaginary parts of the complex signal affected by I/Q imbalance are separately fed into the BLSTM model. These signals pass through both forward and backward BLSTM layers, which learn time-dependent features. The forward and backward hidden states, denoted by $\vec{h}_t$ and $\overleftarrow{h}_t$, are expressed as

$$\vec{h}_t = LSTM_{forward}(x_t, \vec{h}_{t-1}), \quad (8)$$

$$\overleftarrow{h}_t = LSTM_{backward}(x_t, \overleftarrow{h}_{t+1}). \quad (9)$$

Then, the combined hidden state h_t , obtained by combining the forward and backward hidden states, can be expressed as

$$h_t = [\vec{h}_t, \overleftarrow{h}_t]. \quad (10)$$

The BLSTM model is trained using pairs of signals with I/Q imbalance and their corresponding ideal signals. The loss function L is defined as the Mean Squared Error (MSE) and can be expressed as

$$L = \frac{1}{N} \sum_{i=1}^N (|I_{i,ideal} - I_{i,comp}|^2 + |Q_{i,ideal} - Q_{i,comp}|^2), \quad (11)$$

where $I_{i,ideal}$ and $Q_{i,ideal}$ are in-phase and quadrature part of the ideally predistorted signal, respectively. On the other hand, $I_{i,comp}$ and $Q_{i,comp}$ are in-phase and quadrature part of the predistorted signal obtained through training, respectively. Finally, the model is trained using the training dataset, which consists of OFDM symbols with I/Q imbalance, and the

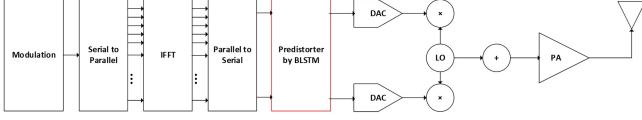


Fig. 3. The example of transmitter structure with I/Q imbalance predistorter by BLSTM

defined loss function based on the MSE. Through the optimization process, the model learns to effectively compensate for I/Q imbalance by minimizing the defined loss between the ideal and the compensated signals.

For I/Q imbalance predistortion, the use of BLSTM algorithm offers several advantages. It can effectively compensate for non-linear I/Q imbalance, which is challenging for conventional linear compensation algorithms. Moreover, BLSTM is capable of capturing the time-dependent changes in I/Q imbalance, making it suitable for dynamically changing environments. However, the BLSTM-based I/Q imbalance predistortion also presents certain limitations. It requires a large amount of training set to achieve reliable performance, and the training process can be computationally intensive and time-consuming. In addition, the implementation may demand more computational resources compared to traditional compensation techniques.

In this paper, considering the system complexity and hardware limitations, the OFDM system is designed with an FFT size of 32. The proposed BLSTM model consists of an input layer, two BLSTM hidden layers, and an output layer. The first and second BLSTM hidden layers contain 70 and 90 units, respectively, chosen to balance model accuracy and computational complexity under real-time processing constraints. The first layer captures fundamental I/Q imbalance patterns across 32 subcarriers, while the second layer models non-linear interactions between subcarriers. This achieves near-optimal MSE performance while maintaining processing within one OFDM symbol duration. To train the BLSTM model, the Root Mean Square Propagation (RMSProp) optimizer was used. The batch size was set to 32, and training was conducted over 60 epochs. The training dataset consisted of a total of 3,200,000 OFDM symbols, which were split into training (2,560,000 symbols) and test (640,000 symbols) sets at a ratio of 4:1.

Fig. 3 shows the example of OFDM transmitter structure including the BLSTM used for I/Q imbalance predistortion. In Fig. 3, the BLSTM is applied after the Parallel-to-Serial (P/S) conversion. During the BLSTM processing, the OFDM symbols are predistorted to mitigate the I/Q imbalance and then up-converted to the RF signal.

IV. SIMULATION RESULTS

In this section, simulation results are presented. The OFDM signal is modulated by Quadrature Phase Shift Keying (QPSK), and the number of subcarriers is set to 32. For BLSTM training, the input and target data are set to signals with I/Q imbalance and the corresponding ideal signals, respectively. The BLSTM training is performed independently for the I and Q components. The I/Q imbalance is modeled

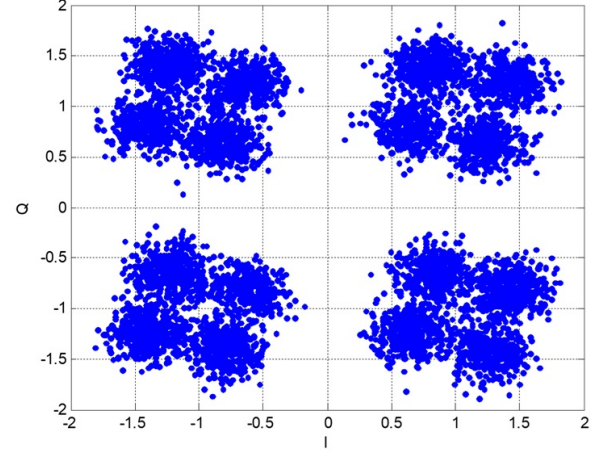


Fig. 4. Signal constellation in an AWGN channel with both amplitude and phase imbalances

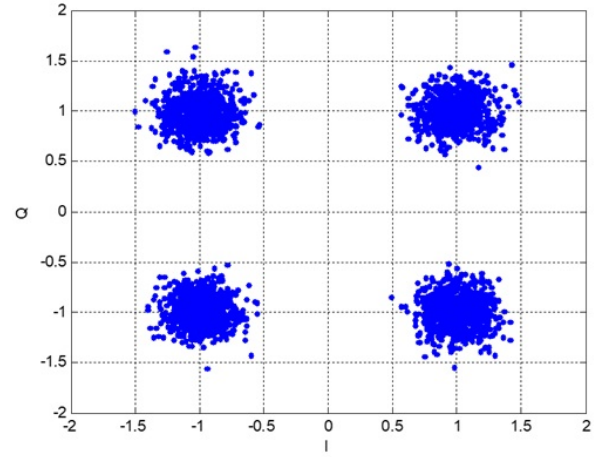


Fig. 5. Signal constellation in an AWGN channel after I/Q imbalance compensation

by assuming a gain error uniformly distributed in the range of $0.3 \sim 0.6$ and a phase error uniformly distributed in the range of $5^\circ \sim 8^\circ$. For comparison, the RF signal-based predistortion scheme is evaluated under ideal conditions, where the effect of internal feedback loop errors is not taken into account.

The performance of the training model was evaluated using the MSE. On the test set, the proposed BLSTM-based predistortion model achieved an MSE of 1.2×10^{-4} , demonstrating stable compensation performance under the considered I/Q imbalance conditions. In particular, the model demonstrated stable predistortion performance even for I/Q imbalance parameters that were not included in the training set, validating its strong generalization capability. These experimental results confirm that the proposed BLSTM architecture is effective for I/Q imbalance predistortion and achieves the performance suitable for practical system implementation.

A. Signal constellation under I/Q imbalance

Fig. 4 shows the signal constellation in an AWGN channel with I/Q imbalance at an E_b/N_0 of 15 dB. As shown in Fig.

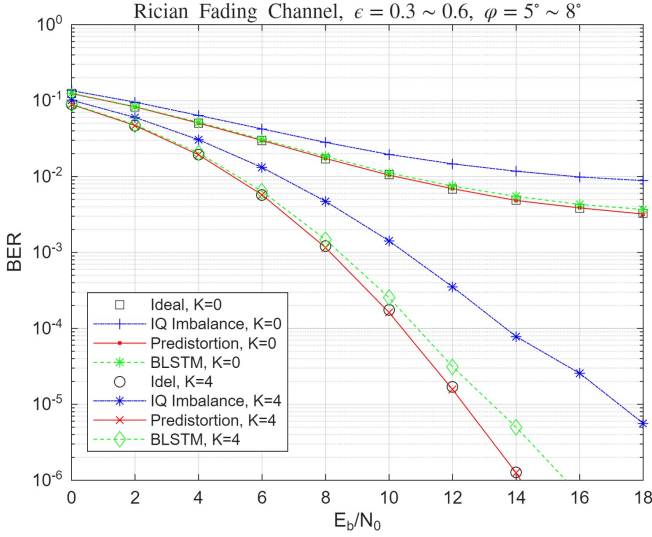


Fig. 6. BER performance with and without I/Q imbalance predistortion in Rician fading channel

4, the constellation is both dispersed and rotated when both gain and phase imbalances are present. This is because I/Q imbalance is typically modeled using discrete amplitude and phase error parameters, unlike other RF impairments such as phase noise and non-linear amplification. Consequently, this imbalance not only causes rotation of the constellation but also leads to the formation of multiple distinct clusters.

Fig. 5 shows the signal constellation after I/Q imbalance compensation using the proposed BLSTM-based predistortion under the same conditions as Fig. 4. From the results in Figs. 4 and 5, it can be observed that the constellation cloud is significantly reduced after the compensation of I/Q imbalance using BLSTM-based predistortion.

B. BER performance

Fig. 6 shows the BER performance of two proposed predistortion schemes in an Rician channel with K factors of 0 and 4. For comparison, the results for the uncompensated case and the ideal case (no I/Q imbalance) are also plotted. For the BER of 10^{-2} , the RF signal-based and BLSTM-based predistortion schemes achieve approximately 6.0 dB and 5.5 dB performance improvements, respectively, compared to the uncompensated case under a Rician fading channel with a K factor of 0. For the BER of 10^{-5} , the RF signal-based and BLSTM-based predistortion schemes achieve approximately 5.0 dB and 4.5 dB performance improvements, respectively, compared to the uncompensated case under a Rician fading channel with a K factor of 4.

As shown in Fig. 6, the RF signal-based scheme shows near-ideal performance. The BLSTM-based scheme exhibits about 0.5 dB performance gap compared to the RF signal-based scheme because the RF scheme directly measures errors in real time, while BLSTM relies on training set covering limited ranges. Moreover, the presence of residual MSE error 1.2×10^{-4} and the computational complexity constraints that limit the model capacity result in the 0.5 dB performance gap.

However, the performance of the BLSTM-based predistortion scheme could be further improved by using more refined training set and the application of optimal layers and parameters.

V. CONCLUSION

This paper proposed two novel predistortion schemes for I/Q imbalance mitigation in OFDM systems. These two predistortion schemes overcome the limitations of conventional techniques that require additional pilot signals and employ post-compensation with relatively large residual errors, providing an effective solution for mitigating I/Q imbalance exhibiting non-linear characteristics.

The performance of the proposed predistortion schemes is evaluated by simulation. The simulation results show that the RF signal-based predistortion scheme achieves performance nearly identical to the ideal case without I/Q imbalance, whereas the BLSTM-based predistortion scheme shows a performance degradation of about 0.5 dB. This degradation is mainly due to the inherent characteristics of the BLSTM approach, including the need for sufficient training set and the considerable time required for initial training. With further improvements in training strategies and model capacity, the BLSTM-based predistortion scheme has the potential to reach performance comparable to that of the RF signal-based predistortion scheme.

REFERENCES

- [1] 3GPP TS38.211, *3rd Generation Partnership Project: 5G; NR; Physical channels and modulation*. ETSI, Sophia Antipolis, France, 2018.
- [2] 3GPP TSG RAN meeting #109, *Status Report to TSG*. Beijing, China, Sep. 2025.
- [3] 3GPP TSG RAN meeting #109, *Study on 6G Radio*. Beijing, China, Sep. 2025.
- [4] R. Prasad, *OFDM for wireless communications systems*, Norwood, MA, USA: Artech House, 2004.
- [5] S. Woo, D. Lee, K. Kim, Y. Hur, C. Lee, and J. Laskar, "Combined effects of RF impairments in the future IEEE 802.11n WLAN systems," in *Proc. IEEE VTC-SPRING*, Stockholm, Sweden, 2005, pp. 1346-1349.
- [6] H. Ryu, Y. S. Li, and J. Park, "Nonlinear analysis of the phase noise in the OFDM communication system," *IEEE Trans. Consumer Electron.*, vol. 50, no. 1, pp. 54-63, Feb. 2004.
- [7] A. A. Abidi, "Direct-conversion radio transceivers for digital communications," *IEEE Journal of Solid-State Circuits*, vol. 30, No. 12, pp. 1399-1410, Dec. 1995.
- [8] B. Razavi, *RF Microelectronics*, Upper Saddle River, NJ, USA: Prentice Hall, 1998.
- [9] A. Schuchert, R. Hasholzner, and P. Antonie, "A novel IQ imbalance compensation scheme for the reception of OFDM signals," *IEEE Trans. Consumer Electron.*, vol. 47, no. 3, pp. 313-318, Aug. 2001.
- [10] L. Anttila, M. Valkama, and M. Renfors, "Blind Compensation of Frequency-Selective I/Q Imbalances in Quadrature Radio Receivers: Circularity-Based Approach," in *Proc. IEEE ICASSP*, Honolulu, USA, 2007, pp. 245-248.
- [11] A. Kiyani, L. Anttila, Y. Zou, and M. Valkama, "Advanced Receiver Design for Mitigating Multiple RF Impairments in OFDM Systems: Algorithms and RF Measurements," *Journal of Electron. and Computer Engineer.*, vol. 2012, no. 3, pp. 1-16, Jan. 2012.
- [12] Y. Zhu, C. Gong, J. Luo, M. Jin, X. Jin, and Z. Xu, "Indoor Non-Line of Sight Visible Light Communication with a Bi-LSTM Neural Network," in *Proc. 2020 IEEE Intern. Conf. on Commun. Workshops (ICC Workshops)*, Dublin, Ireland, 2020, pp. 1-6.
- [13] Md. A. I. Sunny, M. M. S. Maswood, and A. G. Alharbi, "Deep learning-based stock price prediction using LSTM and bi-directional LSTM model," in *Proc. 2020 2nd Novel Intelligent and Leading Emerging Sciences Conference (NILES)*, Giza, Egypt, 2020, pp. 87-92.
- [14] Y. Imrana, Y. Xiang, L. Ali, and Z. Abdul-Rauf, "A bidirectional LSTM deep learning approach for intrusion detection," *Expert Syst. with App.*, vol. 185, no. 8, Dec. 2021.