



ALTium 365

Altium Designer

Essentials Course - Altium 365

Module 27: Output Job File for
Documentations and Fabrication and
Assembly outputs

Software, documentation and related materials:

Copyright © 2024 Altium LLC

All rights reserved. You are permitted to use this document provided that (1) the use of such is for personal use only and will not be copied or posted on any network computer or broadcast in any media, and (2) no modifications of the document are made. Unauthorized duplication, in the whole or part, of this document by any means, mechanical or electronic, including translation into another language, except for brief excerpts in published reviews, is prohibited without the express written permission of Altium LLC. Unauthorized duplication of this work may also be prohibited by local statute. Violators may be subject to both criminal and civil penalties.

ACTIVEBOM®, ActiveRoute®, A365™, Altium 365®, Altium Concord™, Altium Concord Pro™, Altium Designer®, AD™, Altium NEXUS®, Altium OnTrack™, Altium Vault®, Autotrax®, Camtastic®, Ciiva™, CIIVA SMARTPARTS®, CircuitMaker®, CircuitStudio®, Common Parts Library™, Concord™, Concord Pro®, Draftsman®, Dream, Design, Deliver®, DXP™, Easytrax®, EE Concierge®, Fearless HDI™, Geppetto®, Gumstix®, Learn, Connect, Get Inspired™, NanoBoard®, NATIVE 3D™, OCTOMYZE®, Octopart®, OnTrack™, Overo®, P-CAD®, PCBWORKS®, PDN Analyzer™, Protel®, Situs®, SmartParts™, Upverter®, X2®, XSignals® and their respective logos are trademarks or registered trademarks of Altium LLC or its affiliated companies. All other registered or unregistered trademarks referenced herein are the property of their respective owners and no trademark rights to the same are claimed.

Table of Contents

<u>Module 27: Output Job File for Documentations and Fabrication and Assembly outputs</u>	<u>3</u>
<u>1.1 Purpose</u>	<u>3</u>
<u>1.2 Shortcuts</u>	<u>3</u>
<u>1.3 Preparation</u>	<u>3</u>
<u>1.4 Output Job File</u>	<u>4</u>
<u>1.5 Bill of Materials</u>	<u>5</u>
<u>1.6 Output Job File</u>	<u>7</u>
1.6.1 Overview.....	7
1.6.2 Output Configuration	8
<u>1.7 Creating Local Outputs</u>	<u>10</u>
<u>1.7.1 Output Containers</u>	<u>10</u>
1.7.1.1 Folder Container	10
1.7.1.2 PDF Container	10
<u>1.7.2 Generating the Outputs.....</u>	<u>11</u>
1.7.2.1 Generating a PDF	11
1.7.2.2 Generating Files from Folder Structure	12

Module 27: Output Job File for Documentations and Fabrication and Assembly outputs

1.1 Purpose



In this exercise, students will see multiple fabrication and assembly outputs, mostly through predefined the Output Job file. This file allows users to generate output files in an easy fashion.



1.2 Shortcuts



Shortcuts when working with Module 27: Output Job File for Documentations and Fabrication and Assembly outputs

F » N » U: New Output Job File
Ctrl+S: Save Document

1.3 Preparation

1. **Close all existing projects and documents.**
2. Next, create a Copy / Clone of the Training Project Module 27 Output Job File
3. Select **File » Open Project...** to open the *Open Project* dialog.
4. Navigate to the predefined Training Project Module 27 Output Job File (Top\Projects\Altium Designer Essentials Training Course\...).
5. Select **Open Project as Copy...**  .
6. At the new dialog *Create Project Copy*:
 - a) Add your name to the project name: Module 27 Output Job File - [Your Name]
 - b) Add a description: Altium Essential Training - [Your Name]
 - c) Open the *Advanced* section
 - d) Select the Ellipsis Button  from the **Folder** configuration to open the *Choose Folder* Dialog
 - i) Select the folder with your name: Project\For Attendees\[Your Name]
 - ii) Select **OK**
 - e) Change the **Local Storage** path if needed.
 - f) Select **OK** to create the copy.
7. Wait until Altium Designer creates the copy of the project and opens the project in the *Projects* panel; this can take up to 1 minute.



For details how to Copy / Clone the predefined training project see Module 8 Making the Connection, Step 1.3 Preparation.

1.4 Output Job File

An Output Job file allows users to add, configure, and reuse a variety of output configurations. In this exercise the project you load has predefined Out Job files with configurations for Assembly and Fabrication. Having predefined Out Job Files, added to a Project Template, is best practice for the project flow.

Using predefined Out Job files

- Reduce the time for creating the PCB Documentation / and Fabrication files.
- Ensures that the documents have a uniform appearance.
- Ensure that all required information is part of the documentation / fabrication files.

The predefined outputs include e.g., Schematic and PCB printouts, Validation reports, Gerbers, and NC Drill file report and a Pick & Place output.



Altium also support managed Out Job File. At the Preferences, Section Data Management – Template – Default a Out Job File could be added as template for New Out Job Files.
Depending on your Altium Configuration the Out Job File we create next might look different.

1.5 Bill of Materials

In PCB assembly, a Bill of Materials (BOM) is a comprehensive list that details all the components, parts, and materials required to assemble a printed circuit board. It includes information such as component names, part numbers, quantities, and reference designators. The BOM is crucial for procurement, assembly, and quality control processes.

A BOM can be created as a standalone document or as part of the Output Job documentation.

8. Open any schematic document, such as `Digital_IO.SchDoc`.
9. To generate a Bill of Materials (BOM), we can go to **Reports » Bill of Materials** from the schematic environment. The BOM dialog will appear as shown in Figure 1.

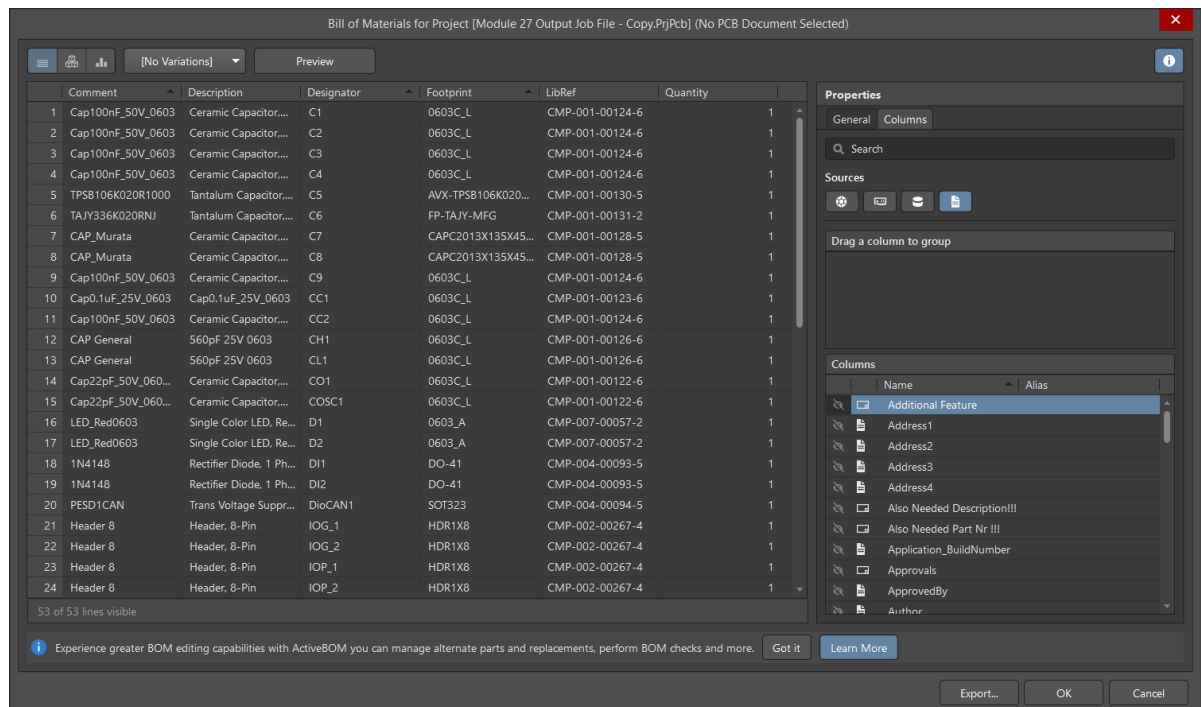


Figure 1. Bill of Materials dialog window

10. Currently, components appear individually on a single row because they are not grouped by any parameters. To group components based on parameters, the *Columns* tab of the Properties section will allow you to drag parameters into the *Grouped Columns* pane as shown in **Error! Reference source not found.**

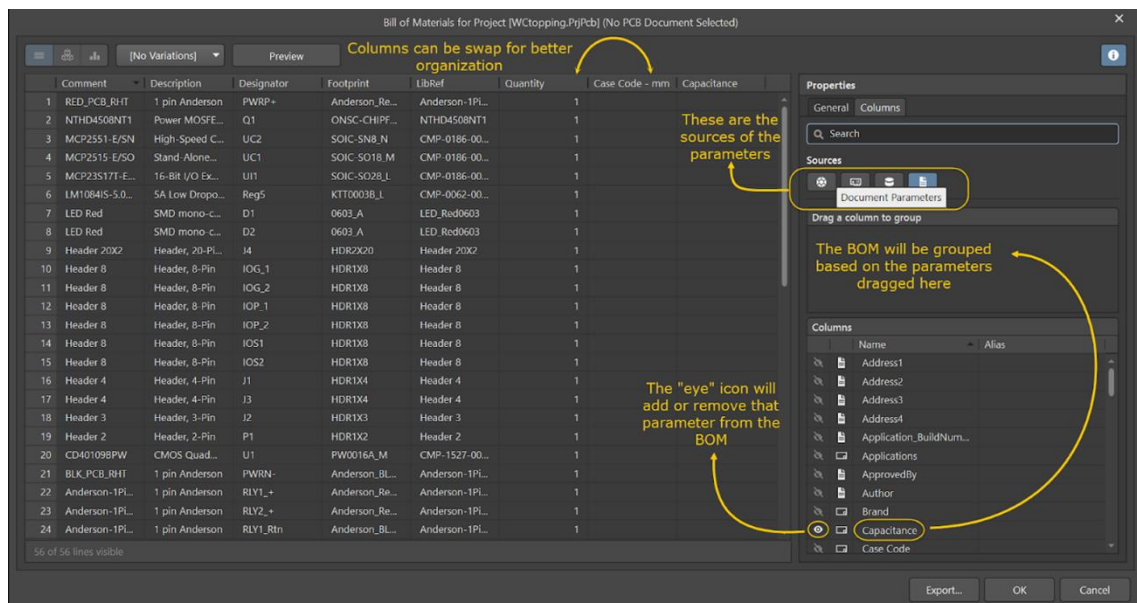



Figure 2. BOM configuration

11. To control which parameters are available in the Bill of Materials, you can enable or disable the options under the *Sources* pane. If you hover over the icons under the *Sources* tab, it will show you where the parameters originate from as shown in **Error! Reference source not found.**
12. Component parameters can be added or removed from your Bill of Materials, by selecting the  eye icon in the Columns pane. Columns can also be re-arranged by dragging their headers to the intended locations. An example of this is shown in **Error! Reference source not found.**
13. Under the *Export Options* from the *General* tab, select **MS-Excel (*.xls)** as the file format as shown in Figure 3. Select **Export** to generate the report.
Note: If in the **File Format** drop down menu the MS-Excel option is in red type it is an unavailable option, choose the Generic XLS option instead.
14. **Save** the file to a location of your choice and close the generated Excel file upon opening.

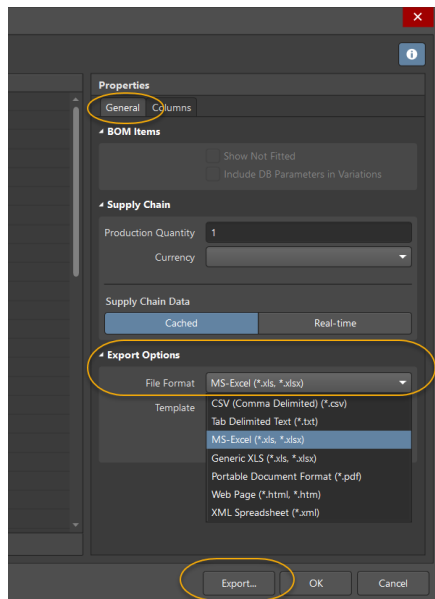


Figure 3. BOM export options

15. Select **OK** to save and close the BOM dialog.

1.6 Output Job File

1.6.1 Overview

In this project we have two predefined Output Job files, we will explore these to see how they were setup, and how the output files can be configured.

16. Open the two Output Job files. At the *Projects* Panel open the section, Module 27 Out Job File → Settings → Out Job File.

- Assembly.OutJob
- Fabrication.OutJob

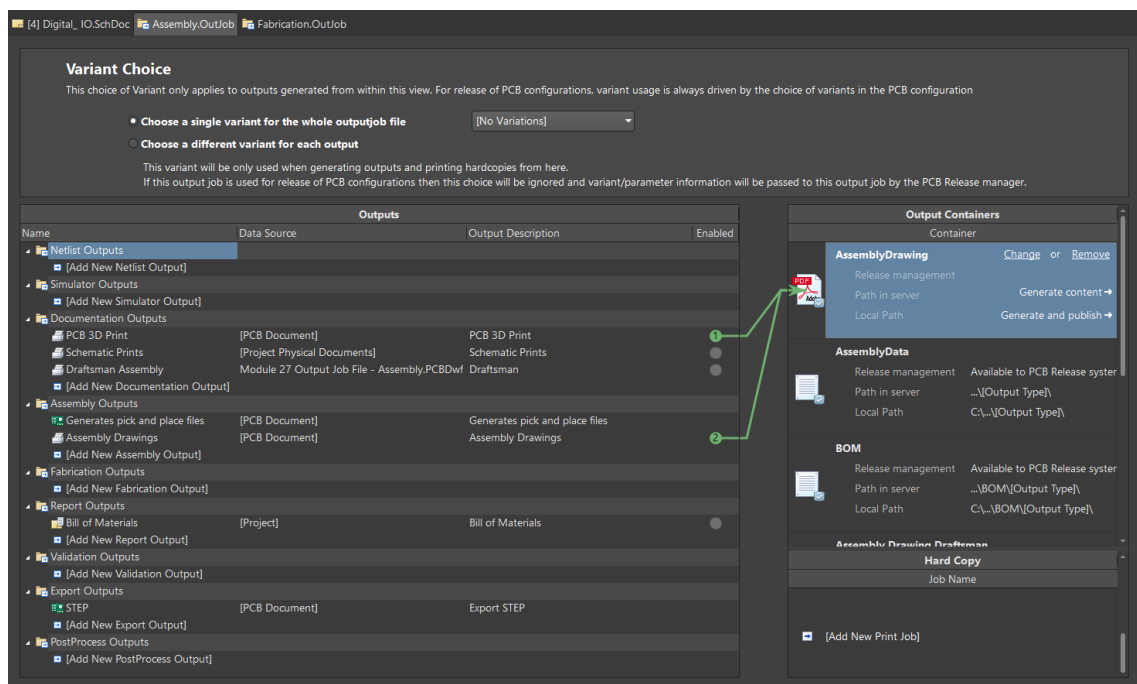


Figure 4. Assembly Output Job File


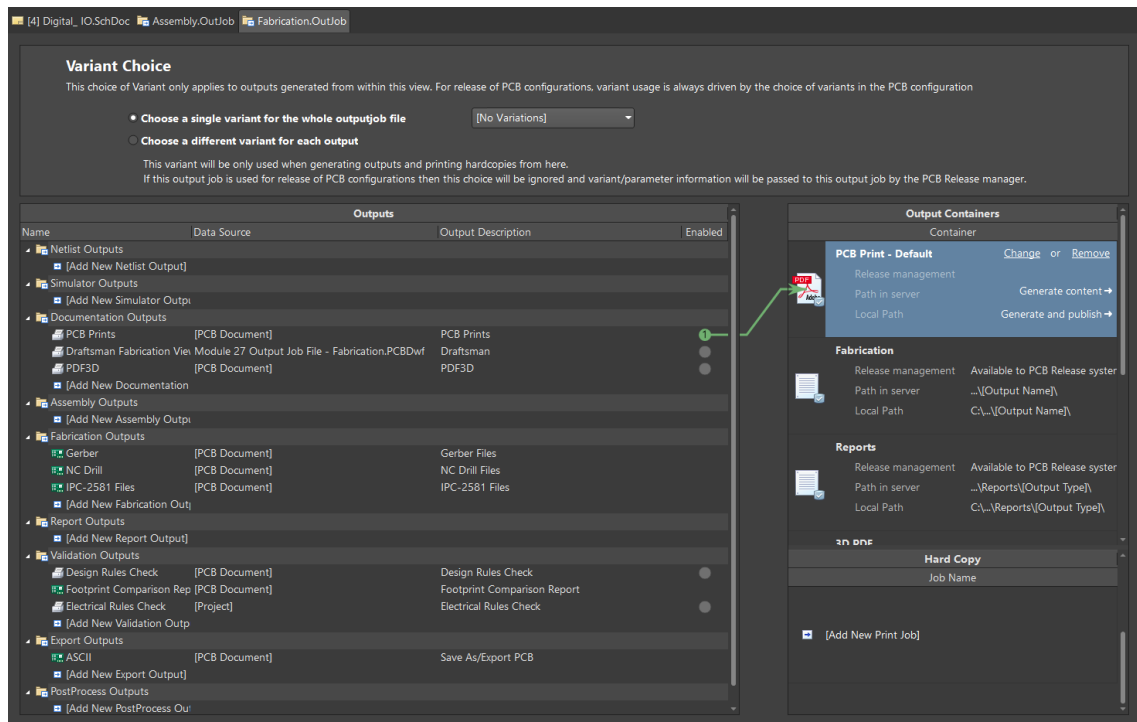


Figure 5. Fabrication Output Job File

1.6.2 Output Configuration



The training example has predefined Output Job files. If you start from scratch or if you want to add additional Outputs to an existing Output Job file you select at the specific category, e.g., *Assembly Outputs*, select the last element in the list **Add New...** and select the Output you wanted to add.

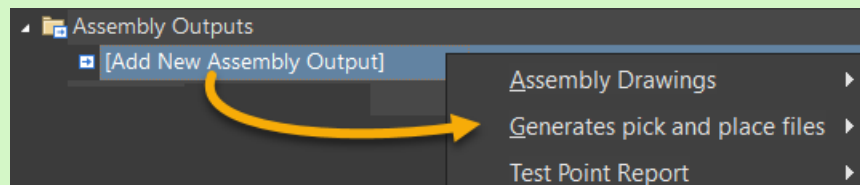

17. Change the focus to the `Assembly.Outjob` file.
18. Next, we will configure one of the outputs.
19. Right mouse click on the `Schematic Prints` section, and select **Configure** to see the Preview pop-up window, as shown in Figure 6.
20. At the `Schematic Preview` window, select **Color** and then **Refresh** options to see the schematic documents.

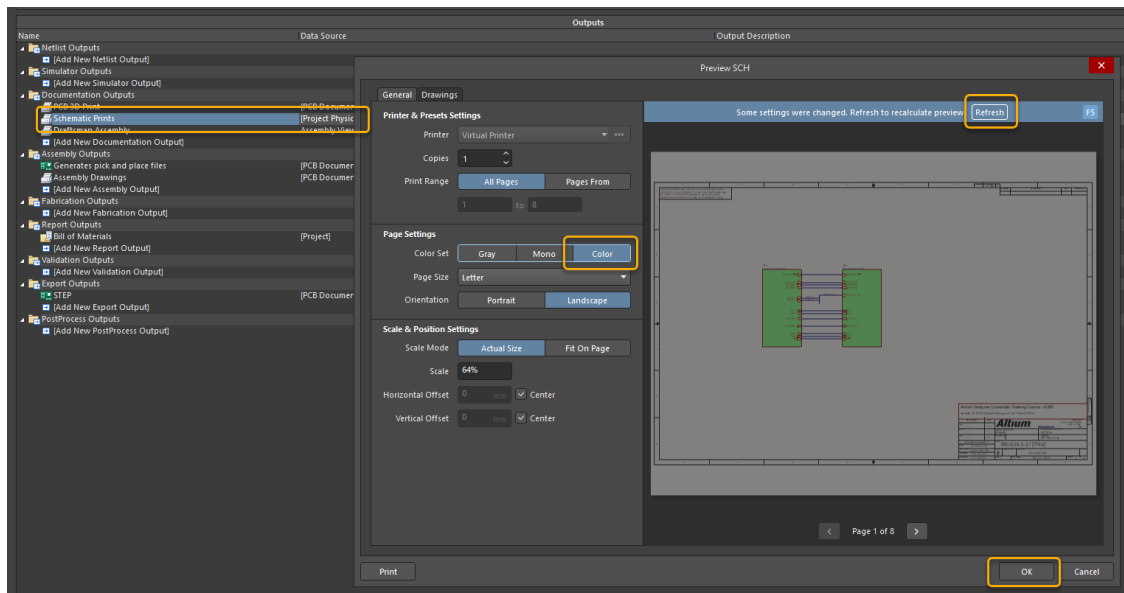


Figure 6. Schematic Prints

21. Same as above explore the other outputs in both the Assembly and Fabrication Output Job files, e.g., the BOM Output you have seen as general output from the menu **Report** at section 1.5 Bill of Materials.

1.7 Creating Local Outputs

Next, we create some local outputs. The local outputs allow you to check the generated outputs, e.g., Gerber, before you release the project to the workspace.

1.7.1 Output Containers

1.7.1.1 Folder Container

Output Container: Folder type allows you to generate native file formats e.g., Gerber, NC Drill, etc.

22. Change the focus to the `Fabrication.Outjob` file.

23. In the *Output Containers* section on the right side of the Output Job file, click on **Fabrication** to select it, as shown in Figure 7.

24. Check the radio buttons in the *Enabled* column and the connections from the radio buttons to the Output Container. This is the configuration to map the outputs to a container in a specific order, shown in Figure 7.

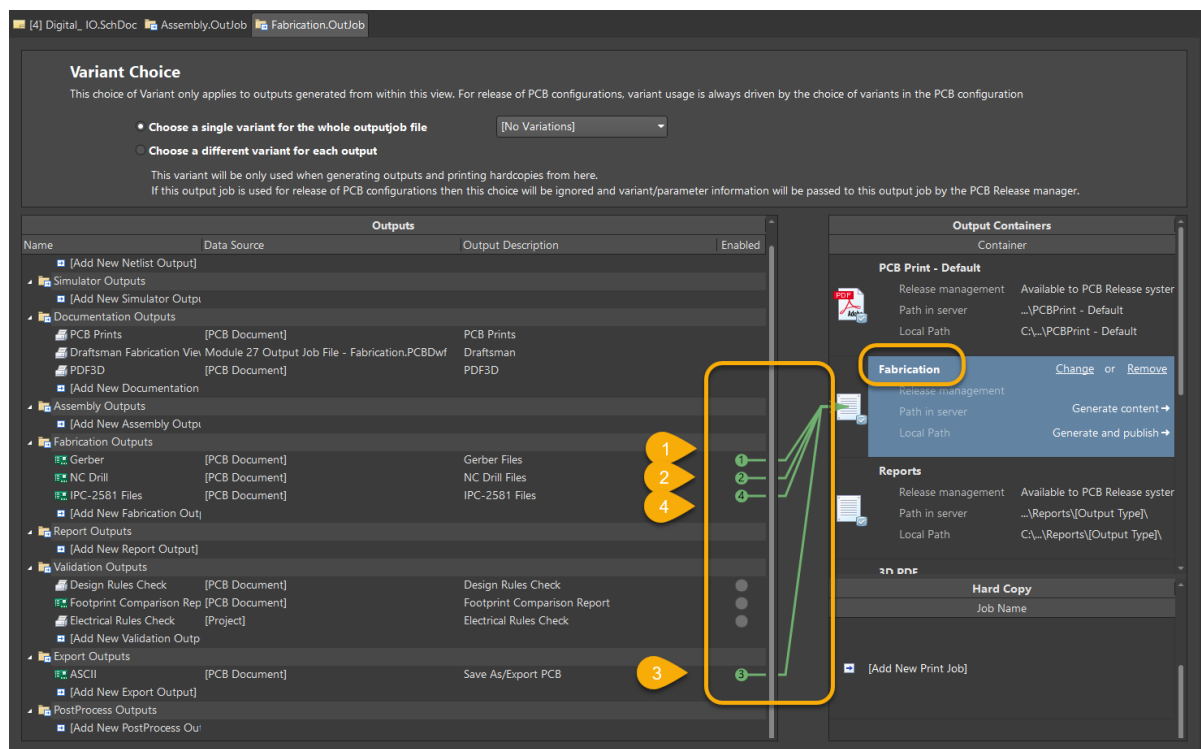


Figure 7. Output Job File with outputs linked to PDF container

1.7.1.2 PDF Container

Output Container: Folder type allows you to generate native file formats e.g., SCH, PCB, etc.

25. In the *Output Containers* pane, select **PCB Print Default**.

26. Similar to containers type *Folder*, you see the connection from the container to the linked outputs.

27. Change the focus back to the **Fabrication** container.

1.7.2 Generating the Outputs

1.7.2.1 Generating a PDF

Next, we will generate some example outputs to demonstrate the flow for Out Job files.

28. Change the focus to the `Assembly.Outjob` file.

29. To create the PDF for Schematic file, highlight the PDF container *Documentation* and click on the **Generate Content** → link as shown in Figure 8.

30. For the training example the PDF file will pop up after processing, if a PDF viewer is installed at your PC, and will be saved to the `Project Outputs` for `WCTopping` project sub-folder.

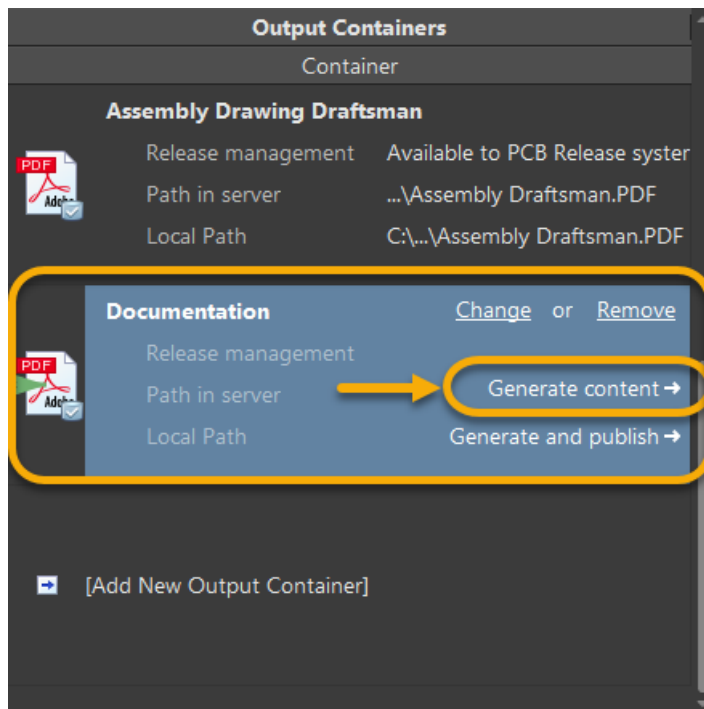


Figure 8. Generating the PDF outputs

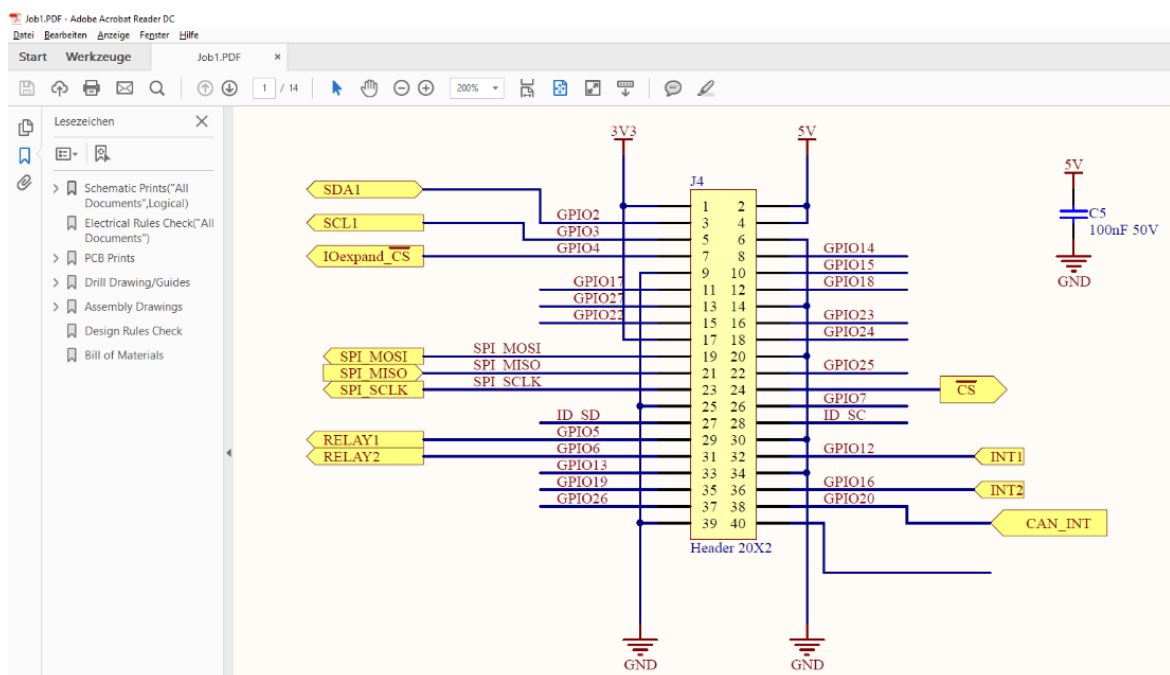


Figure 9. Generated PDF based on our outputs from the Output Job

1.7.2.2 Generating Files from Folder Structure

31. Change the focus to the *Fabrication.OutJob* file and the output container *Fabrication*. Click on the **Generate content** to generate a set of Fabrication files (Gerber, NC Drill, PCB ASCII, and IPC-2581) as shown at Figure 10.

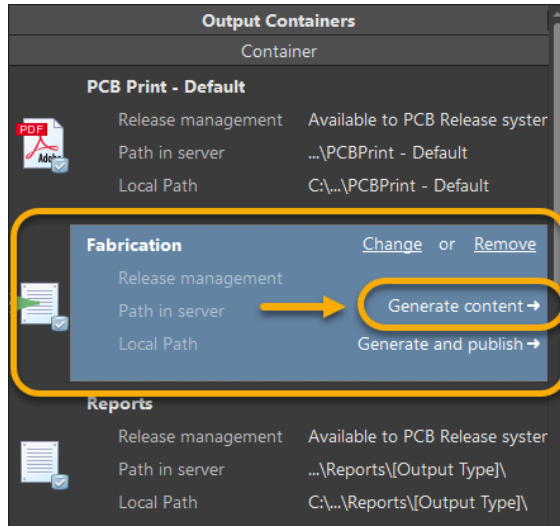


Figure 10. Generate Content - Fabrication Container

32. After the different Outputs are generated (this may take up to several minutes, depending on the Design size and PC performance) the individual outputs will appear at the *Projects* panel as shown in Figure 11.

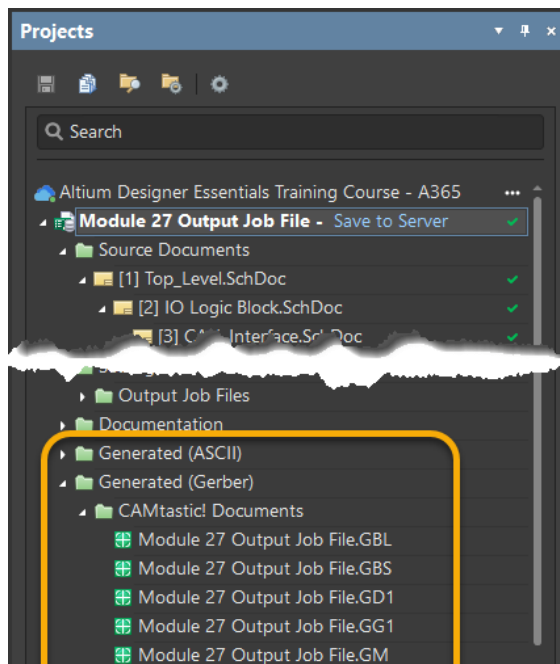


Figure 11. Folder Structure outputs generated from the Output Job




For our example these files will be saved to the *Project Outputs for...* project sub-folder on your Hard Drive.
If you wanted to save these generated files in another folder, choose the Output Container, select **Change** and specify a new path and structure for the Output Folder. The configuration of the Output container also include additional options like **Open generated Outputs** or **CAMtastic Auto-Load Options**.

33. Select **File » Save All** to save all modifications.

34. Save the modifications to the server:

a) At the *Project* panel, next to the Project name you find the command

Save to Server .

b) Select **Save to Server**.

c) At the dialog *Save [Project Name]*,

i) Activate the checkboxes for the files that are not under version control.

ii) Add the comment `Module 27: Output Job File for Documentations and Fabrication and Assembly outputs - [Add Your Name]- Finished`

iii) Click on **OK**

35. When ready, close the project and any open documents, **Window » Close All**.

Congratulations on completing the Module!

Module 27: Output Job File for Documentations
and Fabrication and Assembly outputs

from the

**Altium Designer Essential Course
with Altium 365**

Thank you for choosing Altium Designer