


Bosch Sensortec BMI088 Breakout Board

6-Axis Inertial Measurement Unit (IMU) Module

General Description

This module contains a 6-axis inertial measurement unit (IMU) that can be accessed via SPI or I²C. The IMU provides a 3-axis gyroscope and a 3-axis accelerometer.

Connection Diagram (SPI)

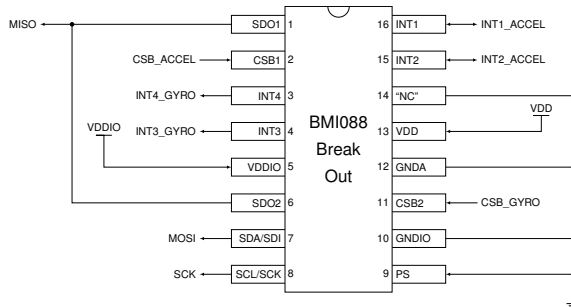


Write: First Byte is {MSB=0, 7-bit Register Address}

Read: First Byte is {MSB=1, 7-bit Register Address}

Supports SPI speeds up to 10 MHz.

Connection Diagram (I²C)

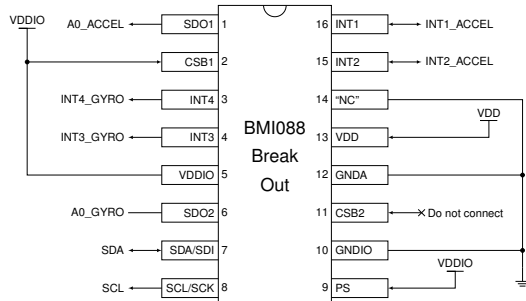

7-bit Accelerometer I²C Address (SDO1=0): 0011000_B = 18_H

7-bit Accelerometer I²C Address (SDO1=1): 0011001_B = 19_H

7-bit Gyroscope I²C Address (SDO2=0): 1101000_B = 68_H

7-bit Gyroscope I²C Address (SDO2=1): 1101001_B = 69_H

Supports I²C speeds up to 400 kHz.

Electrical Characteristics

Parameter	Conditions	MIN	TYP	MAX	UNITS
Supply Voltages					
VDD		2.4		3.6	V
VDDIO		1.2		3.6	V
Supply Currents					
Total Supply Current	Normal Mode, 3.0 V		0.15		mA
	Suspended Mode, 3.0 V		3		μA

Further Details

For further details, please consult the datasheet for the Bosch Sensortec BMI088 IMU.

Acknowledgment

This work was supported by the City of Vienna via the project "Stadt Wien Kompetenzzentrum für Drohnentechnik in der Fachhochschulausbildung" (MA23 Projekt Nr. 35-02)

Version: 1.0 (2026-06-12)