Funded by City of Vienna, Economic Affairs, Labour and Statistics


# Infineon DPS368 Breakout Board

## Digital XENSIV™ Barometric Pressure Sensor Module

## General Description

DPS368 is a miniaturized Digital Barometric Air Pressure Sensor robust against water, dust, and humidity. It can be accessed via SPI or I²C.

### Connection Diagram (SPI)

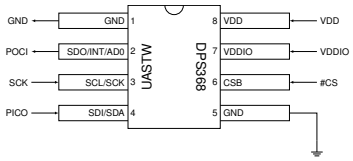



Write: First Byte is {MSB=0, 7-bit Register Address}

Read: First Byte is {MSB=1, 7-bit Register Address}

Supports SPI speeds up to 10 MHz.

### Connection Diagram (I²C)

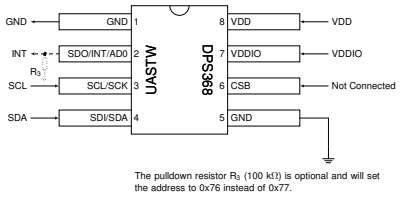


The pulldown resistor $R_3$ (100 kΩ) is optional and will set the address to 0x76 instead of 0x77.

7-bit I2C Address (AD0 floating): 0b1110111 = 0x77

7-bit I2C Address (AD0 pulled down): 0b1110110 = 0x76

Supports I2C speeds up to 400 kHz as well as High-Speed Mode (up to 3.4 MBit/s).

## Electrical Characteristics

| Parameter | Conditions | MIN | TYP | MAX | UNITS |
|---|---|---|---|---|---|
| Supply Voltages | | | | | |
| VDD | | 1.7 | | 3.6 | V |
| VDDIO | | 1.2 | | 3.6 | V |
| Supply Currents | | | | | |
| Avg. Supply Current | Pressure Meas @ 1Hz | | 1.7 | | µA |
| | Temperature Meas @ 1Hz | | 1.5 | | µA |
| | Standby | | 0.5 | | µA |

## Further Details

For further details, please consult the datasheet for the Infineon DPS368 sensor.

## Acknowledgment

This work was supported by the City of Vienna via the project “Stadt Wien Kompetenzteam für Drohnentechnik in der Fachhochschulausbildung” (MA23 Projekt Nr. 35-02)

Version: 1.0 (2026-06-12)