


Power

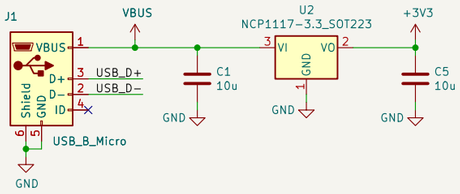

Primary Flash

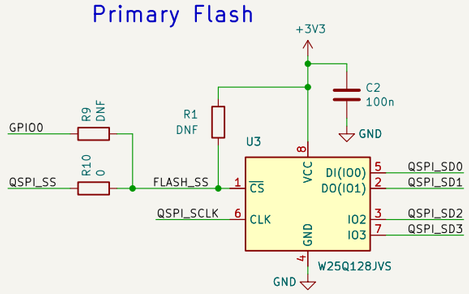


Secondary Flash/PSRAM

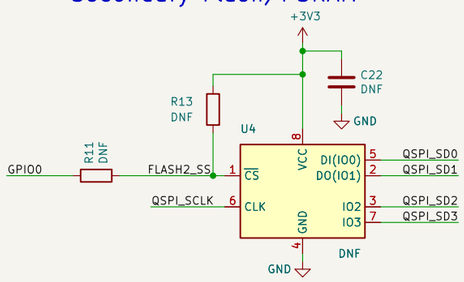


Optional Secondary flash or PSRAM (U4), using the second chip select (XIP_SS_N[1]) on GPIO0.
N.B. Pull-up R13 will be required as GPIOs default to pull-downs at power-up.


12MHz Crystal

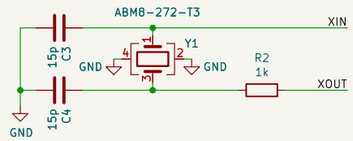

IOs

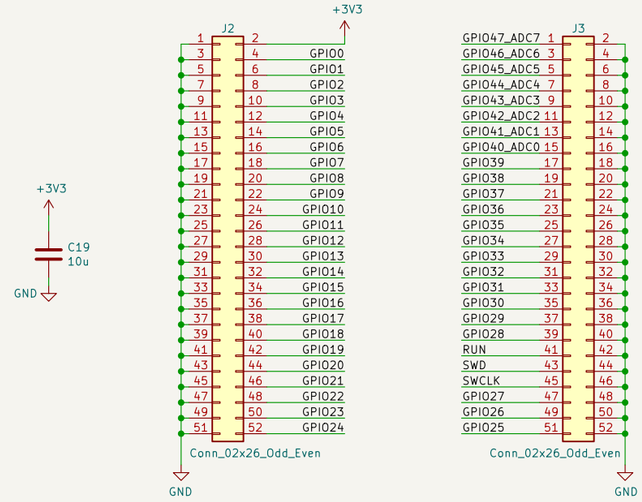

JST Debug Connector





Raspberry Pi Ltd
Sheet: /
File: RP2350_80QFN_minimal.kicad_sch

Title: RP2350B QFN80 Minimal Design Example

Size: A3	Date: 2024-01-03	Rev: REV2
KiCad E.D.A. 10.0.4		Id: 1/1