

- Final Project
 - Final Project Proposal
 - 1. Abstract
 - 2. Motivation
 - 3. System Block Diagram
 - 4. Design Sketches
 - Blaster
 - Vest
 - Manufacturing
 - 5. Software Requirements Specification (SRS)
 - 6. Hardware Requirements Specification (HRS)
 - 7. Bill of Materials (BOM)
 - 8. Final Demo Goals
 - Constraints
 - 9. Sprint Planning
 - Sprint Review #1
 - Last week's progress
 - Current state of project
 - Next week's plan
 - Sprint Review #2
 - Last week's progress
 - Blaster (MCU 1)
 - Vest (MCU 2)
 - Current state of project
 - Next week's plan
 - MVP Demo
 - 1. Block Diagram:
 - 2. Explain your firmware implementation, including application logic and critical drivers you've written.
 - 3. Demo your device.
 - 4. Have you achieved some or all of your Software Requirements Specification (SRS)?
 - 5. Have you achieved some or all of your Hardware Requirements Specification (HRS)?
 - 6. Show off the remaining elements that will make your project whole: mechanical casework, supporting graphical user interface (GUI), web portal, etc.

- 7. What is the riskiest part remaining of your project?
- Final Report
- 1. Video
 - 2. Images
 - 3. Results
 - 3.1 Software Requirements Specification (SRS) Results
 - 3.2 Hardware Requirements Specification (HRS) Results
 - 4. Conclusion
- References

 Review the assignment due date

Final Project

Team Number: T2

Team Name:

Team Member Name	Email Address
Marko Mijatovic	markomij@seas.upenn.edu
Devan Malik	devmalik@seas.upenn.edu
Kim Huang	huangkim@seas.upenn.edu
Victor Wanjohi	vwanjohi@seas.upenn.edu

GitHub Repository URL: <https://github.com/upenn-embedded/final-project-s26-t2>

GitHub Pages Website URL: [for final submission]

Final Project Proposal

1. Abstract


This project is a self-contained infrared laser tag system built around two ATmega328PB microcontrollers running bare-metal C. The system consists of a handheld blaster that

transmits coded IR packets, a wearable vest that detects and validates hits with audiovisual feedback, and a Bluetooth-linked web application that serves as a referee console for match control and live scoring. The blaster features an LCD display (SPI) for ammo tracking, an MPU6050 accelerometer (I2C) enabling a shake-to-reload gesture, and sound effects via a piezo buzzer. The vest uses multiple IR receivers for coverage, RGB LEDs for hit and health feedback, and communicates match state to the web app over BLE. Together, the system enables a full match loop: start, play, elimination, winner declaration, and reset.

2. Motivation

Laser tag is a proven recreational concept, but commercial systems are expensive, proprietary, and offer no insight into the engineering behind them. This project recreates a fully functional laser tag experience from scratch using embedded systems principles, providing a hands-on application of IR communication, real-time firmware state machines, serial peripherals, and wireless connectivity. The project is interesting because it integrates multiple complex subsystems (shooting, hit detection, game logic, wireless comms, and a user-facing web interface) into a single playable product. The intended purpose is a two-player laser tag demo that can run a complete match cycle in under two minutes, showcasing real-time embedded system design at the ESE 3500 final demo day.

3. System Block Diagram

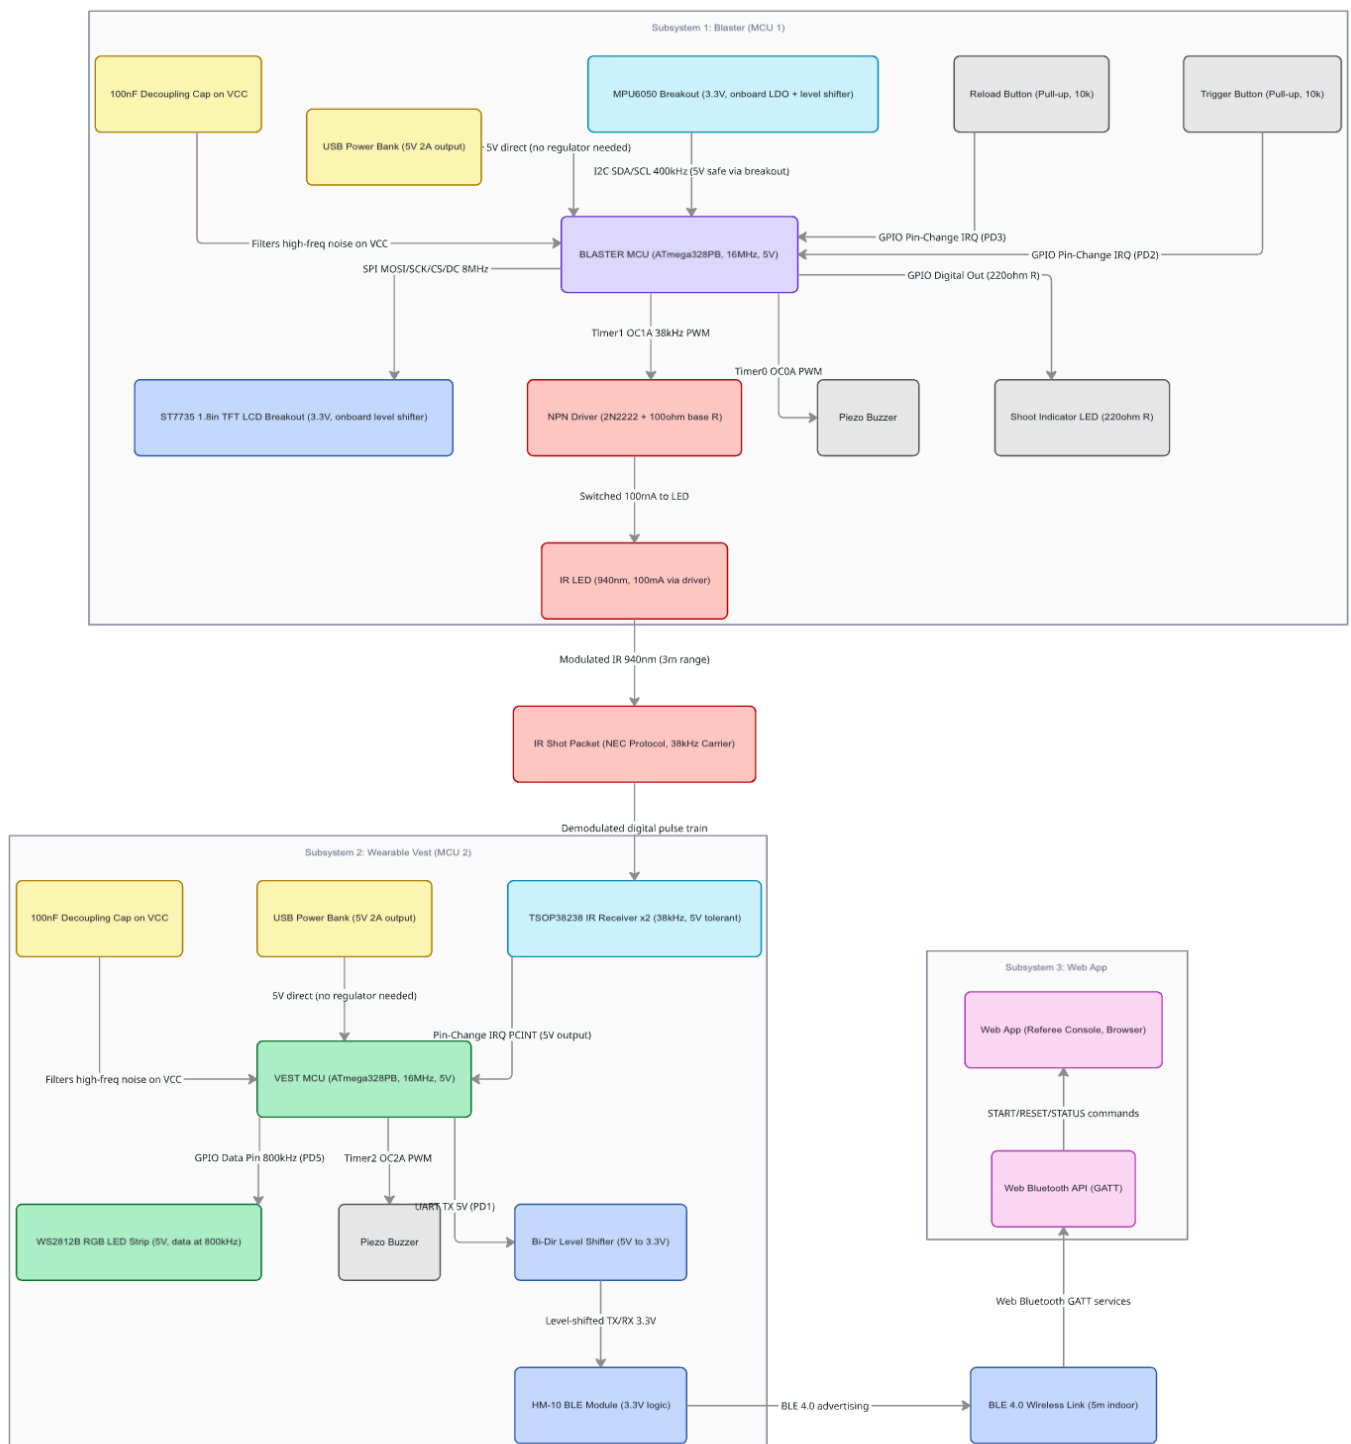

The system is composed of three subsystems communicating through IR and BLE:

Blaster (MCU 1 — ATmega328PB): Trigger and reload buttons (GPIO with internal pull-ups and pin-change interrupts), IR LED emitter driven through an NPN transistor (2N2222) switching 100 mA, modulated at 38 kHz via Timer1 output compare, SPI-driven ST7735 LCD breakout (128x160, onboard 3.3V level shifter), MPU6050 IMU breakout over I2C at 400 kHz (onboard LDO and level shifter for 5V-safe operation), piezo buzzer (Timer0 PWM), and a shoot-indicator LED with 220-ohm current-limiting resistor. Powered by a USB power bank providing 5V directly (no voltage regulator needed). 100 nF decoupling capacitors on MCU VCC pins.

Vest (MCU 2 — ATmega328PB): Two TSOP38238 IR receivers (5V-tolerant output, connected via pin-change interrupts for hit detection), WS2812B RGB LED strip (5V, 800 kHz data line), piezo buzzer (Timer2 PWM), and an HM-10 BLE module (3.3V logic) connected through a bidirectional logic level shifter on UART TX/RX lines at 9600 baud. The vest MCU runs game state logic (health tracking, invulnerability windows, elimination detection) and reports status to the web app via BLE. Powered by a USB power bank providing 5V directly. 100 nF decoupling capacitors on MCU VCC pins.

Web App (Referee Console): A browser-based application using the Web Bluetooth API that connects to the vest's BLE module. Provides match start/reset commands and displays live player health, ammo (relayed), hit events, and winner/loser at match end.

Communication Protocols

IR (Gun → Vest): 38 kHz modulated carrier with NEC-style packet encoding (preamble + shooter ID + team ID + CRC)

SPI (MCU 1 → LCD): ST7735 display driven over hardware SPI

I2C (MCU 1 → MPU6050): Accelerometer/gyroscope for shake-to-reload gesture detection on the blaster

UART (MCU 2 → HM-10 BLE): Serial link at 9600 baud through a bidirectional 5V/3.3V logic level shifter

GPIO + Interrupts: Button inputs (trigger, reload), IR receiver hit detection via pin-change interrupts

Topics Covered

Timers: PWM for IR carrier generation (38 kHz), buzzer tones, and LED brightness/patterns


Interrupts: Button debouncing, IR receiver packet detection, timer overflow for game timing

Serial Communication (SPI + I2C + UART): LCD display over SPI, MPU6050 accelerometer over I2C, BLE module over UART (satisfies I2C/SPI requirement with both protocols)

(Advanced) Wireless Communication: IR shot protocol design + BLE connectivity for remote match control


4. Design Sketches

Blaster

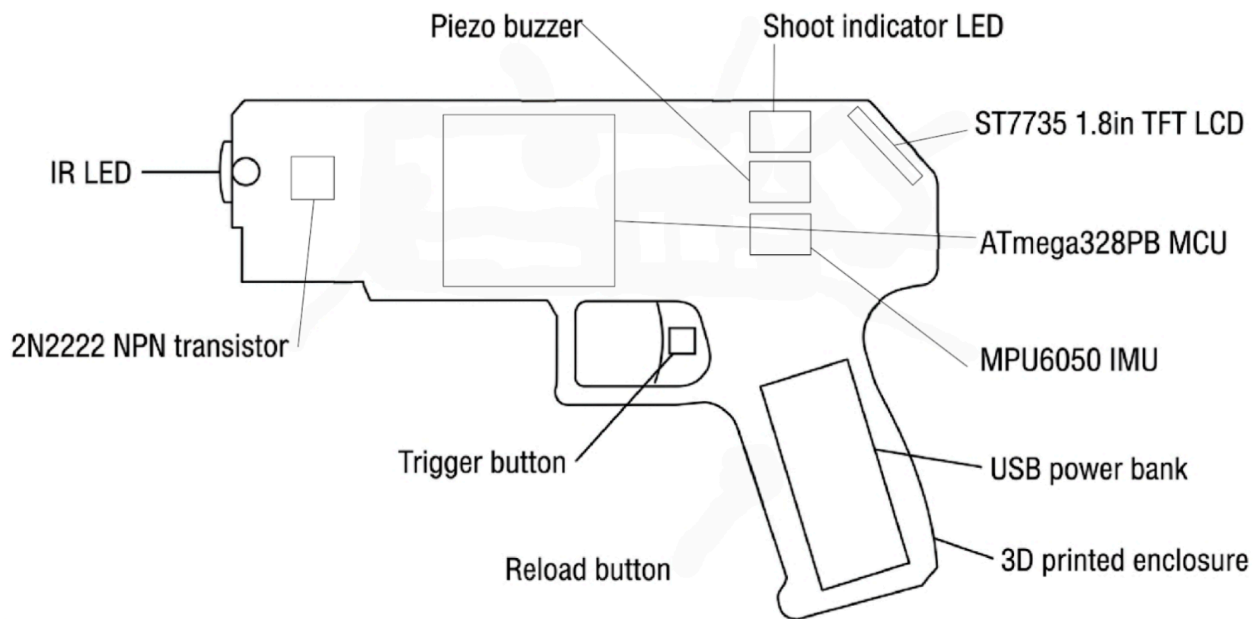


Handheld enclosure (3D printed or laser-cut) housing the ATmega328PB on perfboard, IR LED at the barrel tip driven by a 2N2222 NPN transistor, trigger and reload buttons on the grip, an ST7735 LCD breakout on the back face visible to the shooter, an MPU6050 IMU breakout mounted inside for shake-to-reload detection, a piezo buzzer, and a shoot-indicator LED. Powered by a USB power bank (5V direct, no regulator needed). Decoupling capacitors on all IC power pins.

Vest

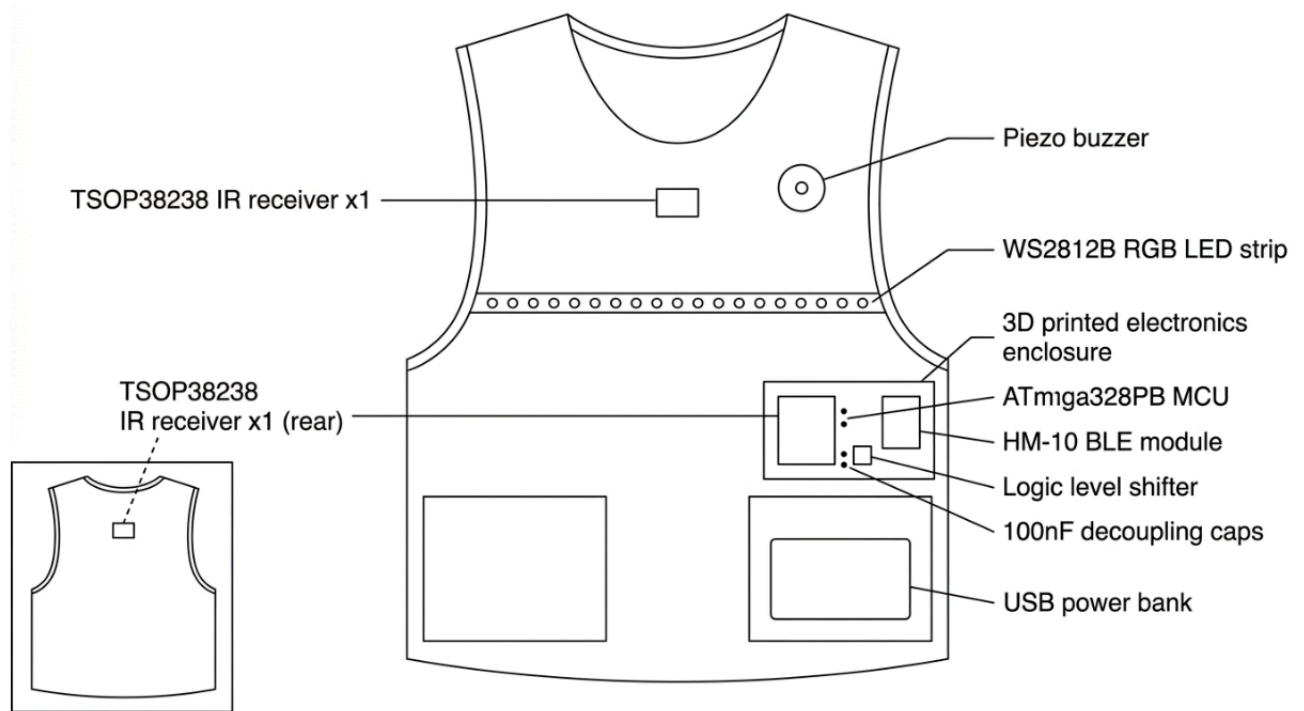

A fabric vest or harness with 3D-printed/laser-cut mounting points for two IR receivers (front and back), WS2812B RGB LEDs for hit feedback visible to other players, a piezo buzzer for audio cues, and a small enclosure for the ATmega328PB, bidirectional level shifter, and HM-10 BLE module. Powered by a USB power bank (5V direct).

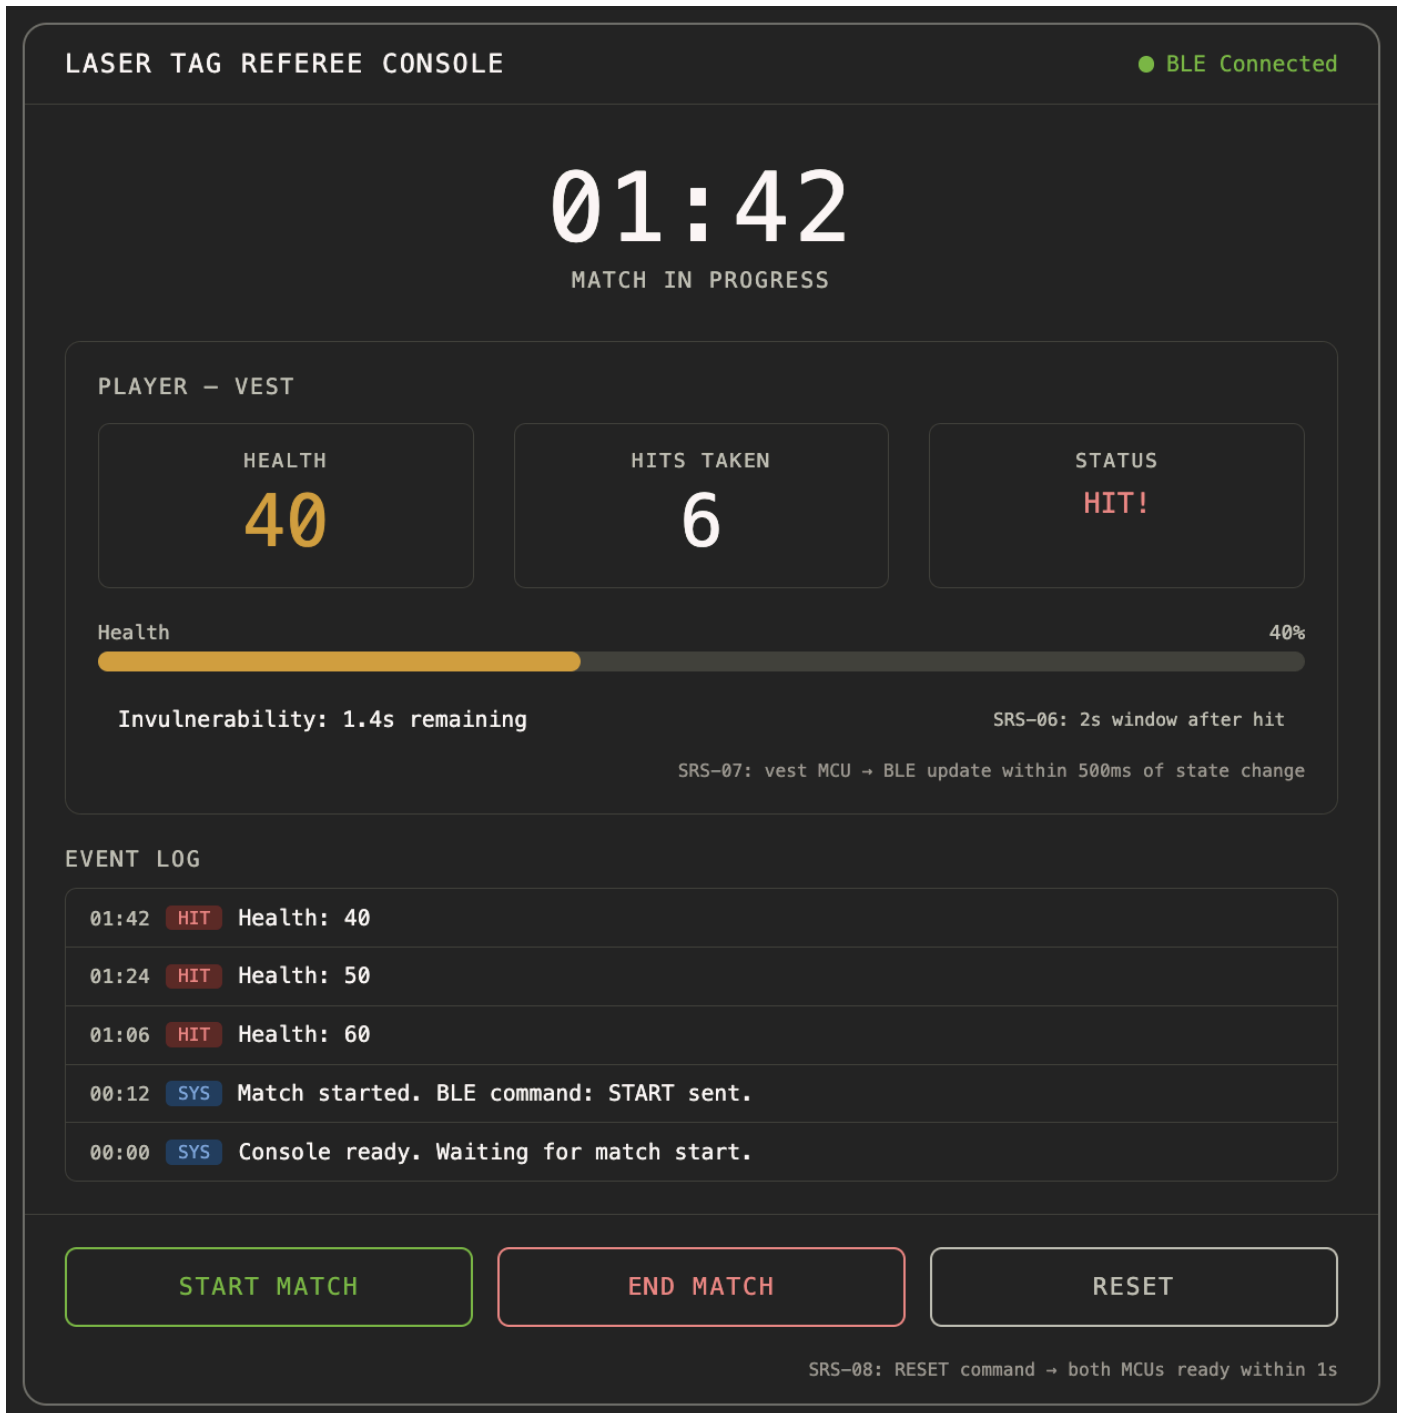

Manufacturing

3D printing (Tangen Hall / RPL): blaster enclosure, vest sensor mounts

Laser cutting (RPL): potential flat panels for enclosure sides, vest backing plate

5. Software Requirements Specification (SRS)

5.1 Definitions, Abbreviations

IR: Infrared. BLE: Bluetooth Low Energy. CRC: Cyclic Redundancy Check. PWM: Pulse Width Modulation. SPI: Serial Peripheral Interface. I2C: Inter-Integrated Circuit. UART:

Universal Asynchronous Receiver-Transmitter. IMU: Inertial Measurement Unit. HRS: Hardware Requirements Specification. LCD: Liquid Crystal Display. MCU: Microcontroller Unit.e

5.2 Functionality

ID	Description
SRS-01	The blaster firmware shall transmit a valid IR shot packet within 50 ms of a trigger press, containing a preamble, shooter ID (4 bits), team ID (2 bits), and CRC-8 checksum.
SRS-02	The blaster firmware shall enforce a minimum inter-shot interval of 500 ms (± 50 ms) to prevent shot spamming, blocking trigger input during the cooldown period.
SRS-03	The blaster firmware shall decrement the ammo counter on each valid shot and block firing when ammo reaches zero. The LCD shall update the displayed ammo count within 100 ms of a shot.
SRS-04	The reload mechanic shall support two modes: (a) a continuous 10-second (± 0.5 s) button hold, or (b) a shake-to-reload gesture detected by the MPU6050 (see SRS-09). For button reload, releasing early shall cancel the attempt. Successful reload via either method shall reset ammo to the maximum value.
SRS-05	The vest firmware shall validate incoming IR packets by checking carrier frequency presence, correct packet framing, and CRC integrity. Invalid packets shall be discarded without affecting game state.
SRS-06	Upon a valid hit, the vest firmware shall enforce an invulnerability window of 2 seconds (± 200 ms) during which additional hits are ignored, preventing double-counting from a single shot burst.
SRS-07	The vest firmware shall transmit updated player status (health, eliminated flag) to the BLE module via UART within 500 ms of any game state change (hit received, elimination, reset).
SRS-08	Upon receiving a RESET command from the web app via BLE, both MCUs shall return to their initial ready state (full health, full ammo, ALIVE status) within 1 second.
SRS-09	The blaster firmware shall read the MPU6050 accelerometer via I2C at a minimum rate of 20 Hz and detect a shake-to-reload gesture when

ID	Description
	acceleration exceeds 2g on any axis for at least 3 consecutive samples. The gesture shall initiate the reload sequence as an alternative to the button hold.

6. Hardware Requirements Specification (HRS)

6.1 Definitions, Abbreviations

FOV: Field of View. dB: Decibels. SNR: Signal-to-Noise Ratio. PCB: Printed Circuit Board. LDO: Low Dropout Regulator. NPN: Negative-Positive-Negative (transistor type). BSS138: N-channel MOSFET used in level shifter circuits.

6.2 Functionality

ID	Description
HRS-01	The IR emitter circuit shall use an NPN transistor (2N2222 or equivalent) to drive a 940 nm IR LED at 100 mA, producing a 38 kHz (± 1 kHz) modulated carrier signal detectable by a TSOP38238 receiver at a minimum range of 3 meters in indoor ambient lighting conditions.
HRS-02	The vest shall incorporate a minimum of two IR receiver modules (TSOP38238 or equivalent) providing front and rear hit detection coverage.
HRS-03	The LCD display (ST7735 or equivalent, minimum 128x128 pixels, SPI interface) shall be visible to the player under normal indoor lighting and update at a minimum refresh rate of 5 fps for game state information.
HRS-04	The HM-10 BLE module (3.3V logic) shall connect to the vest MCU (5V logic) through a bidirectional logic level shifter on UART TX/RX lines at 9600 baud, and sustain a BLE link to the web app at distances up to 5 meters indoors. 7. Bill of Materials (BOM)
HRS-05	The piezo buzzers on both the blaster and vest shall produce audible feedback at a minimum of 65 dB at 30 cm distance, with distinct tones for shot fired, hit received, elimination, and reload complete events. HRS-06 HRS-06****HRS-06
HRS-06	The blaster and vest shall each be powered by USB power banks providing 5V directly, with a minimum capacity of 5000 mAh supporting at least 60

ID	Description
	minutes of continuous gameplay without requiring a recharge.
HRS-07	Each ATmega328PB shall operate at 16 MHz with a 5V supply from the USB power bank. Each MCU VCC pin shall have a 100 nF ceramic decoupling capacitor to filter high-frequency noise. Total system current draw per subsystem shall not exceed 500 mA.
HRS-08	The LED feedback system on the vest shall provide visually distinct patterns for hit (flash), low health (pulsing), and eliminated (solid or rapid flash) states, visible from at least 2 meters in normal indoor lighting.
HRS-09	The MPU6050 IMU shall be mounted rigidly inside the blaster enclosure and communicate with the ATmega328PB over I2C at 400 kHz. The accelerometer shall be configured for a $\pm 4g$ range with 16-bit resolution.

7. Bill of Materials (BOM)

Component	Part / Model	Qty	Unit Cost	Vendor	Purpose
Microcontroller	ATmega328PB	2	Kit	Lab / Kit	Blaster + Vest MCUs
LCD Display	ST7735 1.8" TFT breakout (SPI, onboard level shifter)	1	~\$10	Adafruit	Blaster ammo display
IMU	MPU6050 breakout (I2C, onboard LDO + level shifter)	1	~\$4	Adafruit	Shake-to-reload gesture
IR Emitter LED	940nm IR LED (5mm)	2	~\$1	Adafruit / DigiKey	Shot transmission
NPN Transistor	2N2222 + 100 Ω base resistor	2	~\$0.50	Lab / DigiKey	IR LED driver (100mA)
IR Receiver	TSOP38238 (38kHz)	3–4	~\$2 ea	Adafruit / DigiKey	Vest hit detection

Component	Part / Model	Qty	Unit Cost	Vendor	Purpose
BLE Module	HM-10 (3.3V UART)	1	~\$6	Amazon / Adafruit	Vest-to-web-app link
Logic Level Shifter	Bi-dir 3.3V/5V (BSS138)	1	~\$4	Adafruit	UART level shift for HM-10
Piezo Buzzer	Passive piezo	2	~\$1 ea	Adafruit / DigiKey	Audio feedback
RGB LEDs	WS2812B strip	1 strip	~\$8	Adafruit	Vest hit/health feedback
Buttons	Tactile pushbuttons	3–4	~\$0.50 ea	Lab / DigiKey	Trigger, reload, reset
USB Power Banks	5V 2A output, 5000mAh+	2	~\$8 ea	Amazon	5V power for each unit
Passives + Misc	100nF caps, 220Ω/100Ω resistors, perfboard, wires	—	~\$10	Lab / Kit	Decoupling, current limiting, assembly

Estimated Total: ~70–90

8. Final Demo Goals

On demo day, the system will be demonstrated as a live two-player laser tag match at a lab station in Detkin Lab. One team member will wear the vest and another will hold the blaster while someone else operates the web app on a laptop as the referee. The demo will follow this sequence:

- Referee starts the match from the web app
- Player fires the blaster at the vest, showing IR hit detection, LCD ammo decrement, and vest LED/buzzer feedback in real time
- Player runs out of ammo and performs the shake-to-reload gesture (or 10-second button hold as fallback)
- Vest player is eliminated (health reaches zero), vest shows elimination feedback, web app declares result

- Referee resets the match from the web app, all devices return to ready state

Constraints

- Demo will be conducted at a single lab station (no outdoor space required)
- IR range of ~3 meters is sufficient for the indoor demo area
- All components are USB power bank powered for portability (no wall outlet dependency)

9. Sprint Planning

Sprint Milestones

Week	Milestone	Key Tasks
Mar 16–22	Parts Ordering + Prototyping	Finalize BOM, order parts, begin breadboard prototyping of IR emitter/receiver pair, set up ATmega328PB dev environments
Mar 23–30	Subsystem Bringup	IR TX/RX communication working, LCD displaying over SPI, BLE module pairing with test web page, buzzer tones verified. Parts ordering meeting with Account Manager.
Mar 30–Apr 3	Sprint 1: Core Firmware	Blaster state machine (ammo, fire, reload), vest state machine (health, hits, invulnerability). IR packet protocol (encode/decode + CRC). Sprint Review #1.
Apr 4– 10	Sprint 2: Integration	Integrate blaster and vest for end-to-end shot-hit cycle. BLE commands from web app controlling game state. Begin mechanical enclosure work. Sprint Review #2.
Apr 11– 17	MVP Demo	All electronics and firmware functional at basic level. Full match loop working (start, shoot, hit, eliminate, reset). Enclosures in progress. MVP Demo on Apr 17.
Apr 18– 24	Polish + Final Demo	Finalize enclosures, polish web app UI, tune IR range/reliability, stress test full system. Final Demo Apr 24.
Apr 25– 27	Final Report	Record demo video, write validation results for SRS/HRS, complete GitHub Pages website. Due Apr 27.

Member	Primary Responsibility	Secondary
Kim	Blaster firmware (state machine, IR TX, LCD driver)	IR protocol co-design
Devan	Vest firmware (hit detection, game logic, BLE UART)	IR protocol co-design
Marko	Web app (BLE integration, match UI, referee controls)	BLE protocol definition, integration testing
Victor	Hardware & mechanical (circuits, power, enclosures, vest)	Integration, soldering, 3D print / laser cut


This is the end of the Project Proposal section. The remaining sections will be filled out based on the milestone schedule.

Sprint Review #1

Last week's progress

Blaster (MCU 1) — Kim & Victor:


- Trigger and reload buttons wired with GPIO and internal pull-ups, confirmed functional on breadboard.
- IR emitter circuit assembled: 940nm IR LED driven through 2N2222 NPN transistor, switching ~100mA off a GPIO-controlled base pin.
- ATmega328PB dev environment set up and running bare-metal C on the blaster MCU.

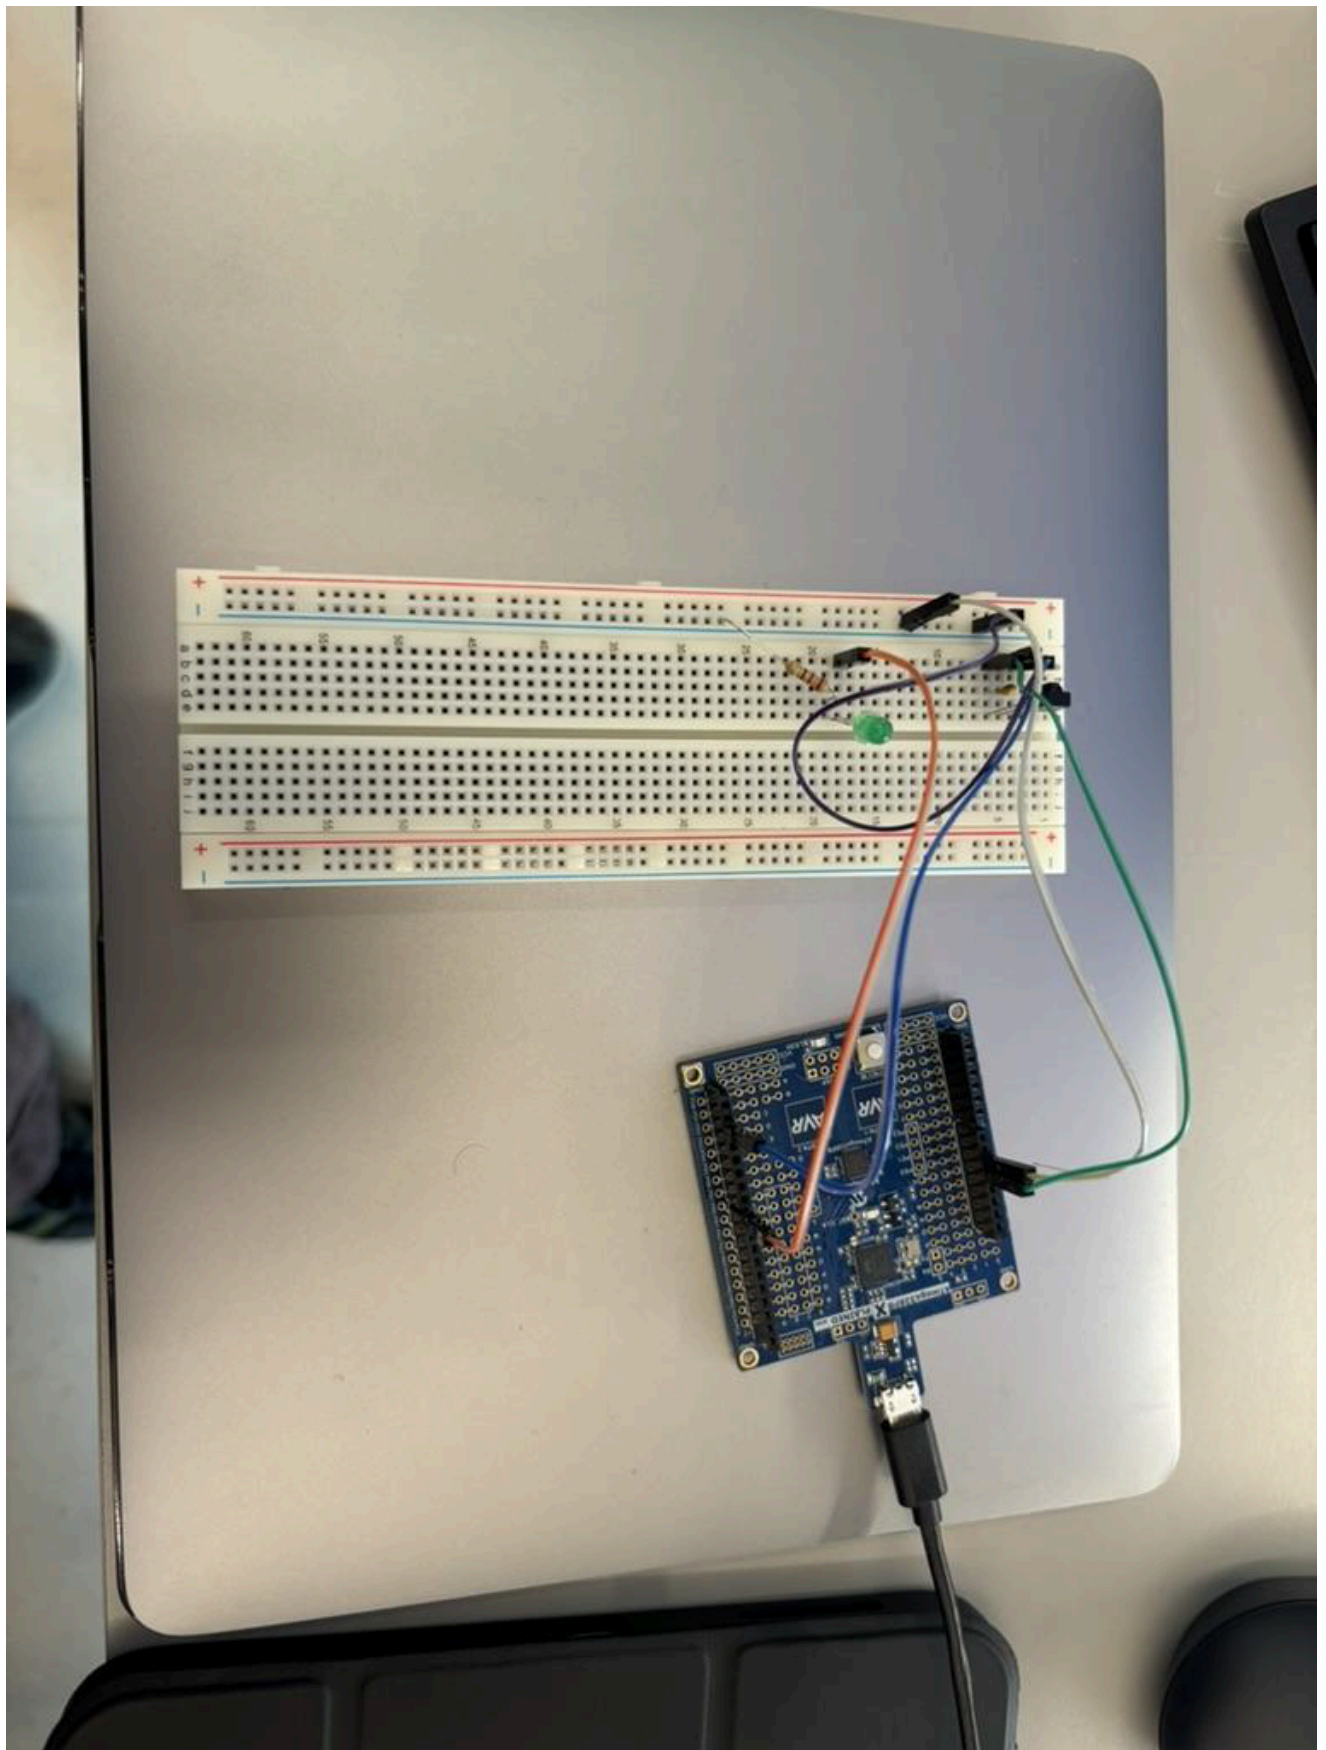

Vest (MCU 2) — Devan & Marko:

- TSOP38238 IR receiver wired with 100nF decoupling cap on VCC (required by datasheet for stable operation). Confirmed it detects 38kHz modulated IR from the blaster emitter.
- Basic hit detection prototype working: LED lights on valid IR detection via pin-change interrupt.

- Vest ATmega328PB brought up on the breadboard.

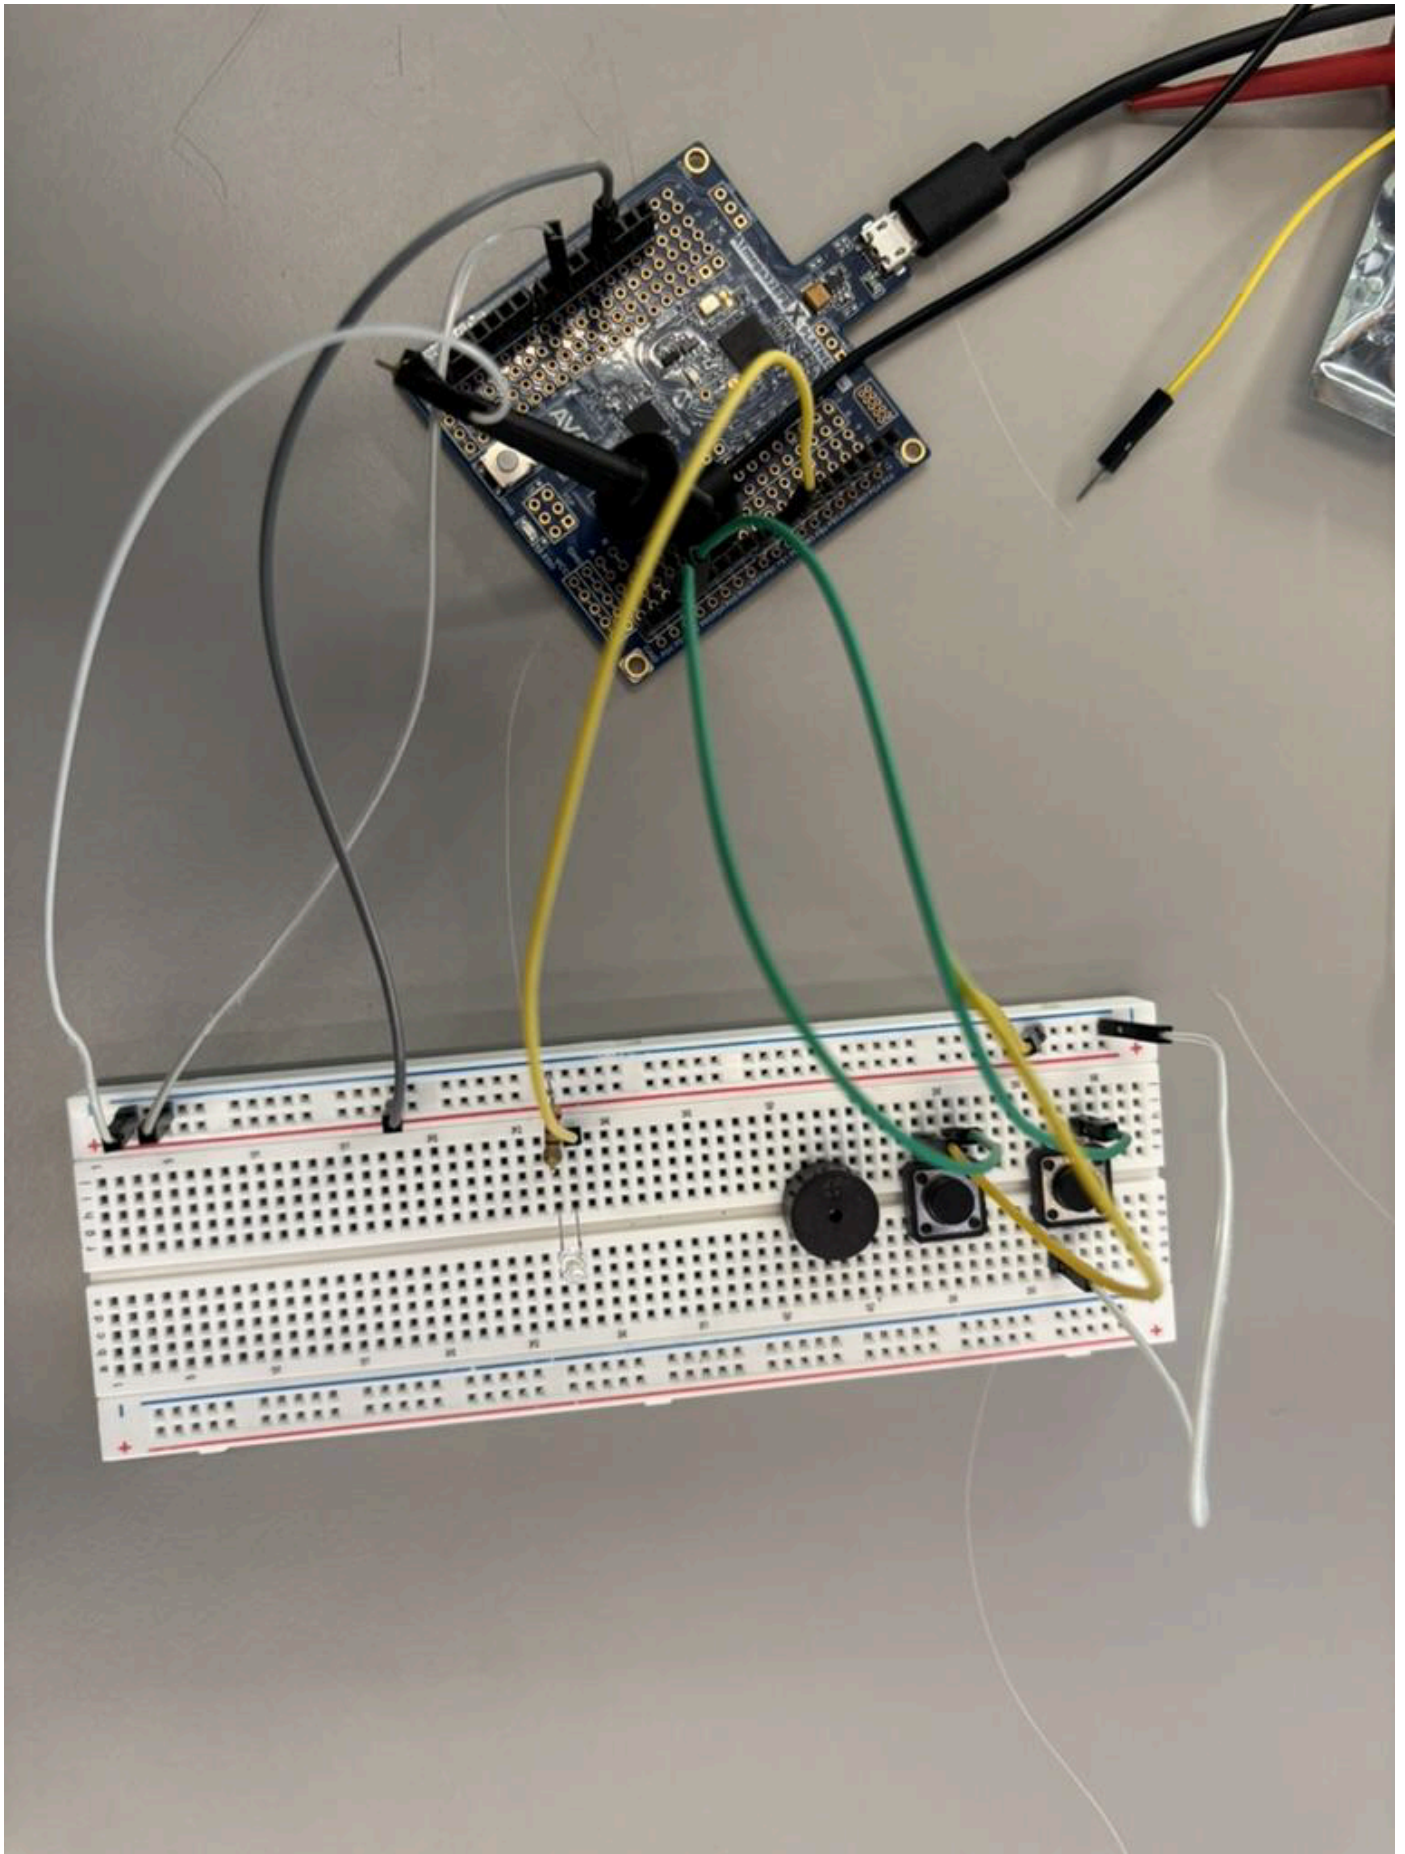

Design Change — BLE → Feather ESP32:

- Pivoted from the HM-10 BLE module to an Adafruit Feather ESP32 for the wireless link between the vest and web app. The Feather gives us Wi-Fi + BLE flexibility and a more mature software ecosystem for the web app side, while still only serving as a comms module (no application logic — all game logic remains on the ATmega328PB per course restrictions).

Current state of project

Core subsystems are individually coming online on breadboards. IR TX → RX link is proven at the physical layer. The BLE-to-Feather pivot is a scope adjustment but doesn't affect the ATmega firmware architecture — the Feather just replaces the HM-10 on the UART lines.

Hardware status: All critical components are in hand (ATmega328PBs, TSOP38238s, IR LEDs, 2N2222s, ST7735 LCD, MPU6050). Feather ESP32 is on hand. No outstanding part orders blocking progress.

Risk: IR packet reliability at 3m range hasn't been tested yet — that's a key validation target for next sprint.

Next week's plan

Task	Time	Owner	Definition of Done
Feather ESP32 + Web App BLE link	2-4 h	Marko	Feather pairs with browser via Web Bluetooth API; can send/receive test strings bidirectionally
ST7735 LCD over SPI	1-2 h	Kim	LCD displays static ammo count on blaster MCU
MPU6050 I2C bringup	1-2 h	Kim/Devan	Read raw accelerometer values over I2C at 400kHz, print to serial
Piezo buzzer tones	10 m	Victor	Timer-driven PWM produces distinct tones for shot/hit/reload events
Migrate to circuit boards	2 h	Victor/Devan/Marko	Blaster and vest circuits soldered on perfboard, off breadboard

Task	Time	Owner	Definition of Done
(perfboard)			

Sprint Review #2

Last week's progress

Blaster (MCU 1)

- Successfully demonstrated reload action sequences to the account manager.

Vest (MCU 2)


- Implemented piezo buzzer overtone generation via timer-driven PWM.
- Source code committed and pushed to the team GitHub repository.
- Successfully demonstrated distinct audio tones for shot, hit, and reload events to the account manager during lab session.
- Feather pairs with browser via Web Bluetooth API; can send/receive test strings bidirectionally

Current state of project

Next week's plan

MVP Demo

1. Block Diagram:

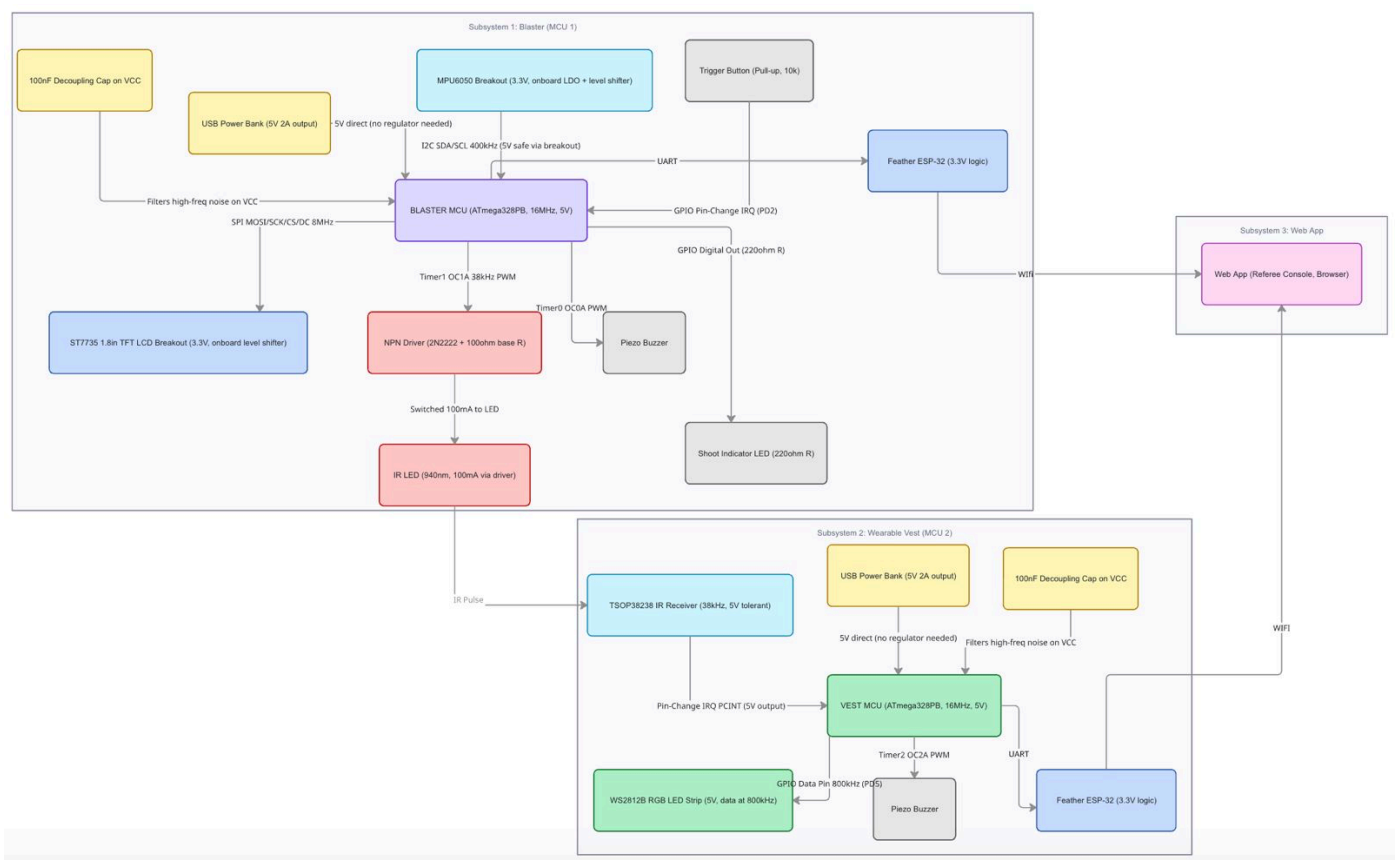

Two ATmega328P MCUs, one handles user input, LCD feedback, and IR transmission; the other detects incoming IR and signals a hit via LED flash.

2. Explain your firmware implementation, including application logic and critical drivers you've written.

We established UART communication between the main MCU and the Feather module, defined a simple message protocol, and enabled remote reset commands and periodic status updates to the web app.

We implemented a state machine to manage gameplay states (idle, firing, hit detection, reload, reset) and non-blocking timing via timers and interrupts to allow concurrent subsystem operation.

At demo, the system was fully playable ,a user could fire the blaster, register hits on the vest, receive feedback, and reset the game through the web interface.

3. Demo your device.

1. Power on → LCD shows **READY**, ammo = 12

2. Pull trigger → LCD shows **FIRED**, ammo decrements
3. Fire until empty → LCD shows **EMPTY**, further triggers blocked
4. Press reload → LCD shows **RELOADING** (1.5s) → resets to **READY**, ammo = 12
5. Fire at receiver → hit LED flashes 200ms

4. Have you achieved some or all of your Software Requirements Specification (SRS)?



Requirement	Status
Display ammo count on startup	Done
Decrement ammo on valid trigger	Done
Block firing at 0 ammo	Done
Show EMPTY when out of ammo	Done
Show RELOADING during reload	Done

5. Have you achieved some or all of your Hardware Requirements Specification (HRS)?

Requirement	Status
IR LED transmitter on PC0	Done
SPI LCD (ST7735) integrated	Done
Trigger button on PD2	Done
Reload button on PD3	Done
TSOP38238 IR receiver on PD2	Done
Hit indicator LED on PB0	Done

6. Show off the remaining elements that will make your project whole: mechanical casework, supporting graphical user interface (GUI), web portal, etc.

- **Mechanical casework** — rectangular blaster housing

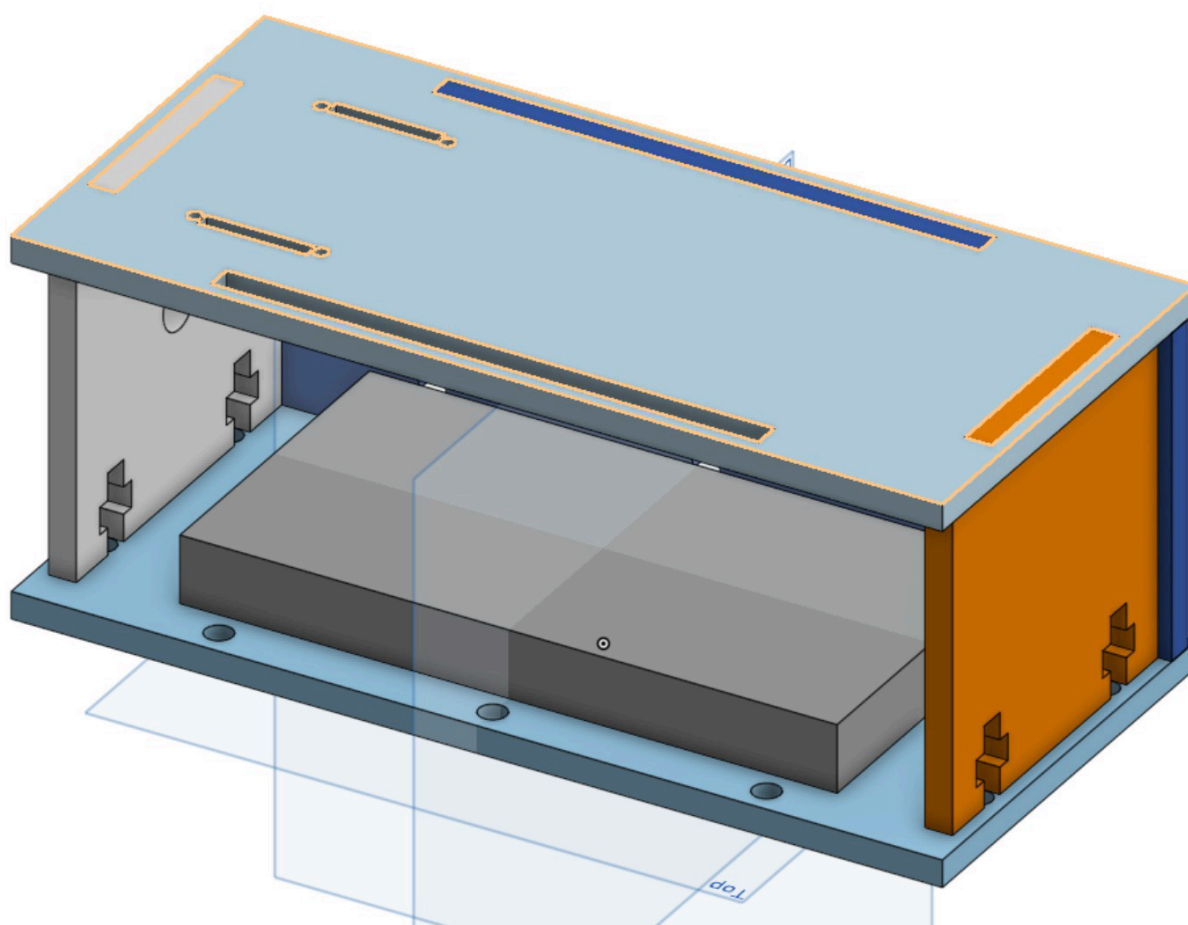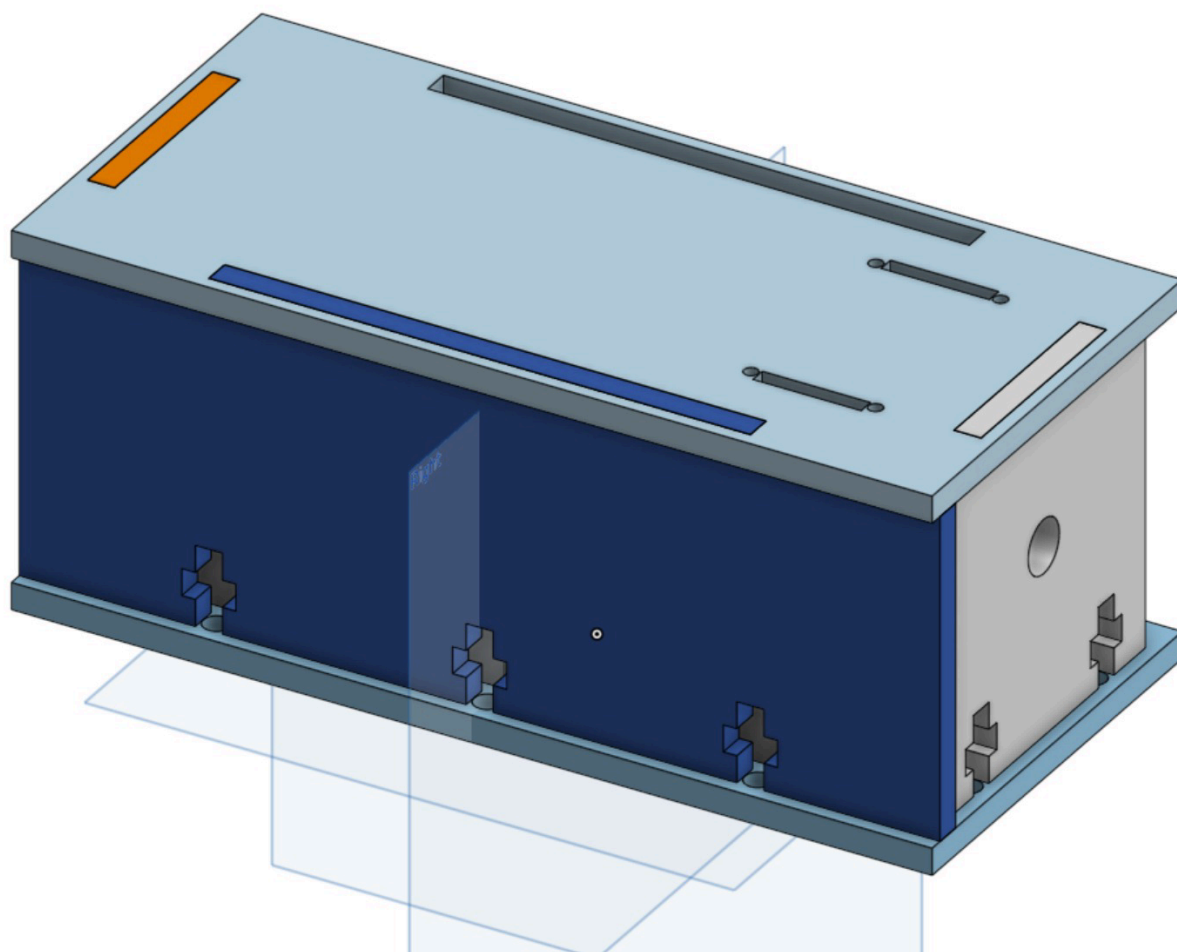

7. What is the riskiest part remaining of your project?

During integration and migrating parts from breadboards to perfboards, some functionality might break down. We expect to solve all bugs in good time.

Final Report


Don't forget to make the GitHub pages public website! If you've never made a GitHub pages website before, you can follow this webpage (though, substitute your final project repository for the GitHub username one in the quickstart guide):


<https://docs.github.com/en/pages/quickstart>


1. Video

https://drive.google.com/drive/folders/1jlbaAgMy6JAKm02dPGXfAoZNbYtTDbEu?usp=drive_link

2. Images

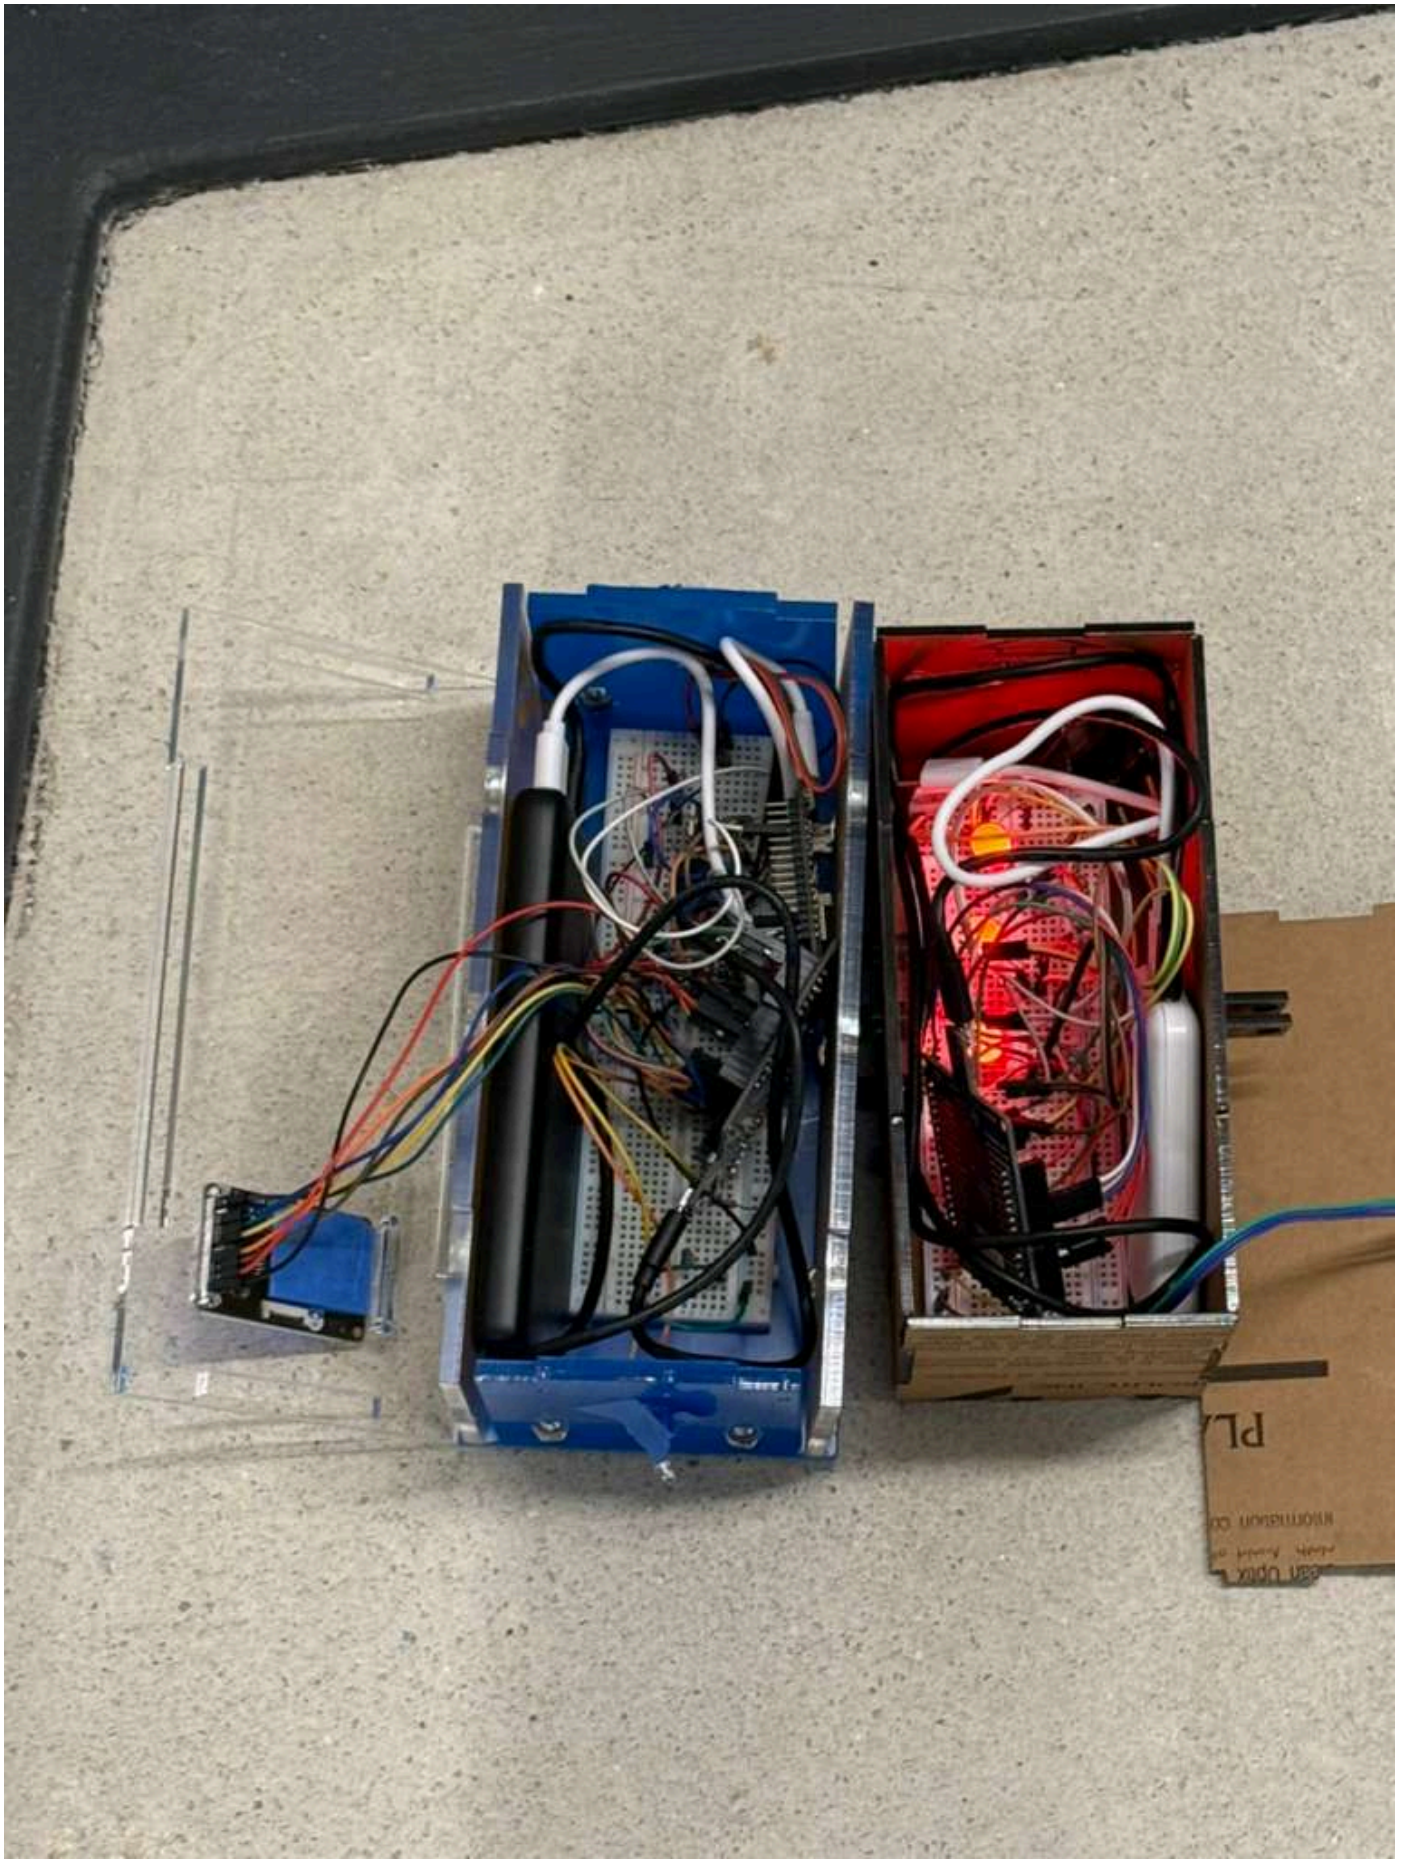

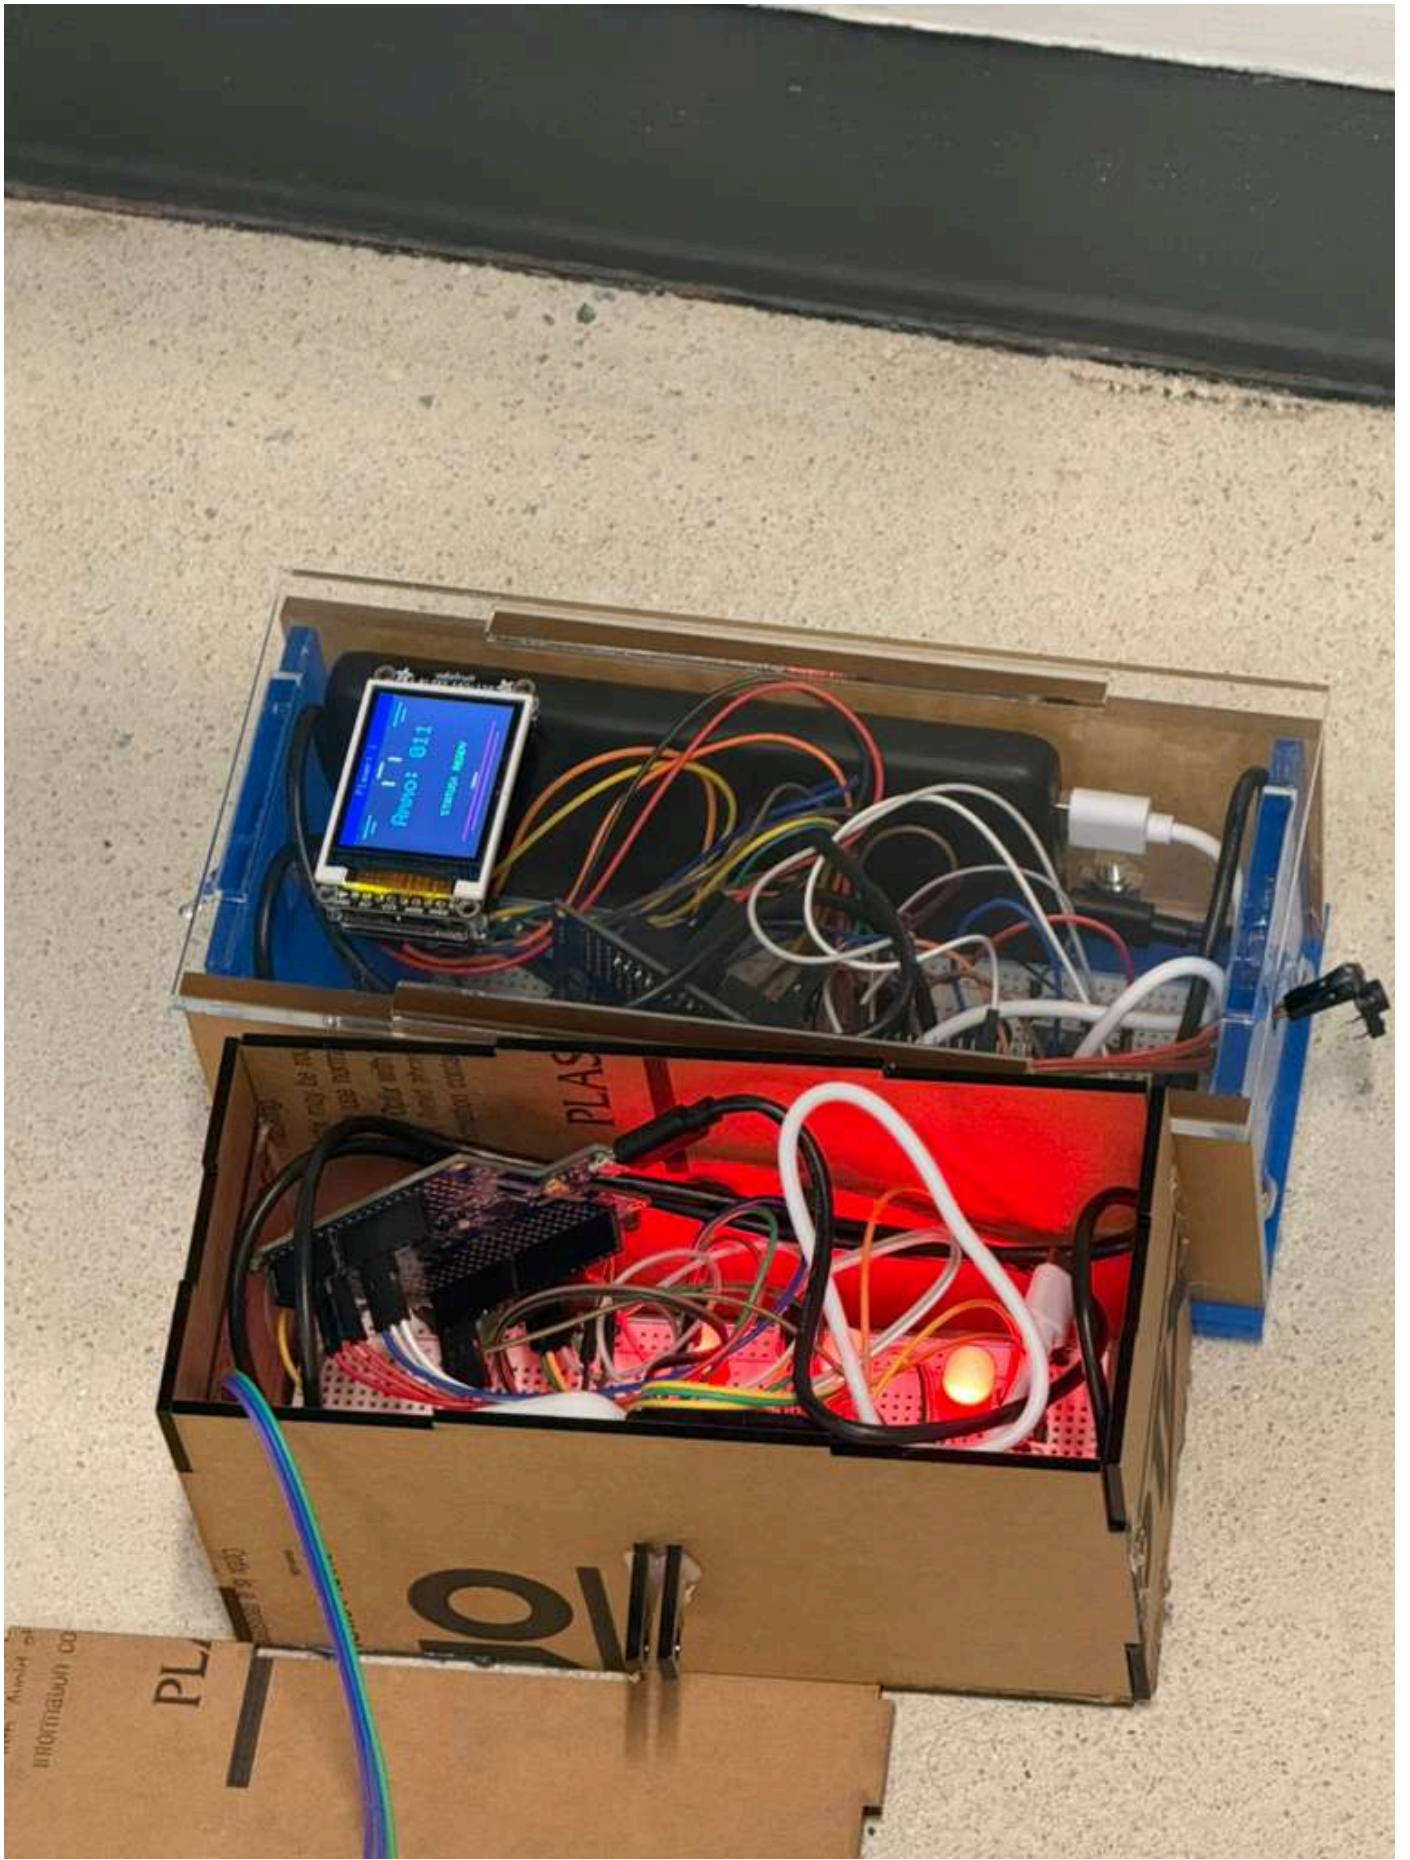

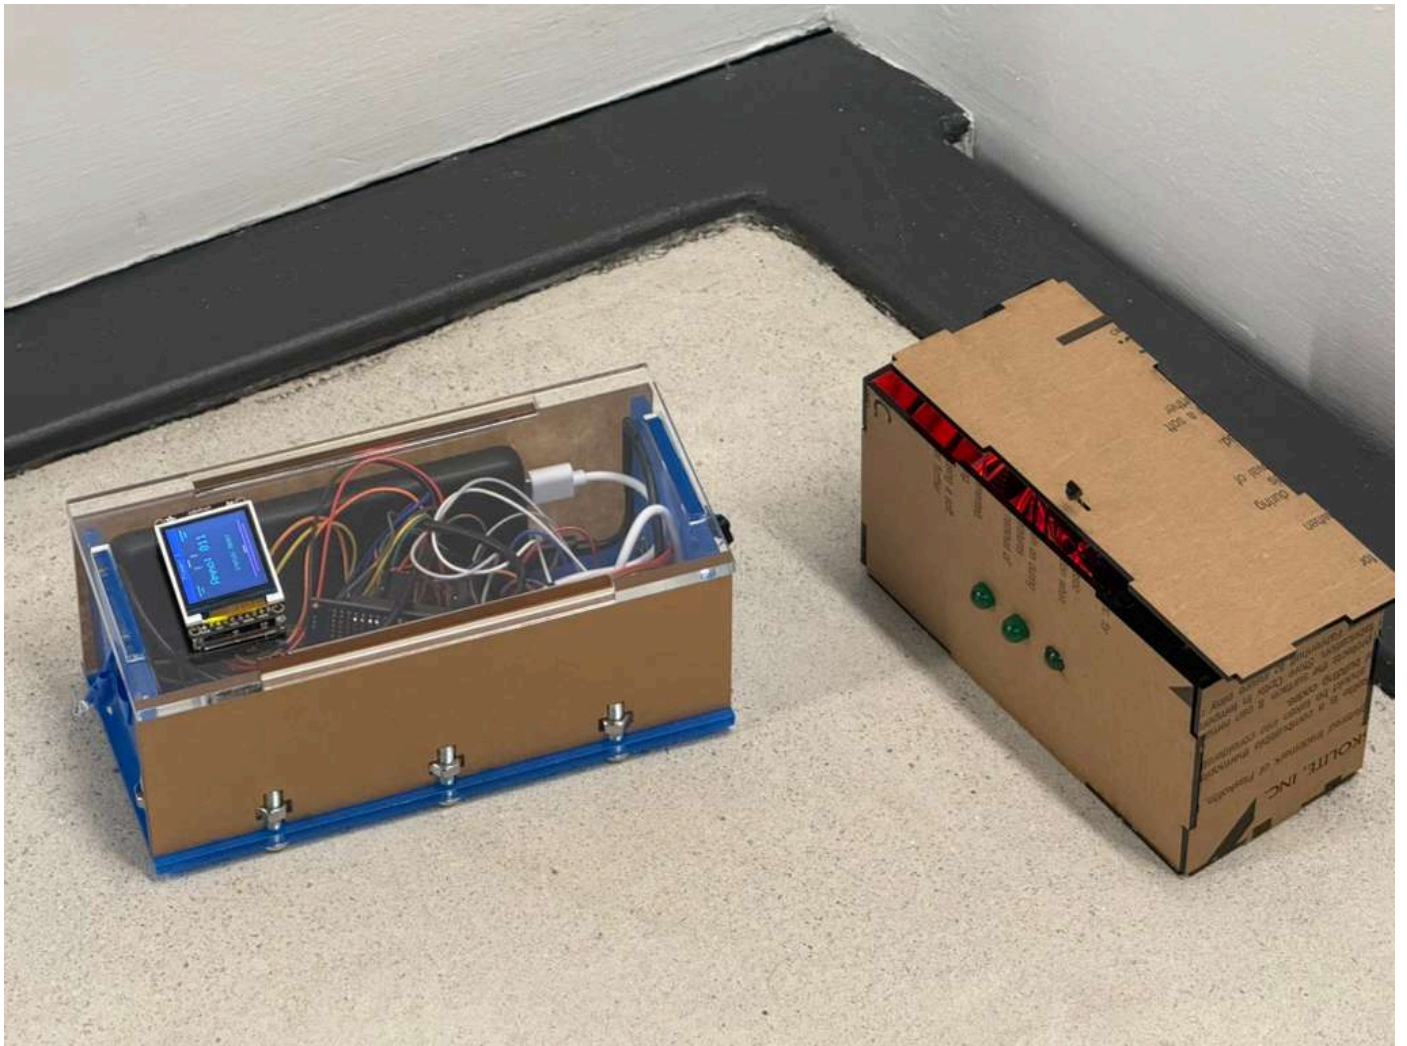

3. Results

3.1 Software Requirements Specification (SRS) Results

ID	Requirement	Validation Method	Status
SRS-01	Blaster transmits a valid IR shot packet within 50 ms of trigger press, including preamble, shooter ID, team ID, and CRC-8.	Oscilloscope / logic analyzer capture of trigger input vs IR output timing. Decode packet structure.	Pending
SRS-02	Blaster enforces 500 ms (± 50 ms) cooldown between shots to prevent spamming.	Press trigger rapidly and measure spacing between IR bursts. Verify blocked shots during cooldown.	Pending
SRS-03	Ammo decrements after each valid shot, blocks firing at zero ammo, LCD updates within 100 ms.	Fire repeatedly while filming LCD. Confirm count decreases, EMPTY state at zero, no shot output at zero ammo.	Pending
SRS-04	Reload supports 10 s hold or shake-to-reload gesture. Early release cancels hold reload. Successful reload restores max ammo.	Time hold button with stopwatch. Test early release. Shake device and verify reload + ammo reset.	Pending
SRS-05	Vest validates IR packets using carrier presence, framing, and CRC. Invalid packets ignored.	Send malformed / noise signals and verify no health loss. Send valid packets and verify hit registers.	Pending
SRS-06	Vest applies 2 s (± 200 ms) invulnerability window after hit.	Fire multiple shots rapidly after first hit. Confirm only first hit counts until timeout expires.	Pending
SRS-07	Vest sends updated health/elimination state to BLE within 500 ms of state change.	Trigger hit and measure delay until console updates.	Pending

ID	Requirement	Validation Method	Status
SRS-08	RESET command returns both MCUs to ready state within 1 s.	Send reset from web app and verify ammo, health, alive state restored within spec.	Pending
SRS-09	MPU6050 sampled at ≥ 20 Hz. Shake detected when $> 2g$ on any axis for 3 consecutive samples.	Log accelerometer timestamps and values. Verify reload triggers only when threshold met.	Pending

3.2 Hardware Requirements Specification (HRS) Results

ID	Requirement	Validation Method	Status
HRS-01	IR emitter uses transistor-driven 940 nm LED at 100 mA, 38 kHz (± 1 kHz), detectable at ≥ 3 m indoors.	Scope PWM frequency, measure current, range test at 3 m.	Pending
HRS-02	Vest includes at least two IR receivers for front/rear coverage.	Visual inspection + hit tests from front and rear angles.	Pending
HRS-03	LCD (ST7735 or equivalent) visible indoors and updates at ≥ 5 fps.	Visual inspection + timed refresh test while changing ammo/status.	Pending
HRS-04	HM-10 BLE uses bidirectional level shifter at 9600 baud and maintains link up to 5 m indoors.	UART serial verification + connection/range walk test.	Pending
HRS-05	Piezo buzzers produce ≥ 65 dB at 30 cm with distinct tones for shot, hit, elimination, reload.	SPL meter / phone app + listen test for distinct events.	Pending
HRS-06	Each subsystem powered by 5 V USB bank, ≥ 5000 mAh, supports ≥ 60 min gameplay.	Battery label inspection + runtime test.	Pending
HRS-07	Each ATmega328PB runs at 16 MHz, 5 V, has 100 nF decoupling caps, subsystem current < 500 mA.	Inspect hardware + measure supply voltage/current draw.	Pending

ID	Requirement	Validation Method	Status
HRS-08	Vest LEDs show distinct hit, low-health, and eliminated states visible from ≥ 2 m indoors.	Functional visual test at 2 m distance.	Pending
HRS-09	MPU6050 mounted rigidly, communicates over I2C at 400 kHz, $\pm 4g$ 16-bit mode configured.	Inspect mounting + verify register config / bus timing.	Pending

4. Conclusion

References