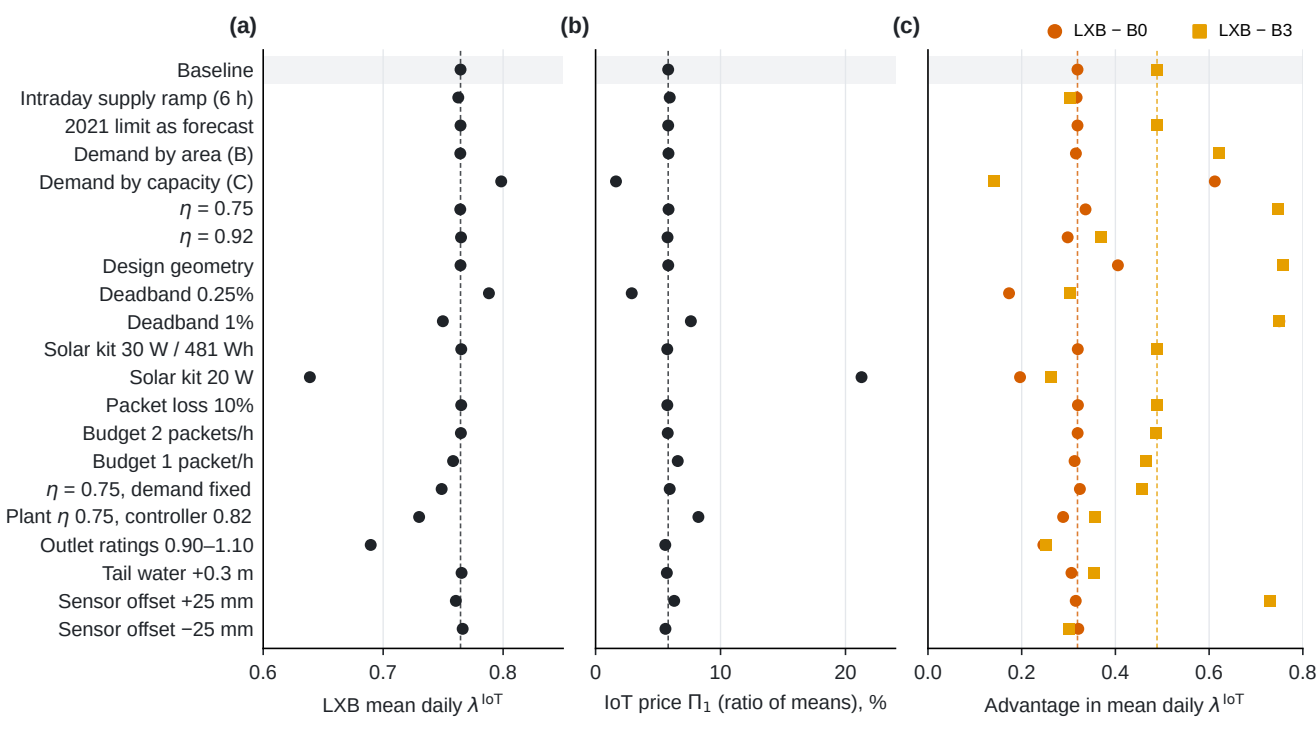
(a)
(b)
(c)
LXB − B0
LXB − B3
Baseline
Intraday supply ramp (6 h)
2021 limit as forecast
Demand by area (B)
Demand by capacity (C)
η = 0.75
η = 0.92
Design geometry
Deadband 0.25%
Deadband 1%
Solar kit 30 W / 481 Wh
Solar kit 20 W
Packet loss 10%
Budget 2 packets/h
Budget 1 packet/h
η = 0.75, demand fixed
Plant η 0.75, controller 0.82
Outlet ratings 0.90–1.10
Tail water +0.3 m
Sensor offset +25 mm
Sensor offset −25 mm
0.6
0.7
0.8
LXB mean daily λ IoT
0
10
20
IoT price Π1 (ratio of means), %
0.0
0.2
0.4
0.6
0.8
Advantage in mean daily λ IoT