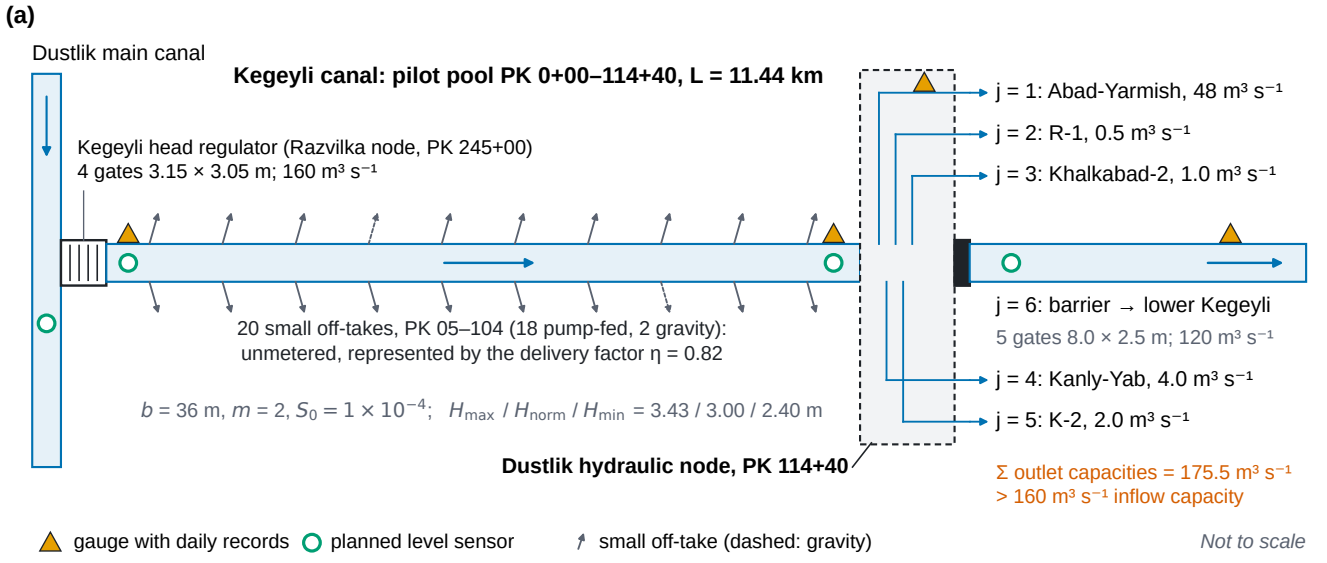
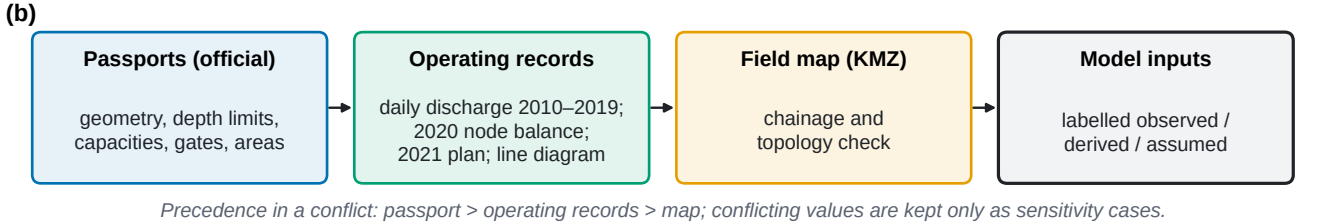

(a)
Dustlik main canal
Kegeyli canal: pilot pool PK 0+00–114+40, L = 11.44 km
Kegeyli head regulator (Razvilka node, PK 245+00)
4 gates 3.15 × 3.05 m; 160 m³ s⁻¹
20 small off-takes, PK 05–104 (18 pump-fed, 2 gravity):
unmetered, represented by the delivery factor η = 0.82
b = 36 m, m = 2, S0 = 1 × 10⁻⁴; Hmax / Hnorm / Hmin = 3.43 / 3.00 / 2.40 m
Dustlik hydraulic node, PK 114+40
j = 1: Abad-Yarmish, 48 m³ s⁻¹
j = 2: R-1, 0.5 m³ s⁻¹
j = 3: Khalkabad-2, 1.0 m³ s⁻¹
j = 6: barrier → lower Kegeyli
5 gates 8.0 × 2.5 m; 120 m³ s⁻¹
j = 4: Kanly-Yab, 4.0 m³ s⁻¹
j = 5: K-2, 2.0 m³ s⁻¹
Σ outlet capacities = 175.5 m³ s⁻¹
> 160 m³ s⁻¹ inflow capacity
gauge with daily records
planned level sensor
small off-take (dashed: gravity)
Not to scale


(b)
Passports (official)
geometry, depth limits, capacities, gates, areas
Operating records
daily discharge 2010–2019; 2020 node balance; 2021 plan; line diagram
Field map (KMZ)
chainage and topology check
Model inputs
labelled observed / derived / assumed
Precedence in a conflict: passport > operating records > map; conflicting values are kept only as sensitivity cases.