



ATLAS ASCENSEURS



CATALOGUE ASTORIA HYDRAULIQUEE.PDF

ADDRESS: TWIN CENTER, CORNER OF BOULEVARD ZERKTOUNI AND AL MASSIRA,
5TH AND 6TH FLOORS, CASABLANCA, 20100 | CONTACT@ATLASASCENSEURS.MA



Table of CONTENTS

01-10

Hydraulic Home Lift

11-14

Standard Configuration

15-19

Optional Configuration

20-24

Basic Information

Hydraulic Home Lift

Focus On Home Elevators

Hydraulic Home Lift



HYDRAULIC HOME LIFT

Make your living more comfortable



Hydraulic home lift can be installed without pit and without shaft, it's the most suitable model for small installation space, we have many different designs to match with your house decoration.



Small Installation Space



Decor Can Be Customized



Multiple Security Mechanisms



Small Installation Space



$\geq 1\text{m}^2$
LW1000*LD1000

$\geq 2.2\text{m}$
Top floor height

Hydraulic home lift can be installed without pit and without shaft, it's the most suitable model for small installation space, we have many different designs to match with your house decoration.



Multiple Security Mechanisms



High quality component

We are committed to providing our customers with safe and reliable hydraulic elevators. We insist on selecting high-quality accessories and materials, ensuring that each elevator undergoes rigorous testing and quality control to meet your needs and expectations.




Super Silence Pump Station

This model has the advantages of high efficiency and stability, energy saving and environmental protection, silence and durability, and convenient operation and maintenance. It ensures the safe operation and riding comfort of the elevator.



Hot galvanizing structure


The hot galvanizing structure of the elevator has the advantages of strong anti-corrosion, strong durability, stable quality and good aesthetics, which enables the elevator to maintain a long life under various environmental conditions while improving its appearance quality and performance stability.

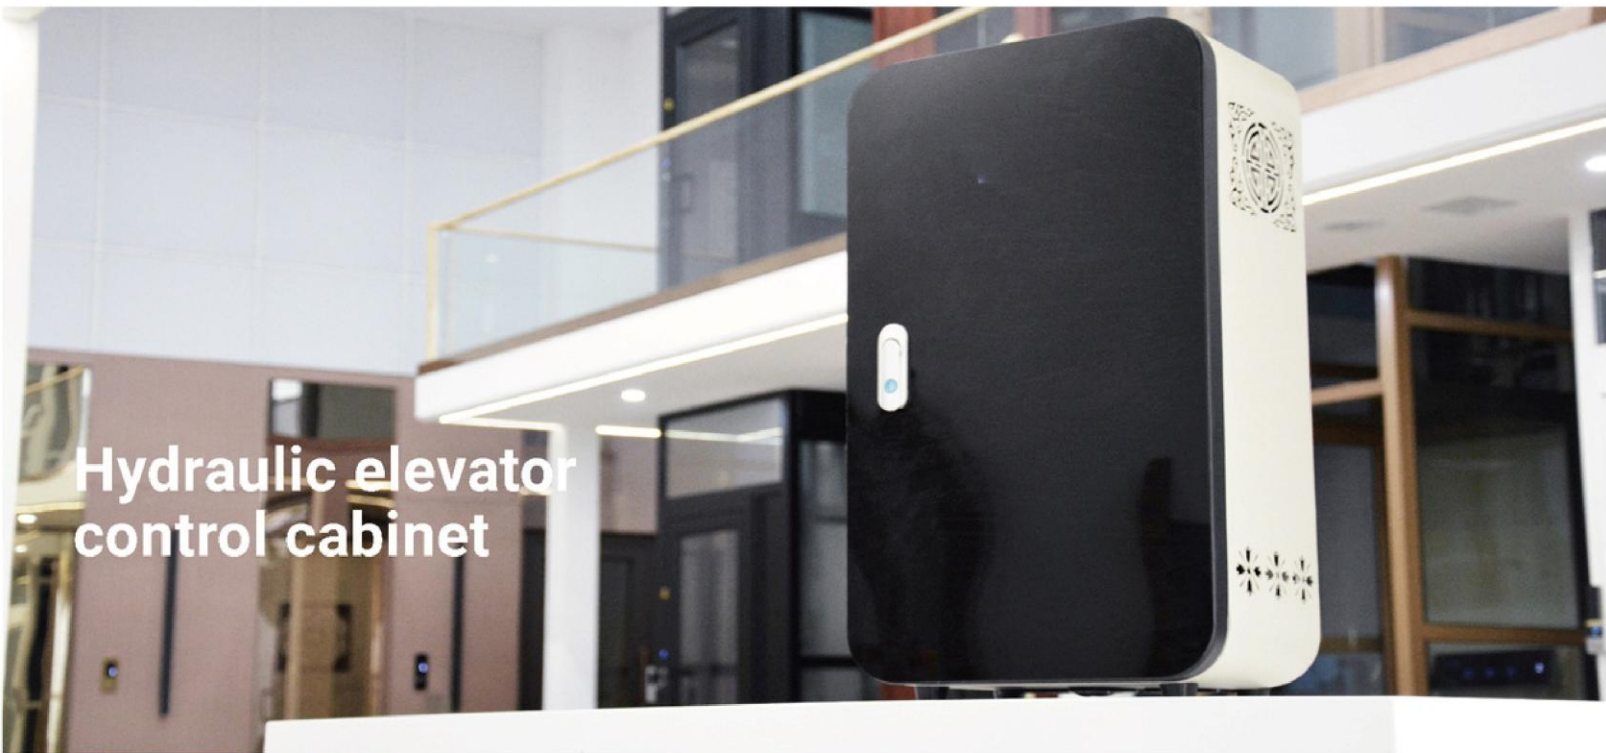


Hydraulic elevator control cabinet




Our standard 2.2/3KW pump station uses a 4KW inverter. The 3.75KW pump station matches the 5.5KW inverter with excess capacity and config-ures the elevator to have stronger upward power and lower failure rate.

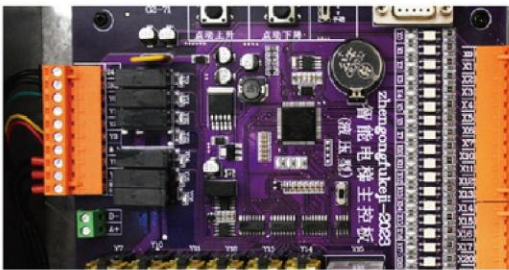

Use the main control board to replace the original various electrical components. The main control board has a high degree of integration and more stable operation.

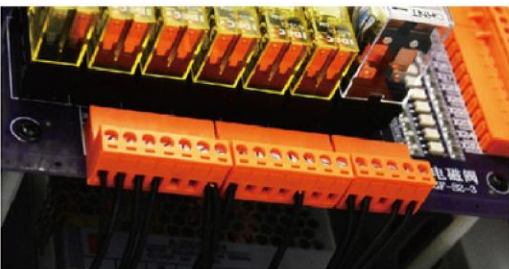

This control cabinet is wired for internal use. The minimum diameter of the national standard wire control wire is 0.75, with better conductivity and lower failure rate

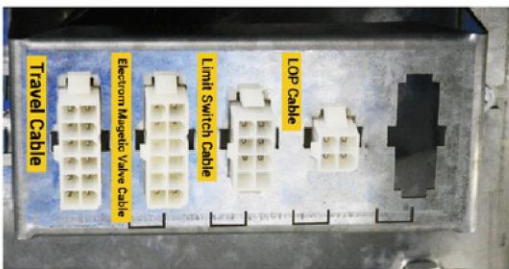

Distribution box wiring harness plug-in, supporting internal and external calls, all internal and external calls are shortcut plugs, no wiring is required, just plug in. Make the operation more precise and safe.



Decor Can Be Customized

“MAKE YOUR ELEVATOR UNIQUE AND UNIQUE”



we not only focus on providing high-quality hydraulic elevators, but also provide customers with customized car interior decoration services.


Ceiling

Car Wall

Integrated Control Box

Car Door

Floor

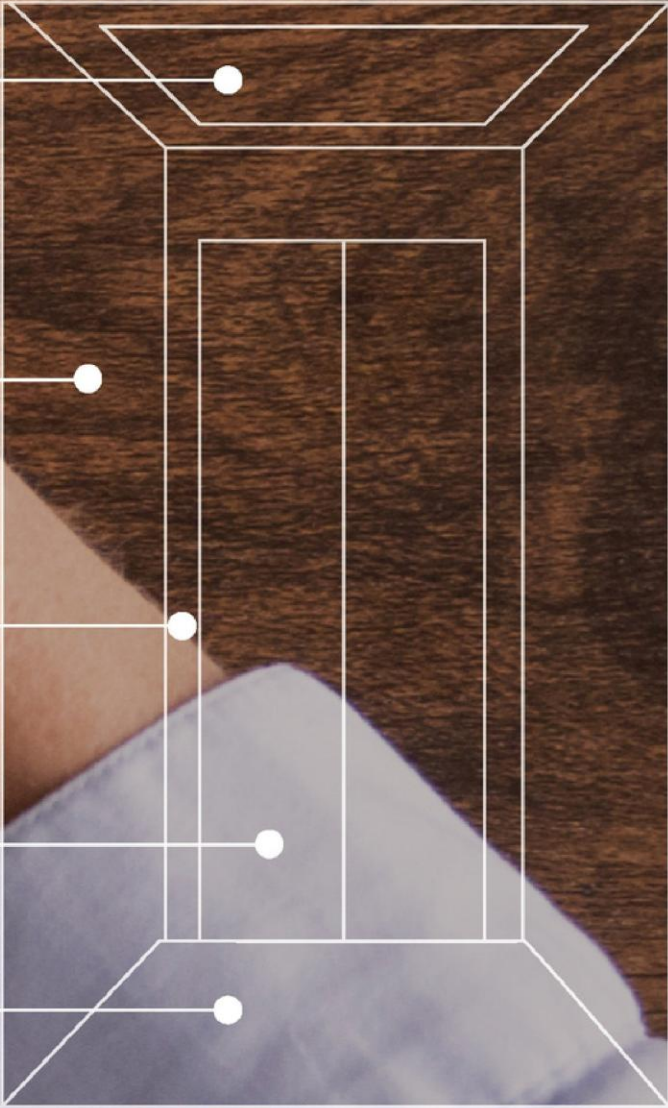

We are well aware of the importance of car interior decoration in increasing comfort and beauty, so we provide each customer with personalized design solutions to make your elevator unique and show your personality and taste.



Light Curtain Protection

Light curtain protection can promptly detect objects entering the elevator door area to avoid pinch accidents, protect passenger safety, and improve comfort and convenience.




Safety gear

Safety gear ensures elevator safety, with quick triggering, multiple protections and wide applicability.



UPS

UPS provides stable backup power, in case of power failure or wires breakdown, it will help you get out of the elevator.

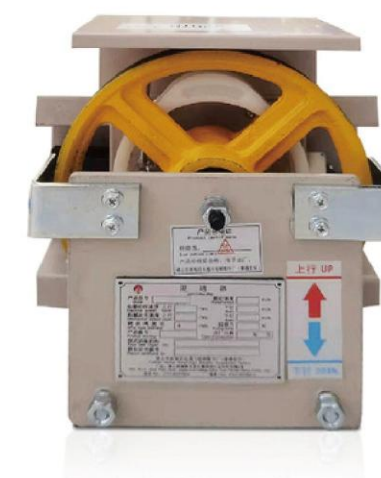

Speed limiter

Speed limiter ensures passenger safety, avoid elevator speeding, stop in time, prevent accidents, and protect elevator equipment and building structures.




Bottom safety sensor

The bottom sensor will stop the elevator once it touches any obstacle, it can protect the pets and people that get under the elevator by mistake.


STANDARD CONFIGURATION



Focus on
home elevators




Standard Car Etching Panel

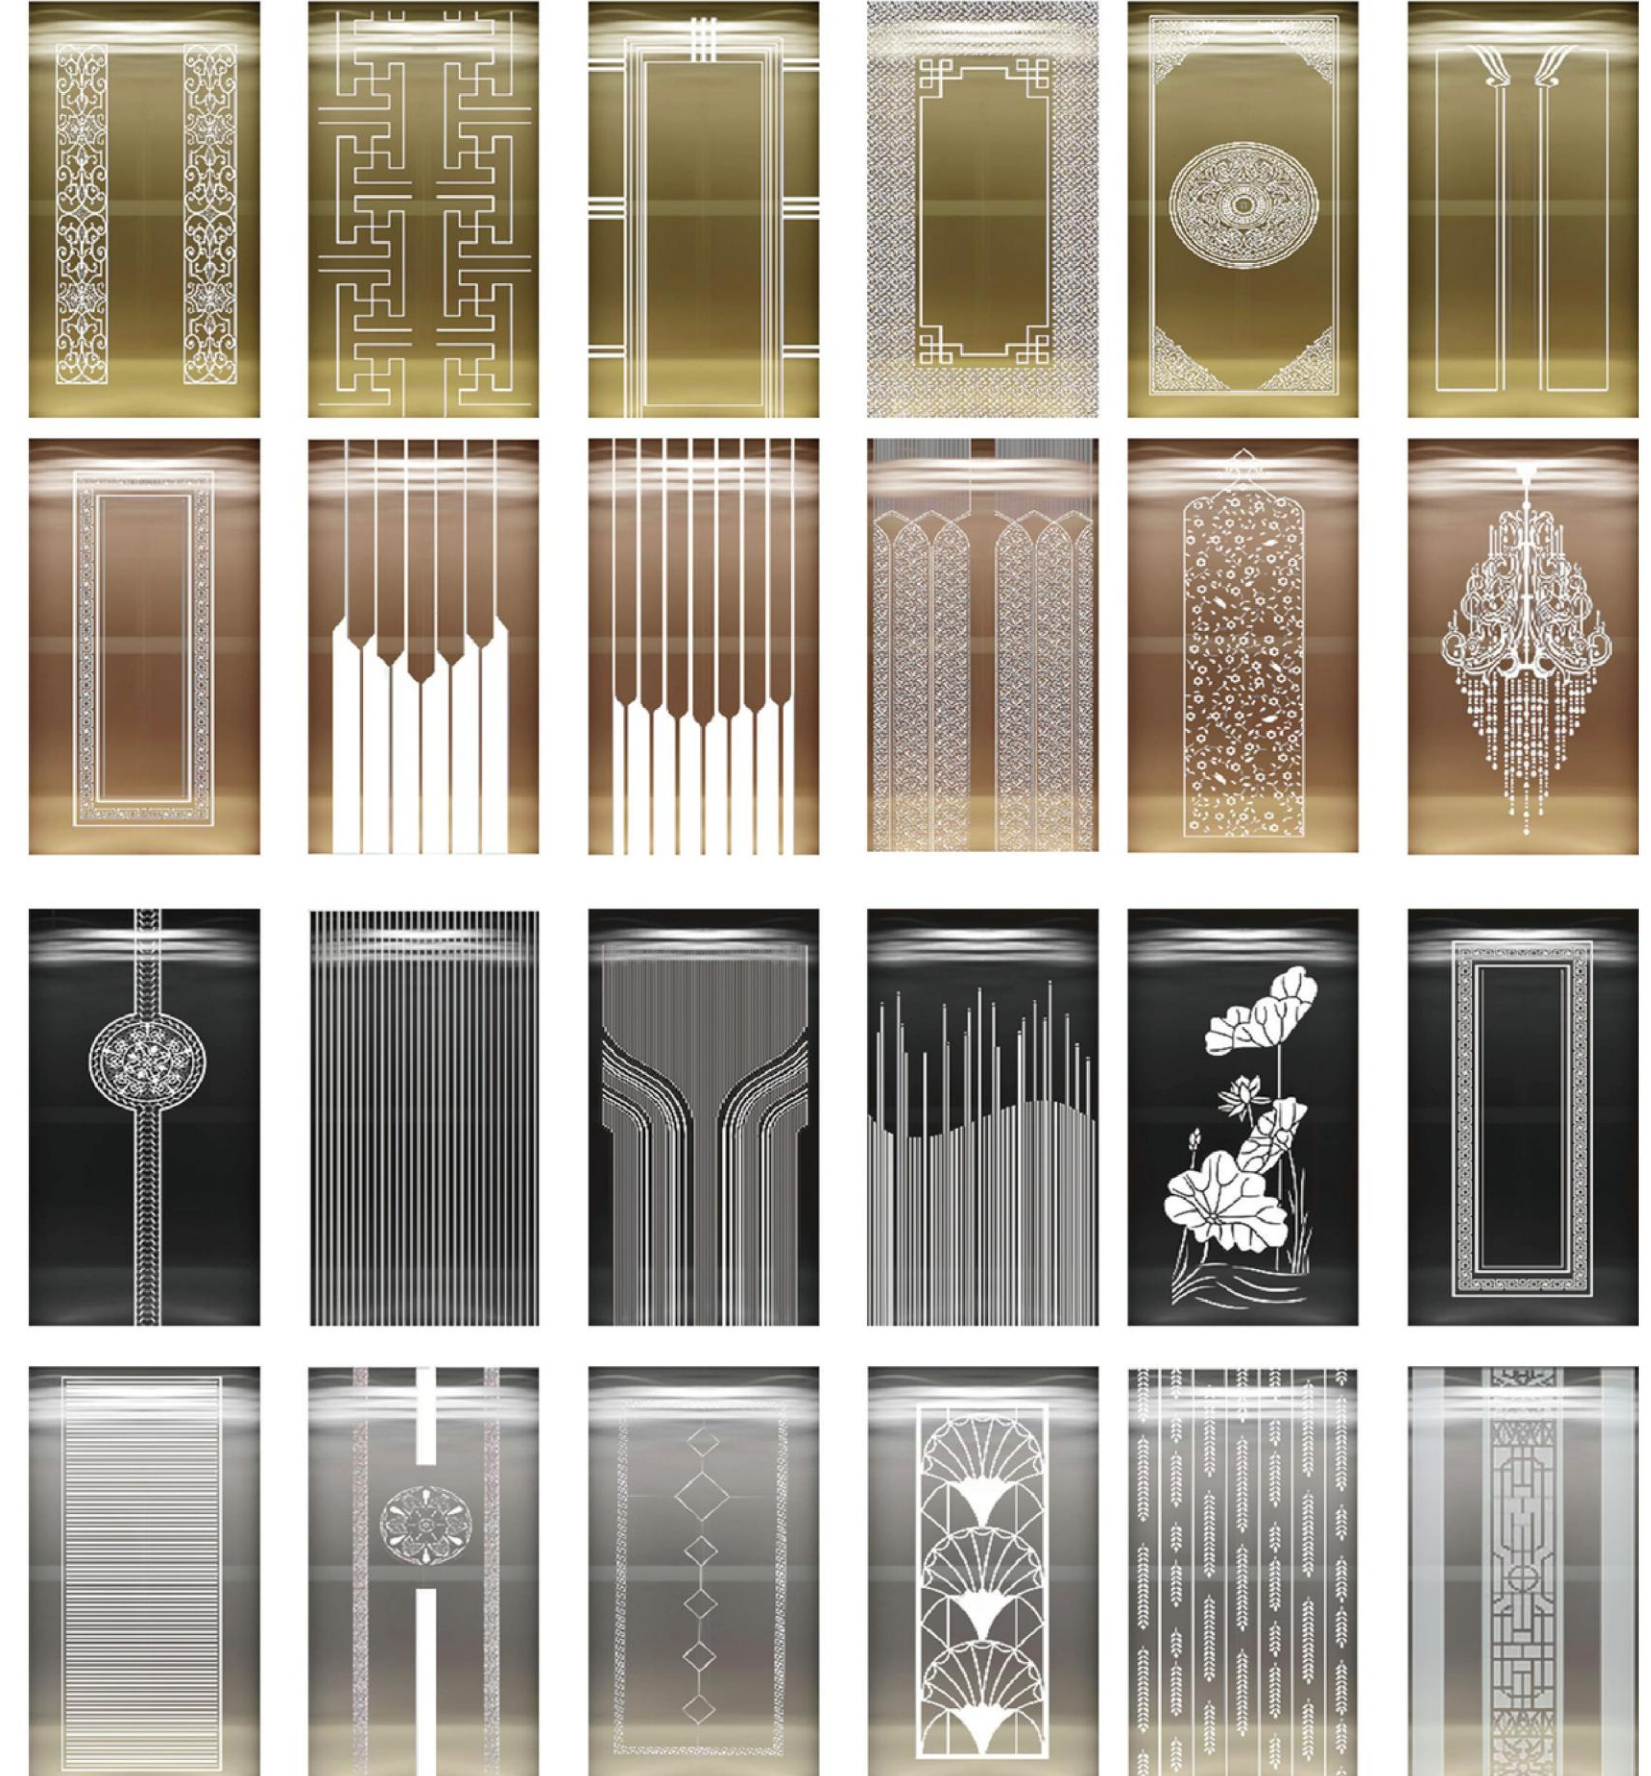


OPTIONAL CONFIGURATION



FOCUS ON
HOME ELEVATORS



LED
Board




LED
Ceiling



Car Examples




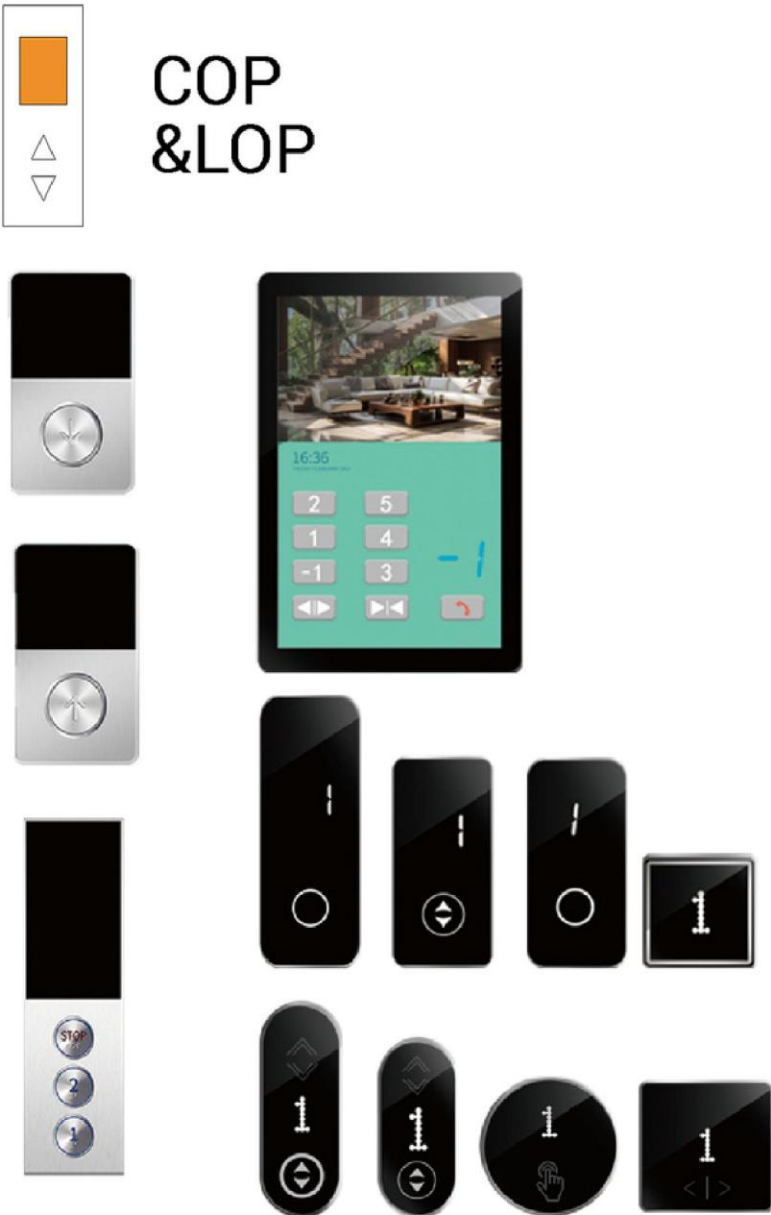


Automatic
Double Swing Door

Automatic Single Swing Door Or
Handle hidden manual door

Handle type manual

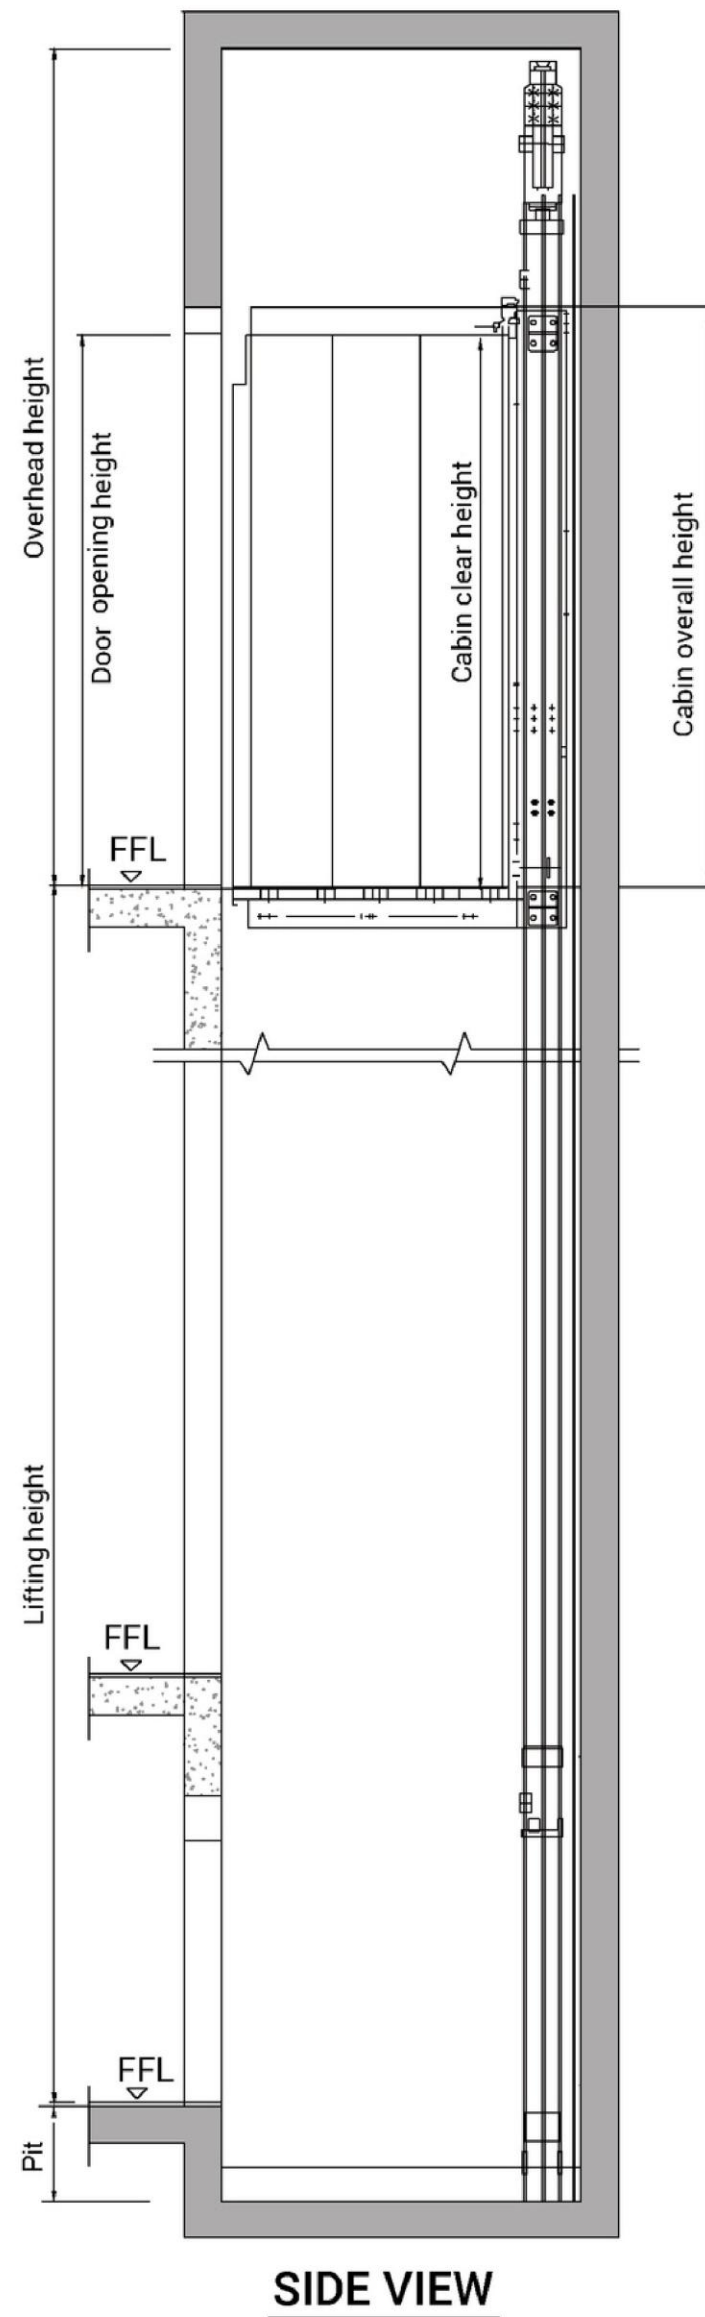







TOP VIEW

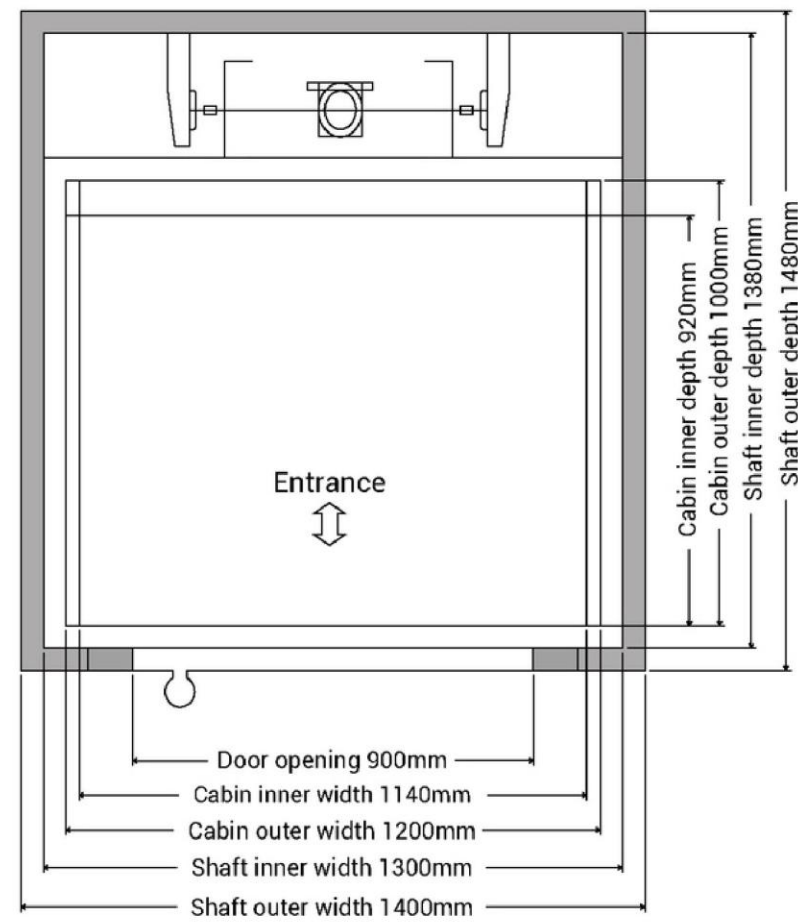

Hydraulic home lift basic parameters


Load capacity	400kg
Max. height	5 floors
Speed	0.3m/s
Min pit	0
Overhead height	2200mm
Cabin entrance numbers	1,2,3
Cabin door options	Light curtain, folding door
Landing door options	Manual or automatic swing door

The above dimensions are for design reference, and the specific dimensions shall be based on the civil engineering drawings provided at the time of contract signing

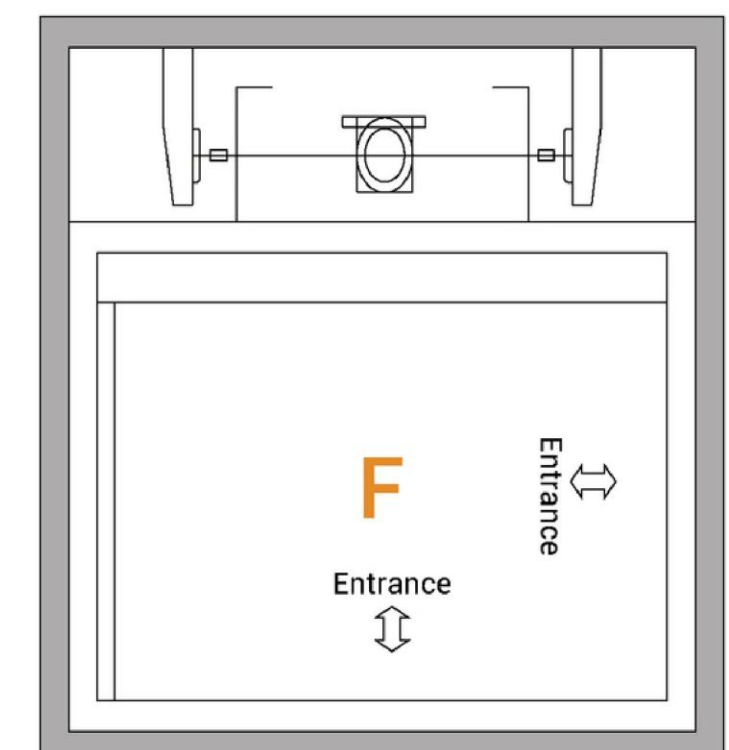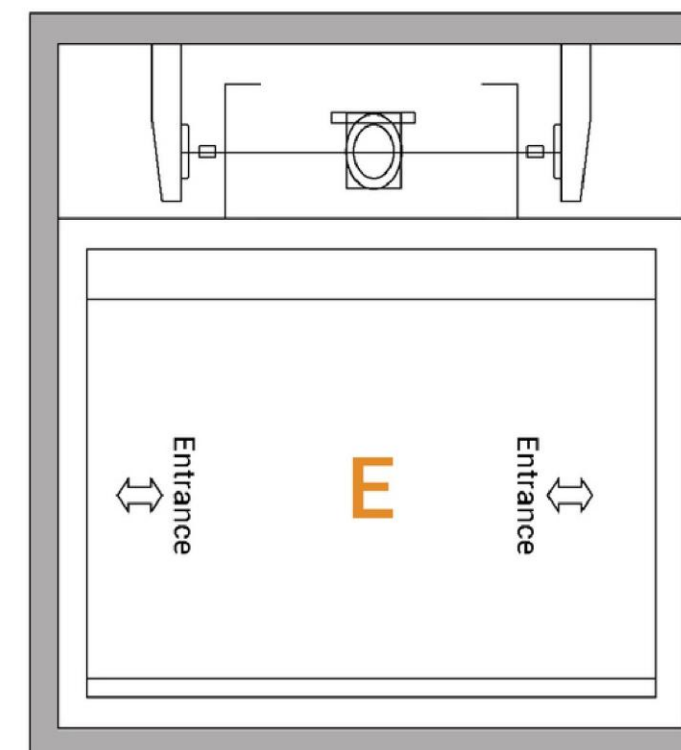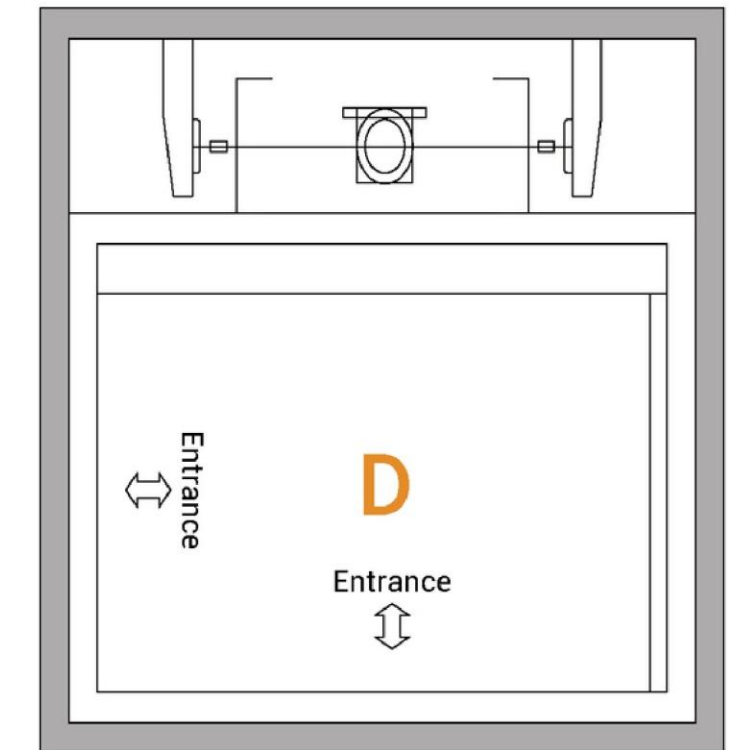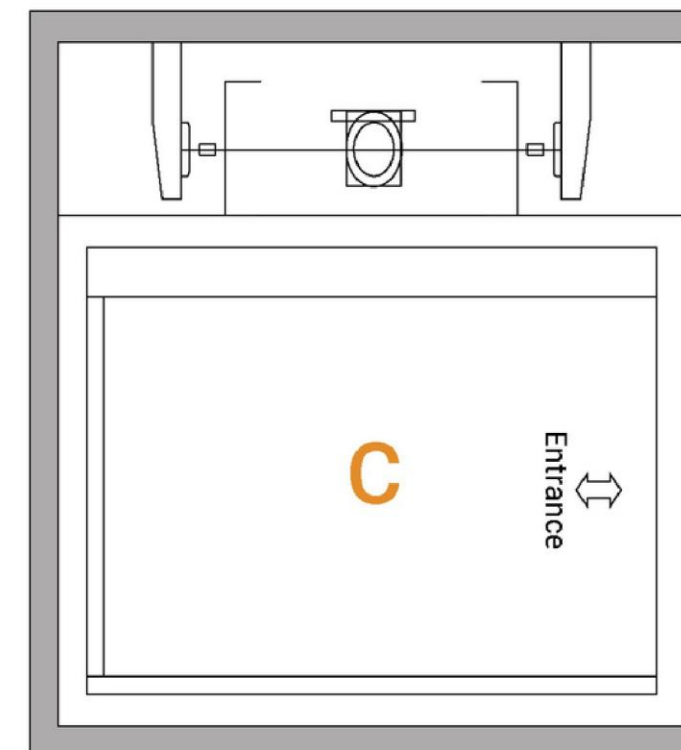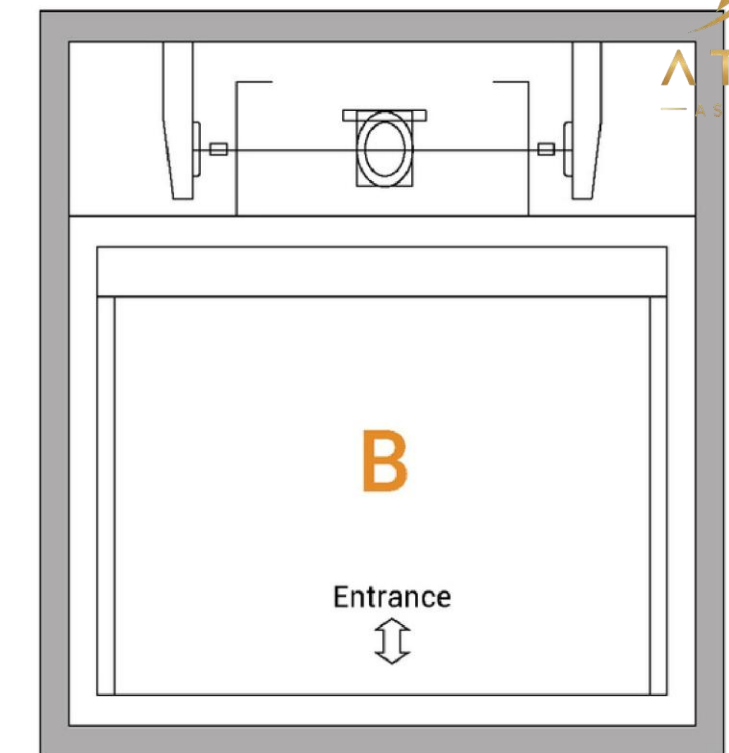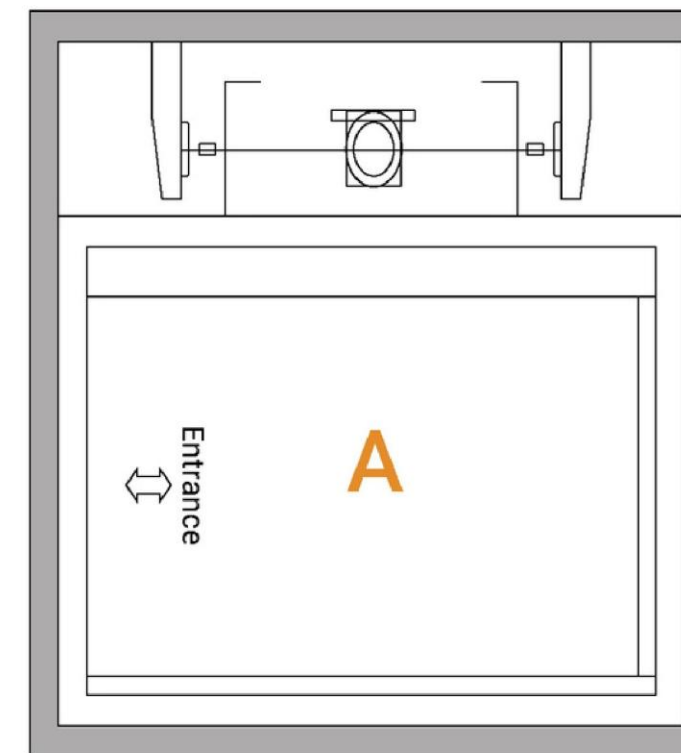




Color Options

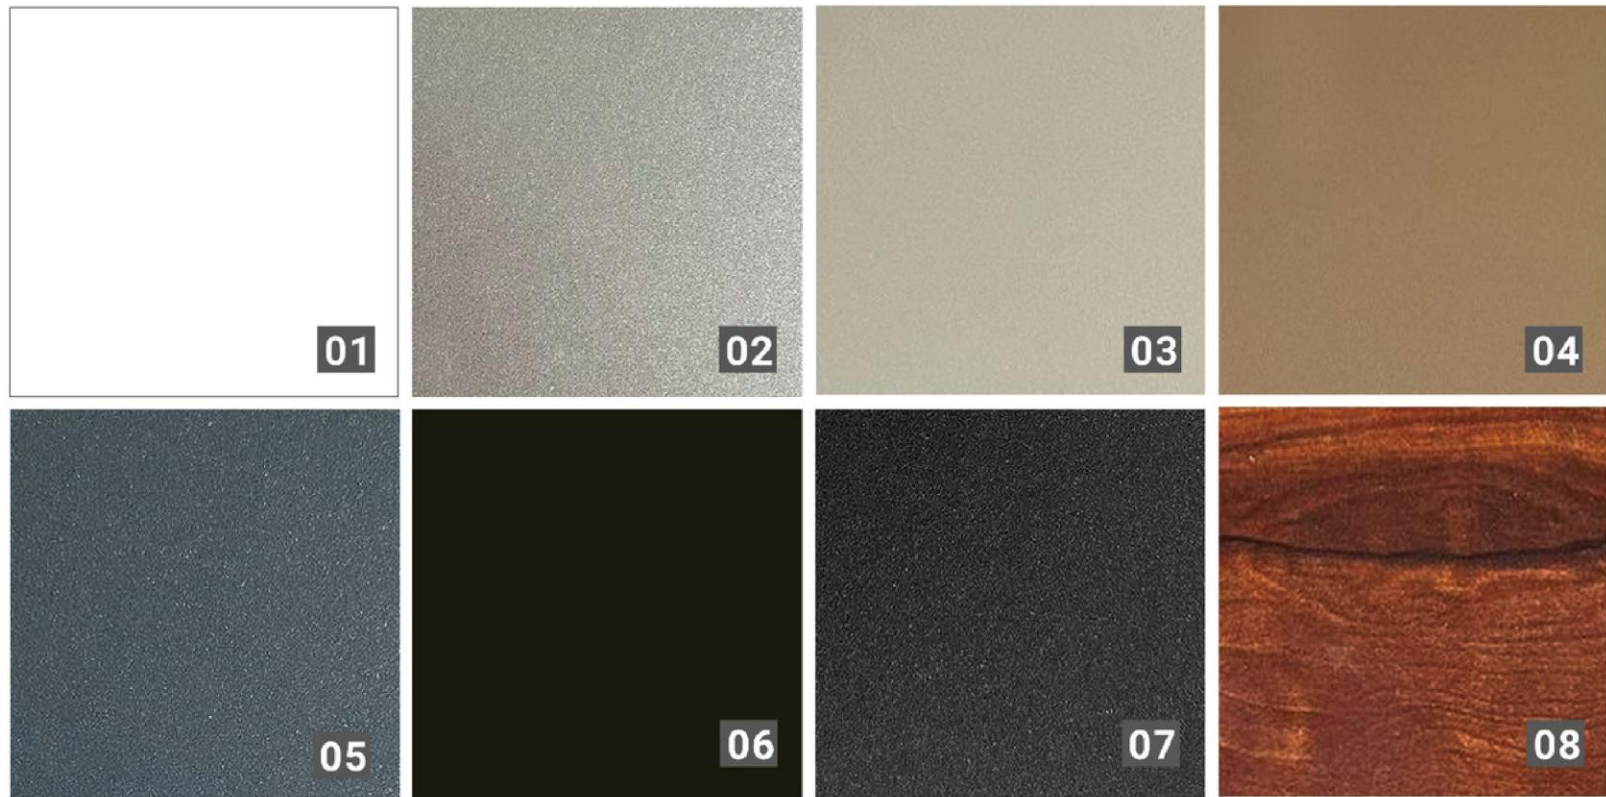

Glass Color Options

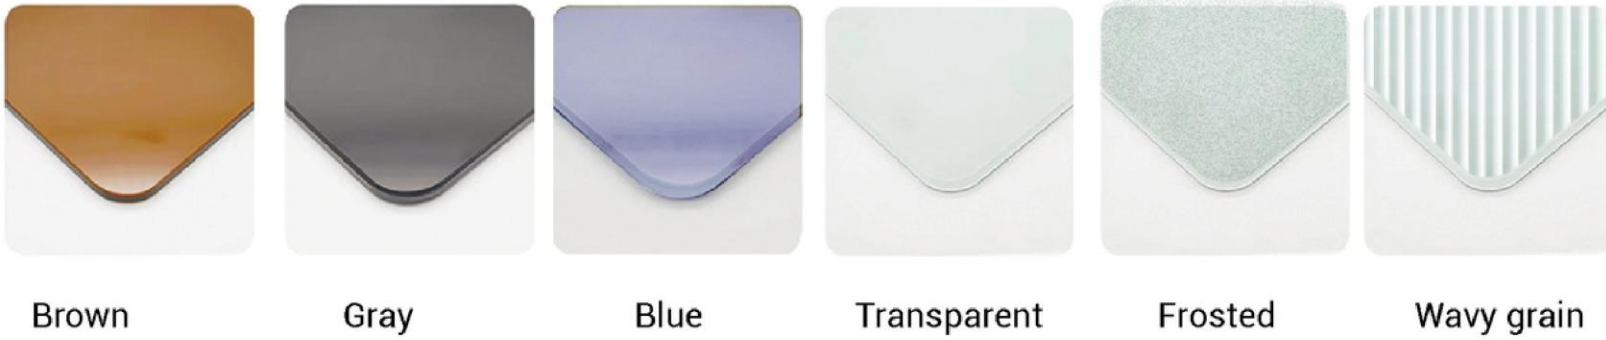

1

Customer built elevator shaft

Elevator can be installed directly in the shaft

2

Space in the middle of stairs

Elevator can be installed in the middle

3

Space in the hall

Elevator can be installed near to floorslab

4

Space is floor opening

Elevator can be installed in the floor opening

5

Space is outside of house

Elevator can be installed near to the wall

Shaft requirement

Hydraulic home lift is shaftless model, customers can build shaft by the mselves, purchase glass shaft from us, or choose without shaft.

Hydraulic Drive System

Name	Model	Material
Electric Machinery	2.2kw-3.75kw50hz Leakage Protection	Silent Variable Frequency Motor
Hydraulic Pump	Overload Protection Emergency Descent	Component Material
Hydraulic Cylinder	Hsg70/50/1.0t	Bore 70
High Pressure Oil Pipe	2-12-40mpa	3 Layers Of Steel Wire+special Rubber
Hydraulic Oil	High Wear Resistant 32# Hydraulic Oil	32# Hydraulic Oil
Coupling	Conventional Parts	Component Material
Relief Valve	Conventional Parts	Component Material
Throttle Valve	Conventional Parts	Component Material
Sealing Element	Nok Ryt	Silicon Rubber
No Setback Proportional Valve	Hydraforce Electro-hydraulic Proportional Valve	Solenoid Valve
Combined Pad	Nok Combination Pad 61-80	Metal Pad And Rubber

Electric Control System

Name	Model
Control Box	400*500*200
Frequency Converter	200m-004g1b-jt
Main Control Board	Thzg-03
Circuit Breaker	Dz47sn2c32
Guide Rail Socket	Dz47x510
Power	S-200-24
Safety Seat	Rt18-32x
Control Line	Rv0.75 Rv0.1.5 Rv2.5
Repeater Relay	Rj2s-c1-d24
Repeater Relay	Jqx-13f[D]/2z
Terminal Block	Tb-2503
Terminal	Sv2-4
U-shaped Guide Rail	Conventional Parts
Fuse	Ro15
Ups	Vd600a

Lifting System

Name	Model	Material
Countertop Panel	4mm Checkered Plate	45#steel
Table Frame	50×50×4rectangular Tube	45#steel
Guide Rail Frame	40×40×4rectangulartube	45#steel
Equipment Track	t75 Special Passenger Elevator Track	Tsection Steel
Axle Sleeve	φ100×15mmseamless Pipe	45#steel
Bearing	nsk6205bearing	6205
Guide Shoe	special Roller Guide Shoe For Passenger Elevator	45#steel
Support Tube	φ80×7.5mmseamless Pipe	45#steel
Guide Beam	120×60×4mmrectangular Tube	Q235c
Auxiliary Support	80×40×4mmrectangular Tube	Q235c
Boot Lining	reinforced Boot Lining	High Wearresistant Nylon
Lifting Frame	high Strength Lifting Frame Factory Equipped	10mmthick45#steel
Steel Strip	12core Steel Strip	High Wear Resistant Rubber + Steel Core
Wire Rope	8×19s+nf-8mm	Special Steel Core For Elevator
Sprocket	0120round Steel And Bearing	45#steel
Cylinder Lug	12mmsteel Plate	45#steel

Other Configurations

NAME	MODEL	MATERIA L
Car rear wall	Stainless steel plate	304 stainless steel
Car side wall	Stainless steel /aluminum alloy tempered glass	304 stainless steel
Lift car	Stainless steel plate	304 stainless steel
Car folding door	Aluminum alloy /tempered glass	1.8mm aluminum alloy
Landing door manual door	Aluminum alloy+5mm tempered glass	2.2-3.5mm aluminum alloy
Landing door electric double opening	Aluminum alloy+5mm tempered glass	2.2-3.5mm aluminum alloy
Backplane	Etched stainless steel checkered plate	Mirror /etching treatment
Safety light curtain	917B71	154 harness
lighting	2.5cuntled lighting-6W	LED lighting
Aluminum alloy sightseeing shaft	2.2mm/3.5mm high strength aluminum profile	2.2mm/3.5mm aluminum profile