
36-LS75-A / R1


鑫图 A6504-Pro：单板直装，主板光高 75 mm

mm | Orthographic views: viewing direction identified on each view | Nominal dimensions


FRONT (-Y)



TOP (+Z); dashed circles = bottom counterbores

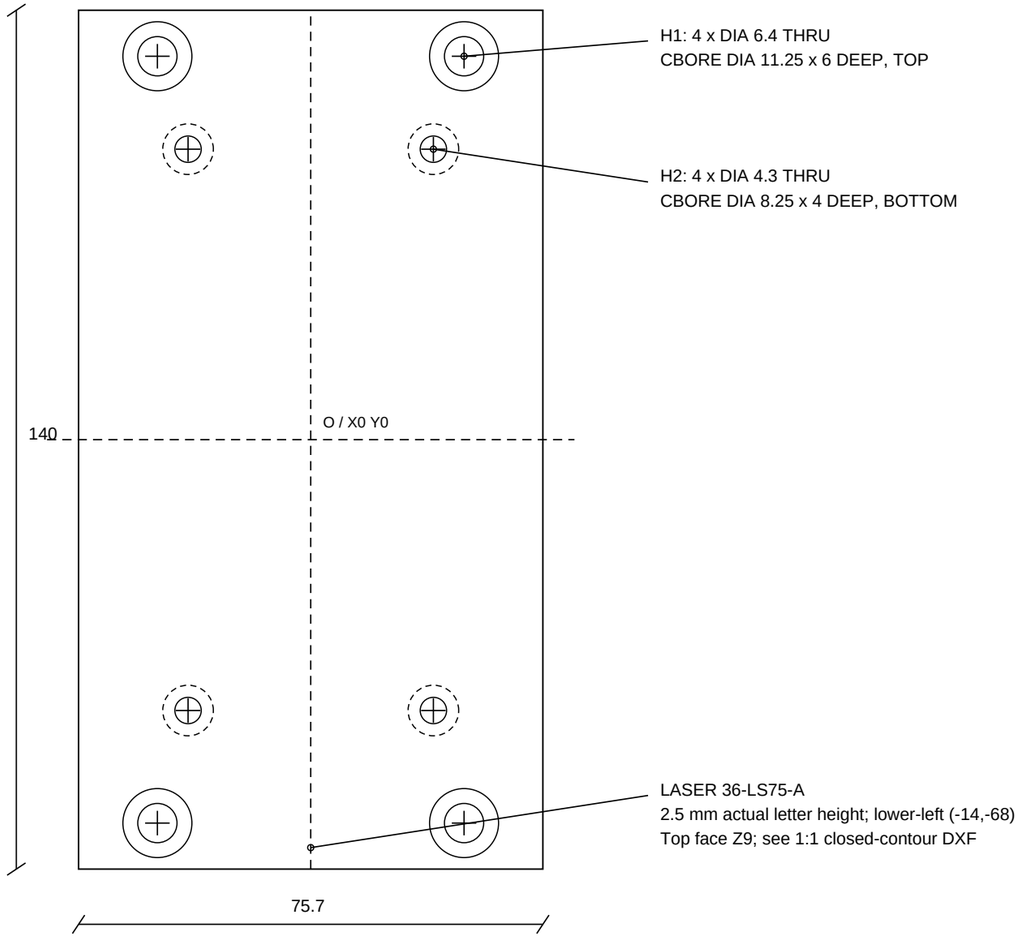

LEFT (-X), horizontal = -Y

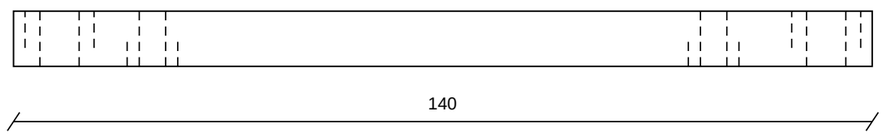

ID	X	Y	Entry
H1	-25, +25	-62.5, +62.5	TOP
H2	-20, +20	-44.15, +47.35	BOTTOM

Datum O: stage center in plan; local Z0 = adapter bottom.

World local origin: (0,0,26); camera mounting face Z35.

Height chain: 26 + 9 + 40 = 75 mm.

4 x M6x8 to stage: 3 mm grip + 5 mm engagement.

4 x M4x8 to camera: 5 mm grip + 3 mm engagement.

Original rear washers are NOT used in this new stack.

Assemble camera to plate from below BEFORE mounting stage.

Fit combined unit; tighten four exposed end M6 screws from top.

Check cap heads are flush or below the bottom face.

Use 6 mm OD tool shaft, clear above camera before turning.

Source STEP SHA256:

1512675d1b464036e407d6afdaf4e391

FIRST ANGLE / scale 1:1 / view directions explicitly labelled

316L / demagnetize + passivate / ID by LASER, do not mill letters / Deburr edges


35-LS75-H / R2

滨松侧转90°：一体直角座 + 双三角筋；名义光高75


mm | Orthographic views: viewing direction identified on each view | Nominal dimensions

FIRST ANGLE / scale 0.8:1


FRONT (view from -Y)

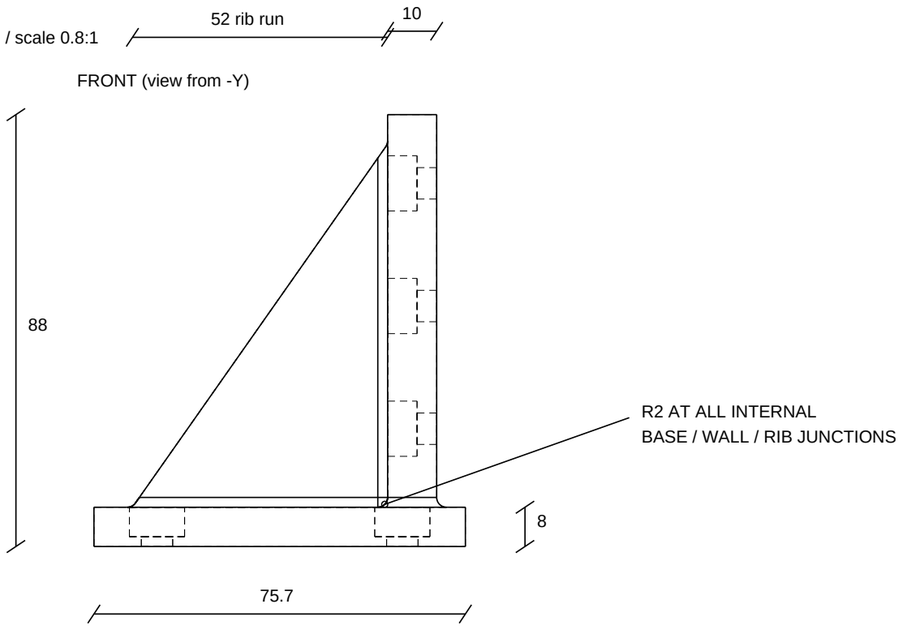

LEFT (view from -X)

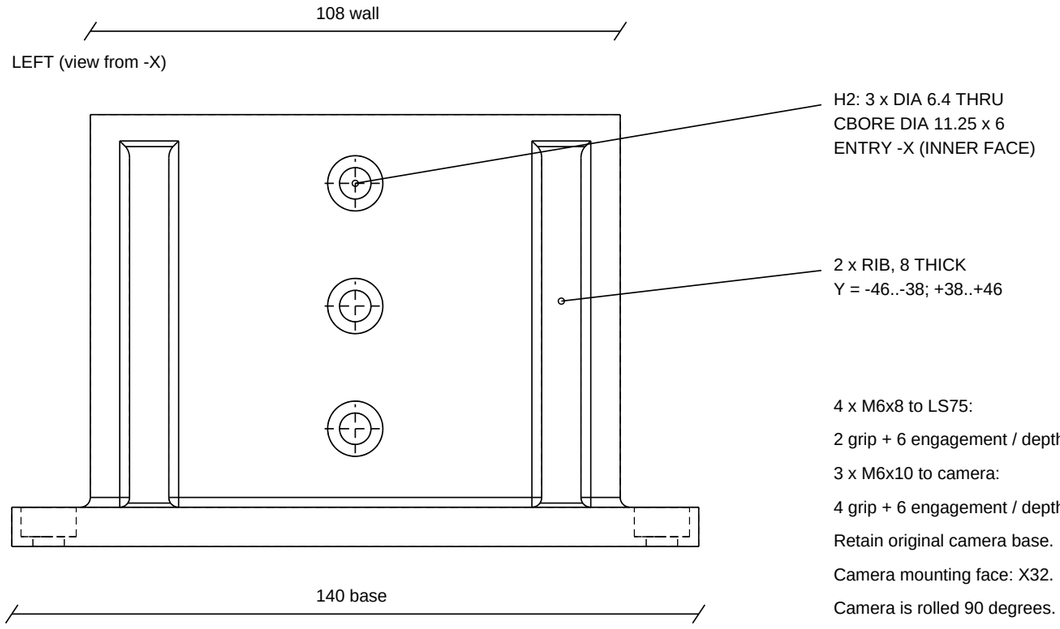

TOP (view from +Z)

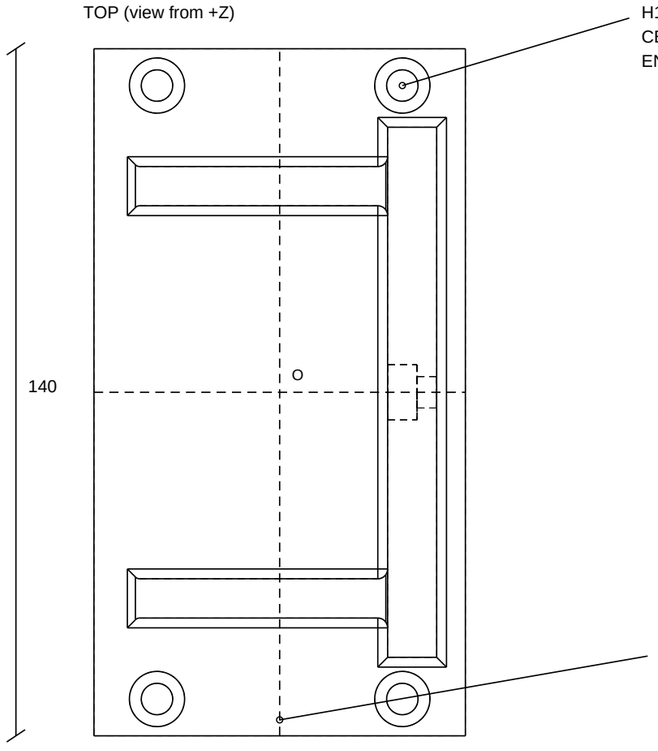

ID	X	Y	Z / face
H1	-25,+25	-62.5,+62.5	0..8
H2	22..32	0	24,49,74

O: stage center XY; local Z0 = contact plane.

World placement = local + (0,0,26).

Base: X -37.85..37.85; Y -70..70; Z0..8.

Wall: X22..32; Y -54..54; Z8..88.

Rib triangle (X,Z): (-30,8), (22,8), (22,82).

Rib run 52; rise 74; 2 ribs, thickness 8.

R2 blends are material additions at internal roots.

Model is one solid; no welding or bolted joints.

4 x M6x8 to LS75:

2 grip + 6 engagement / depth 7.

3 x M6x10 to camera:


4 grip + 6 engagement / depth 8.

Retain original camera base.

Camera mounting face: X32.


Camera is rolled 90 degrees.

Assembly optical axis: X95, Z75.

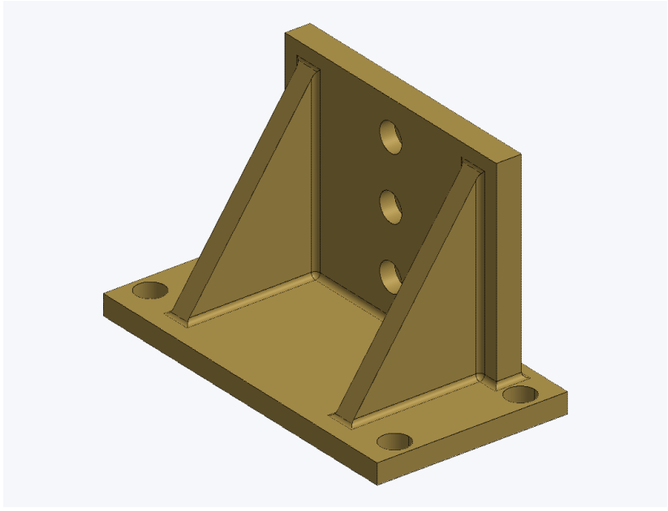


Model SHA256 5f75449e1201077b96c2561a3

316L / demagnetize + passivate / ID by LASER, do not mill letters / Deburr edges

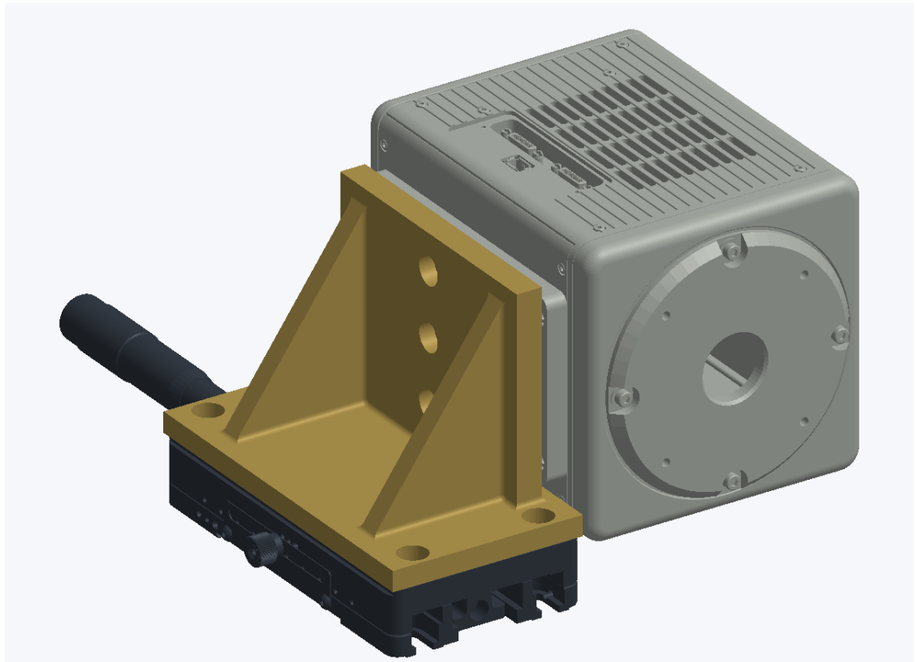

滨松：原底座转至竖直面，用3×M6×10锁紧

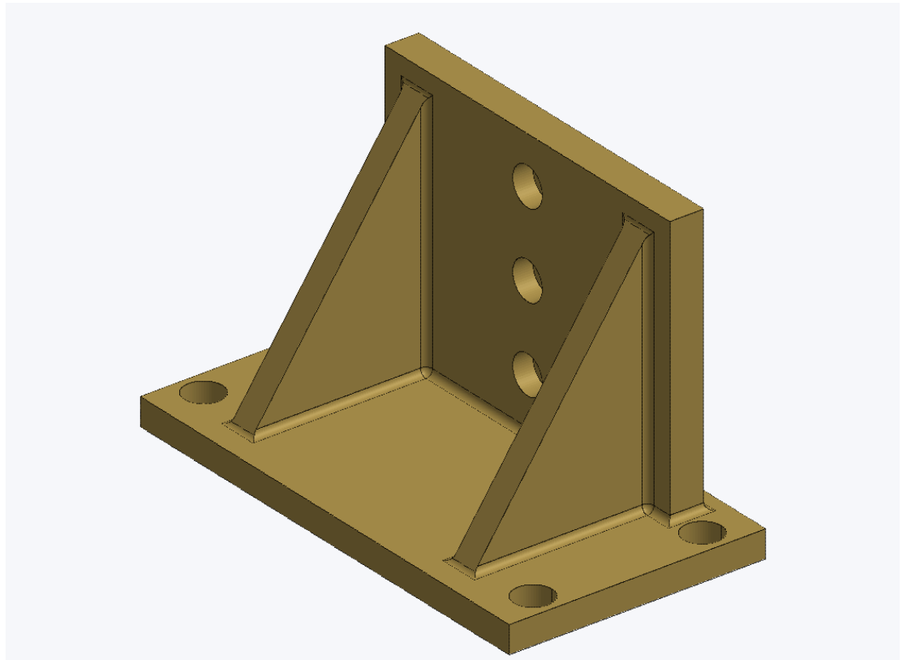

316L一体件；10 mm立板 / 8 mm底板和双筋

相机侧转90°，主板光高75；光轴距台中心95；机身侧面与台边名义间隙2.15 mm。

装配顺序与操作

1. 先将 LS75-50C 固定到主面包板。台底四个U槽与实际板孔匹配需实配核对。
2. 用4×M6×8从两端上方锁紧直角座；再托住滨松，将原底座贴到立板外面X32。
3. 从两道筋之间横向拧入3×M6×10。相机画面随安装侧转90°，按采集需求校正方向。
4. 保留沿光轴的±25 mm行程；线缆、水管在全行程中留余量，单独固定应力释放。
5. 鑫图沿用第1页9 mm板：台外先从底面装4×M4×8，再用4×M6×8装到位移台。

几何验证

滨松新件：有效单实体、BOP检查及STEP回读通过。
原相机3孔及位移台4孔已对轴；各叶实体在±25行程避让。
Ø10螺钉头装入路径及Ø6长杆工具通路已核验。
鑫图原9 mm板及总装保持原哈希，沿用已完成的孔位核验。

承载与光学基准仍待实物确认

按相机3 kg及几何轴重心代理，偏载力矩约2.99 N·m；
较旧下沉方案的同类估算下降约25%。这不是刚度或振动测试。
位移台许用偏载力矩未知；未做FEA、装配及振动实测。
两相机真实硅感光面轴向位置未确认；75为名义机械光轴。
鑫图源模型保留原有1处小实体拓扑警告。当前为审核稿。