
dome - TOP

red dot 1 = pin 1 black bar = cathode red + = cap + orange corner = hand-fitted dashed = fit last (key: last page)



dome - BOTTOM (seen from below, mirrored)

red dot 1 = pin 1 black bar = cathode red + = cap + orange corner = hand-fitted dashed = fit last (key: last page)

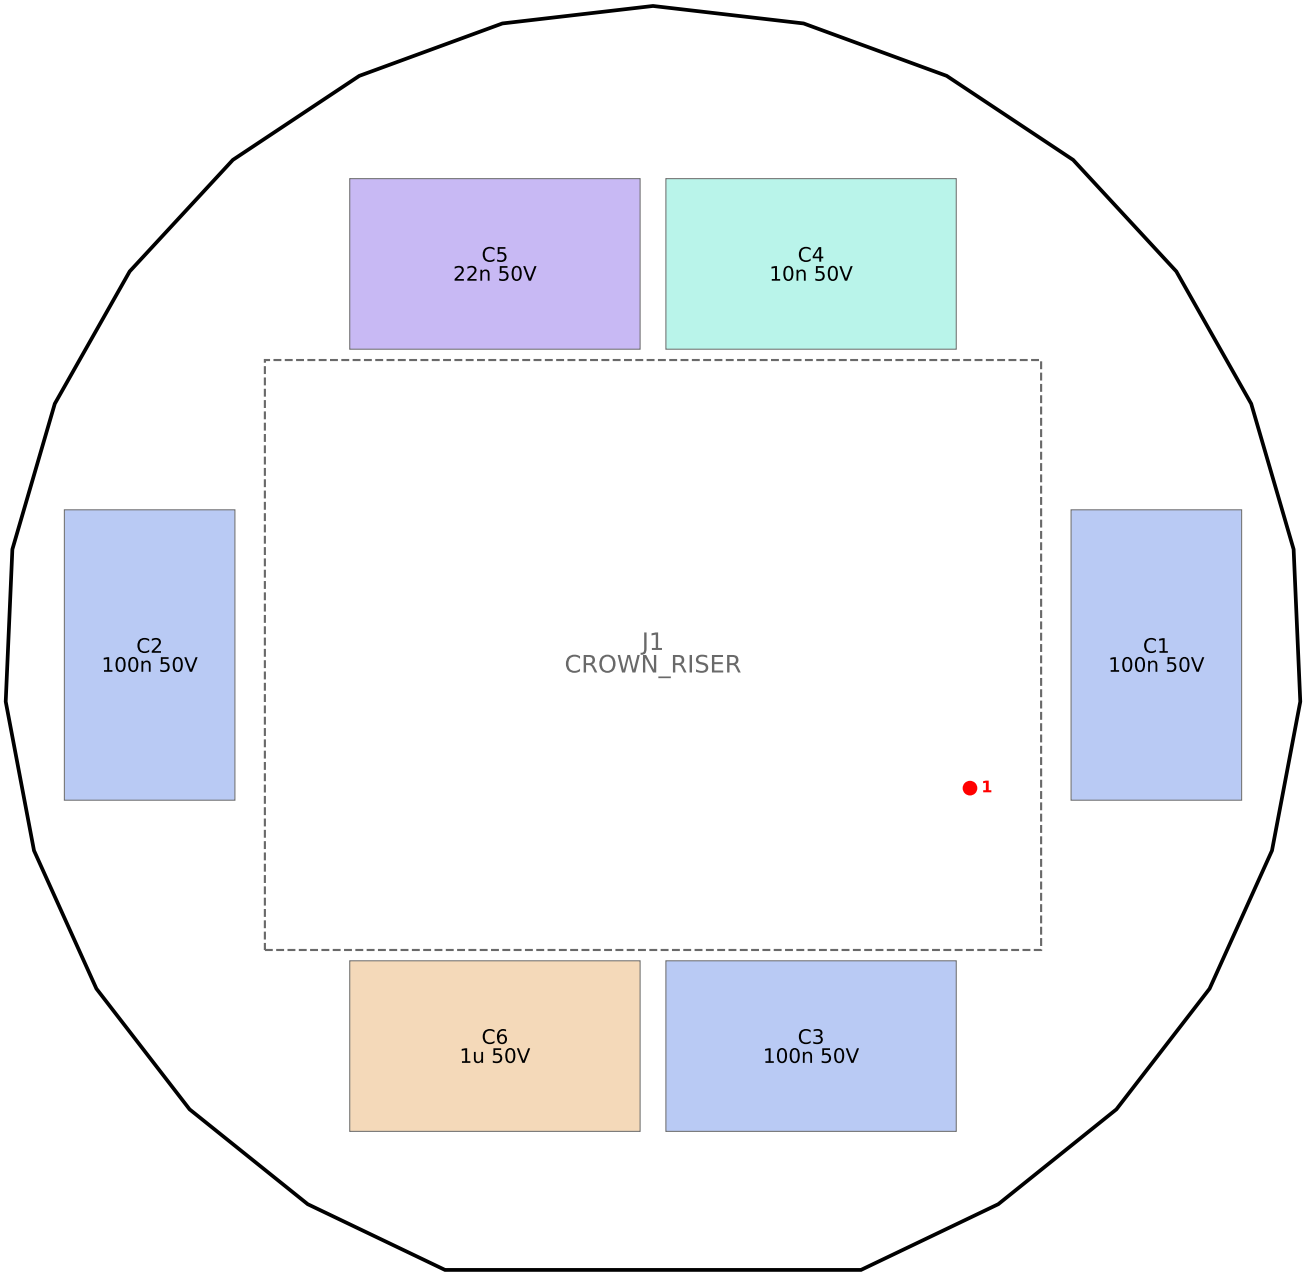

dome - values

- 100k x1 top: R3
- 100n 50V x3 bottom: C1, C2, C3
- 10M x1 top: R1
- 10k x1 top: R4
- 10n 50V x1 bottom: C4
- 1u 50V x1 bottom: C6
- 22n 50V x1 bottom: C5
- 4M7 x1 top: R2
- ADS1115IDGSR x1 top: U3
- CROWN_RISER x1 bottom: J1
- GUVA-C22SD x1 top: D2
- GUVB-C21SD x1 top: D1
- TLV9062IDGKR x1 top: U1
- TSL25911FN x1 top: U2

dome - key

Marks on the board pages

red dot + 1 : pin 1 of ICs, transistors, LEDs, optocouplers, connectors and modules

black bar   : diode cathode, matching the band printed on the diode body

red +   : + pad of electrolytic / tantalum capacitors

no mark   : resistors, ceramic capacitors, inductors, fuses, crystals, pin strips, bidirectional TVS

orange corner: part fitted by hand (not placed by JLCPCB); dashed outline: large part, fit it last

the BOTTOM page is mirrored: it shows the board as you see it from below

Finding pin 1 on the real part

SOT-23 (3 legs): the single leg on its own side is pin 3; pin 1 is left of it on the two-leg side

SOT-23-5 / SC-70 / SOIC / VSSOP / QFN / LGA: a dot, dimple or bevelled edge marks pin 1

Addressable LEDs: a marked (cut / green) corner - check the datasheet, it is easy to misread

Diodes: the band is the cathode (K)

Electrolytic capacitors: the stripe marks the - side (the other pad is +)

Tools

0805 / SOT-23: a 3-5x magnifier or a 10x loupe

QFN / LGA / DFN / SC-70: a USB microscope (check the pads under the part after reflow)