KRYKARD

# F62 - F65

## Leakage multimeter clamps

**For rapid testing of leakage currents and isolation faults on live installations!**

- Analysis of RCD trigger currents
- Earth leakage currents
- Unbalanced phase currents
- High immunity to currents of adjacent conductors
- Anti-harmonic filter selection for enhanced fault detection on disturbed systems
- 3-year warranty
- Compliance with standard VDE 0404

*Measure up*

# Rapid testing for leakage currents...

Your installation and its users may be endangered through isolation faults and untimely RCD tripping. Such phenomena are often caused by leakage currents that prove difficult to detect.

For testing and maintenance professionals in the industrial and tertiary sectors faced with this challenge, **F62/F65** pocket-sized clamps are the recognised solution, while providing the full range of functions proposed by conventional multimeter clamps.

The compact size facilitates access to the narrowest spreadsheets!

## DETECTION OF LEAKAGE CURRENTS AND ISOLATION FAULTS

Offering exceptional resolution of 10 µA and high immunity (70 dB) to eddy currents, **F62/F65** clamps are specially suited to the measurement of leakage currents that trigger RCDs, causing imbalances between phase-phase and phase-earth currents.

The harmonic filter facilitates the detection of faults on disturbed systems and power circuits (switched power supplies, variable speed drives, inverters, etc.).

***Isolation fault detection on live installations***

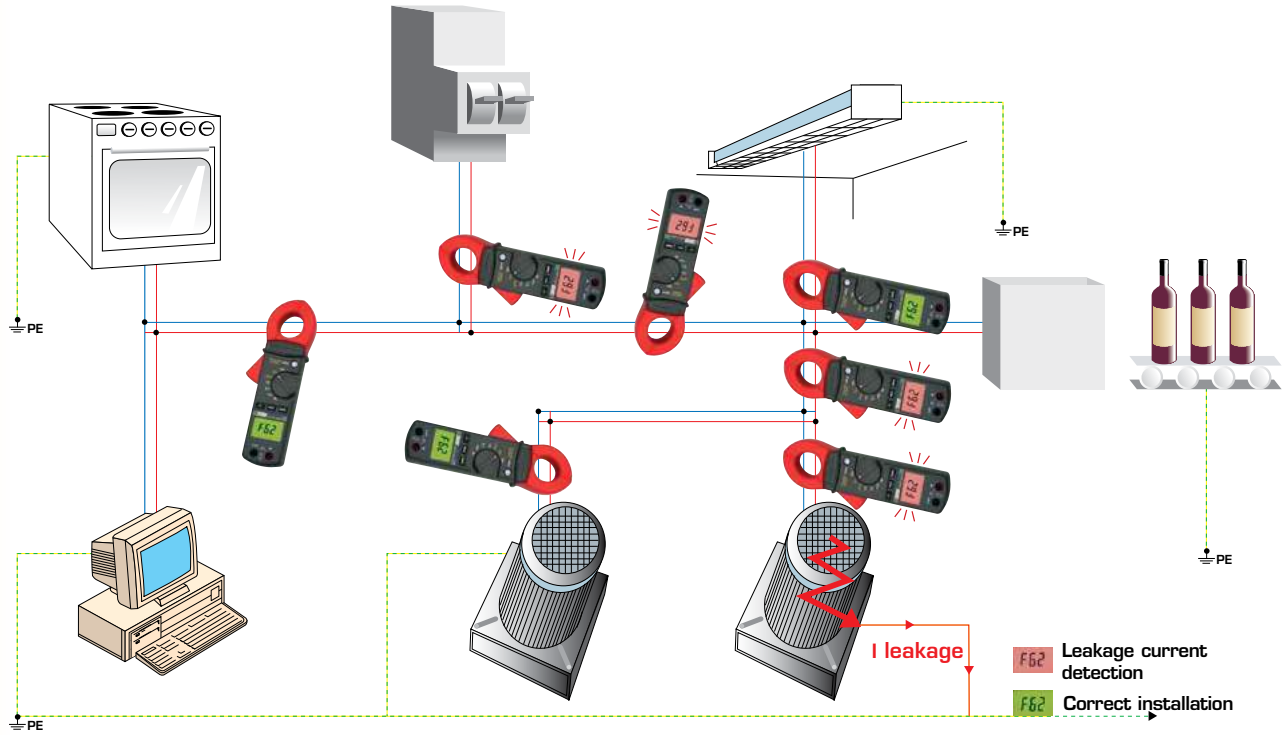

# And detection of isolation faults on live installations!

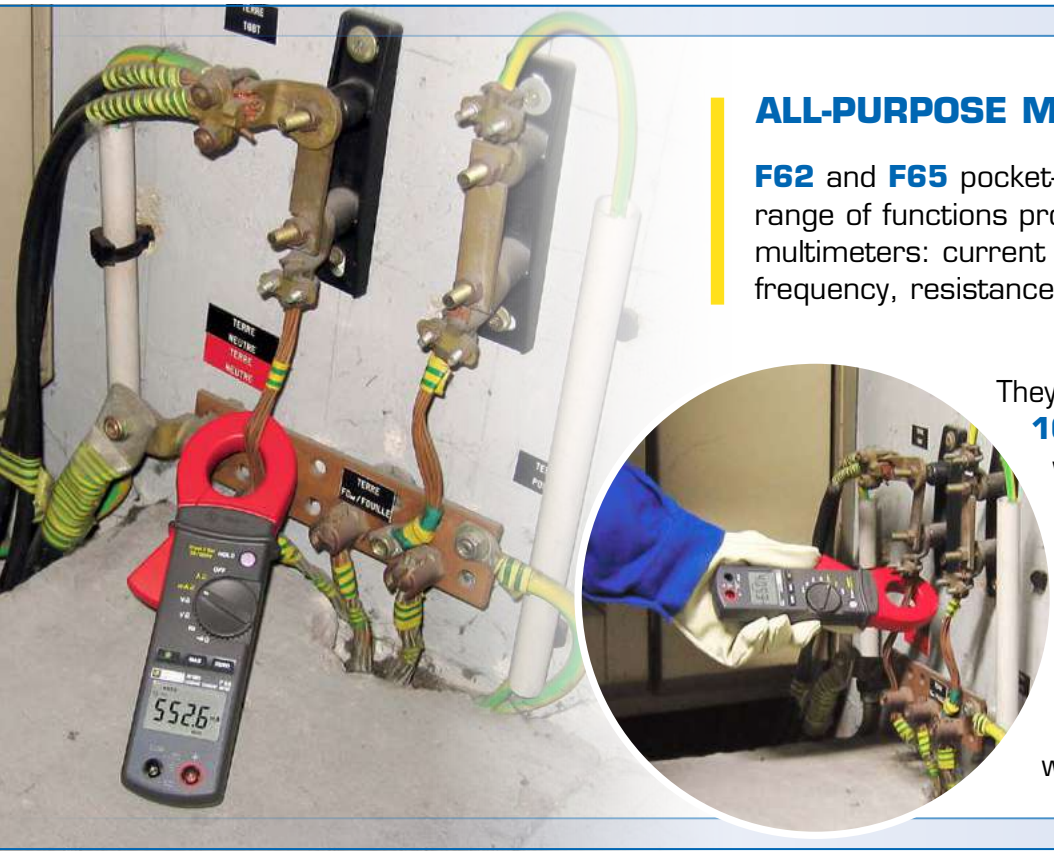

## ALL-PURPOSE MULTIMETER CLAMPS

**F62** and **F65** pocket-sized clamps provide the full range of functions proposed by conventional clamp-on multimeters: current up to 100 A, AC/DC voltage, frequency, resistance and audible continuity.



They are equipped with a **backlit 10,000-count LCD screen,** with display memory and **maximum value and differential measurement functions** (Delta).
To optimise the battery life, they come equipped with an **automatic power-off function,** in the event of prolonged periods without use.

High immunity offered by 28 mm maximum insertion jaws

Rotating selector switch for selection of desired measurement: current, voltage, frequency, audible continuity or resistance

"Zero" relative value function to facilitate comparative measurements

Activation of harmonic filter (Hold key)

Backlit 10,000-count LCD screen

## Other Chauvin Arnoux products for use in association with F62/F65 clamps

### Clamp jaws open to 115 mm!

**The B102 clamp**, associated with a multimeter, is the ideal accessory for use with F62/F65 clamps for the testing of installation feeders on large-diameter conductors.

### Complete verification of the safety of your electrical installations

In domestic, tertiary or industrial environments (TT, TN or IT systems), **the C.A 6116N electrical installation tester** offers a wide range of measurements for checking and certifying electrical installations' safety and compliance with the standards.

# F62 - F65 SPECIFICATIONS

| | | | | F62 | | F65 | | |
|---|---|---|---|---|---|---|---|---|
| **RMS measurement** | | | | | | ● | | |
| **Function** | | **Calibre** | **Resolution** | **Accuracy** | | | | **Protection against overloads** |
| | | | | *with filtre 50-60 Hz* | | *with filtre 50-60 Hz* | | |
| **AC current** | mA AC | 60 mA | 10 µA | 1.2 % ± 5 cts | 2.5 % ± 5 cts | 1.2 % ± 5 cts | 2.5 % ± 5 cts (50-500 Hz)<br>3.5 % ±10 cts (500 Hz-3 kHz) | 150 Arms |
| | | 600 mA | 100 µA | | | | | |
| | A AC | 10 A | 1 mA | 1.2 % ± 5 cts | 2.5 % ± 5 cts | 1.2 % ± 5 cts | 2.5 % ± 5 cts (50-500 Hz)<br>3.5 % ±10 cts (500 Hz-3 kHz) | |
| | | 80 A | 10 mA | | | | | |
| | | 100 A | | 5 % ± 5 cts | 5 % ± 5 cts (50-60 Hz) | 5 % ± 5 cts | 5 % ± 5 cts (50-60 Hz) | |
| **Voltage** | V AC | 600 V | 0.1 V | 1 % ± 5 cts (50-60 Hz)<br>1.2 % ± 5 cts (50-500 Hz) | | 1 % ± 5 cts (50-60 Hz)<br>1.2 % ± 5 cts (50-500 Hz)<br>2.5 % ± 5 cts (500 Hz-3 kHz) | | 660 Vrms |
| | V DC | 600 V | 0.1 V | 1 % ± 2 cts | | | | |
| **Resistance**<br>**Audible continuity** | Ω | 1 kΩ | 0.1 Ω | 1 % ± 3 cts<br>(Vmax measurement 3.3 V DC) | | | | 600 Vrms |
| | | Buzzer < 35 Ω | | | | | | |
| **Frequency** | A Hz | 100 Hz<br>1 kHz | 0.1 Hz<br>1 Hz | 0.5 % ± 2 cts (I > 10 mA) | | | | |
| | V Hz | 100 Hz<br>1 kHz | 0.1 Hz<br>1 Hz | 0.5 % ± 2 cts (V > 5 V) | | | | |
| **Display** | | | | 10,000 counts - 2 measurements / s | | | | |
| **Backlit LCD** | | | | ● | | ● | | |
| **MAX. value** | | | | 100 ms | | | | |
| **Relative measurement (ΔO)** | | | | ● | | ● | | |
| **Automatic switch-off/ HOLD function** | | | | ● | | ● | | |
| **Large clamping diameter** | | | | 28 mm | | | | |
| **Dimensions** | | | | 218 x 64 x 30 mm | | | | |
| **Weight** | | | | 280 g (with batteries) | | | | |
| **Standards** | | | | IEC 61010-1 / IEC 61010-2-032 / IEC 61010-2-033 | | | | |
| **Installation category** | | | | CAT III 300 V | | | | |
| **Protection rating of casing** | | | | IP 30 as per NF EN 60529 | | | | |

## To order

### Leakage multimeter clamps

F62..... P01120760

F65..... P01120761

Delivered with a set of elbowed male banana/straight male banana leads, 1 set of test probes, 2 x 1.5 V AAA/LR3 batteries, 1 bag and 1 operating manual in 5 languages.

### Accessories and replacement parts

Multiple accessories and measurement leads available.

*Please see the guide*

www.chauvin-arnoux.com

906211117 - Ed. 4 - 03/2015 VS - Non contractual document. Confirm specifications before ordering.

atandra
measure. protect. conserve
Atandra Energy Private Limited
No. 5, Kumaran Street, Pazhavanthangal, Chennai - 600 114
Tel: +91 44 4278 0700 | 4278 0600
www.atandra.in | energy@atandra.in

OUR DEALER