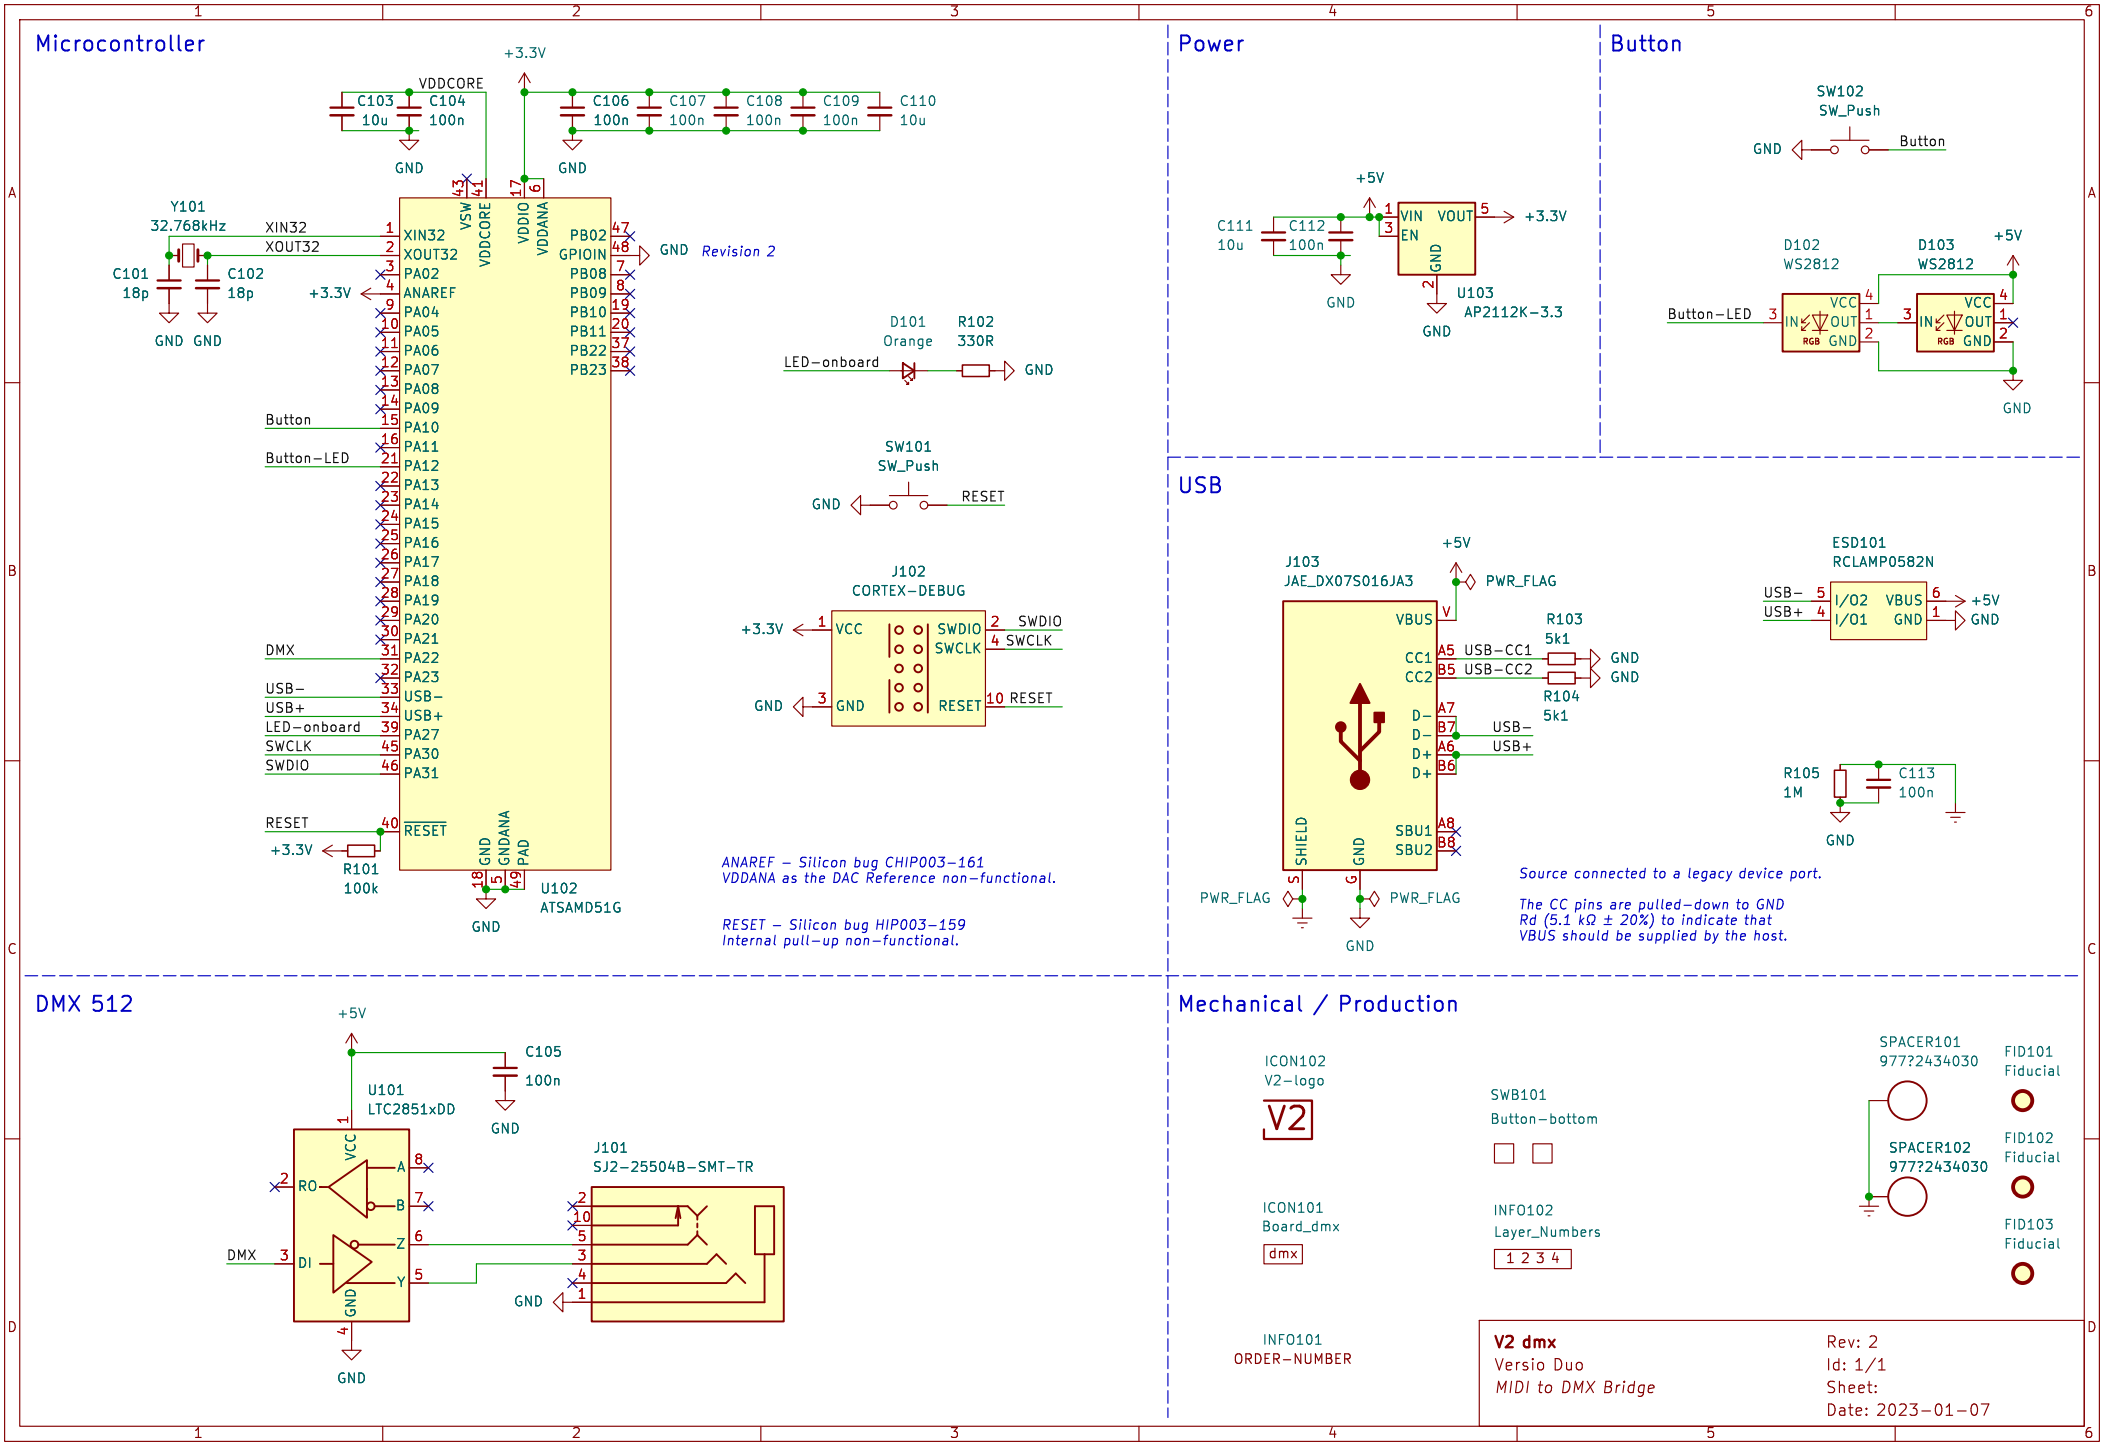
Microcontroller
+3.3V
VDDCORE
C103 10u
C104 100n
C106 100n
C107 100n
C108 100n
C109 100n
C110 10u
GND
Y101 32.768kHz
XIN32
XOUT32
C101 18p
C102 18p
GND GND
+3.3V
XIN32 1
XOUT32 2
PA02 3
ANAREF 4
PA04 9
PA05 10
PA06 11
PA07 12
PA08 13
PA09 14
PA10 15
PA11 16
PA12 21
PA13 22
PA14 23
PA15 24
PA16 25
PA17 26
PA18 27
PA19 28
PA20 29
PA21 30
PA22 31
PA23 32
USB− 33
USB+ 34
PA27 39
PA30 45
PA31 46
RESET 40
VSW 43
VDDCORE 41
VDDIO 17
VDDANA 6
PB02 47
GPIOIN 48
PB08 7
PB09 8
PB10 19
PB11 20
PB22 37
PB23 38
GND 18
GNDANA 5
PAD 49
Button
Button−LED
DMX
USB−
USB+
LED−onboard
SWCLK
SWDIO
RESET
+3.3V
R101 100k
GND
U102 ATSAMD51G
GND Revision 2
D101 Orange
R102 330R
LED−onboard
GND
SW101 SW_Push
GND
RESET
J102 CORTEX−DEBUG
+3.3V 1 VCC
GND 3 GND
SWDIO 2 SWDIO
SWCLK 4 SWCLK
RESET 10 RESET
ANAREF − Silicon bug CHIP003−161
VDDANA as the DAC Reference non−functional.
RESET − Silicon bug HIP003−159
Internal pull−up non−functional.
Power
+5V
C111 10u
C112 100n
GND
VIN 1
EN 3
VOUT 5
GND 2
+3.3V
U103 AP2112K−3.3
GND
Button
SW102 SW_Push
GND
Button
D102 WS2812
D103 WS2812
+5V
Button−LED 3
IN 1
VCC 4
OUT 1
GND 2
RGB
GND
USB
J103 JAE_DX07S016JA3
+5V
PWR_FLAG
VBUS V
CC1 A5 USB−CC1
CC2 B5 USB−CC2
R103 5k1
R104 5k1
GND
GND
D− A7
D− B7 USB−
D+ A6 USB+
D+ B6
SBU1 A8
SBU2 B8
SHIELD S
GND G
PWR_FLAG
PWR_FLAG
GND
ESD101 RCLAMP0582N
USB− 5 I/O2
USB+ 4 I/O1
VBUS 6 +5V
GND 1 GND
R105 1M
C113 100n
GND
Source connected to a legacy device port.
The CC pins are pulled−down to GND
Rd (5.1 kΩ ± 20%) to indicate that
VBUS should be supplied by the host.
DMX 512
+5V
C105 100n
GND
U101 LTC2851xDD
VCC 1
RO 2
DI 3
GND 4
A 8
B 7
Z 6
Y 5
DMX
GND
J101 SJ2−25504B−SMT−TR
2
10
5
3
4
1
GND
Mechanical / Production
ICON102 V2−logo
V2
ICON101 Board_dmx
dmx
INFO101 ORDER−NUMBER
SWB101 Button−bottom
INFO102 Layer_Numbers
1 2 3 4
SPACER101 9777?2434030
SPACER102 9777?2434030
FID101 Fiducial
FID102 Fiducial
FID103 Fiducial
V2 dmx
Versio Duo
MIDI to DMX Bridge
Rev: 2
Id: 1/1
Sheet:
Date: 2023−01−07