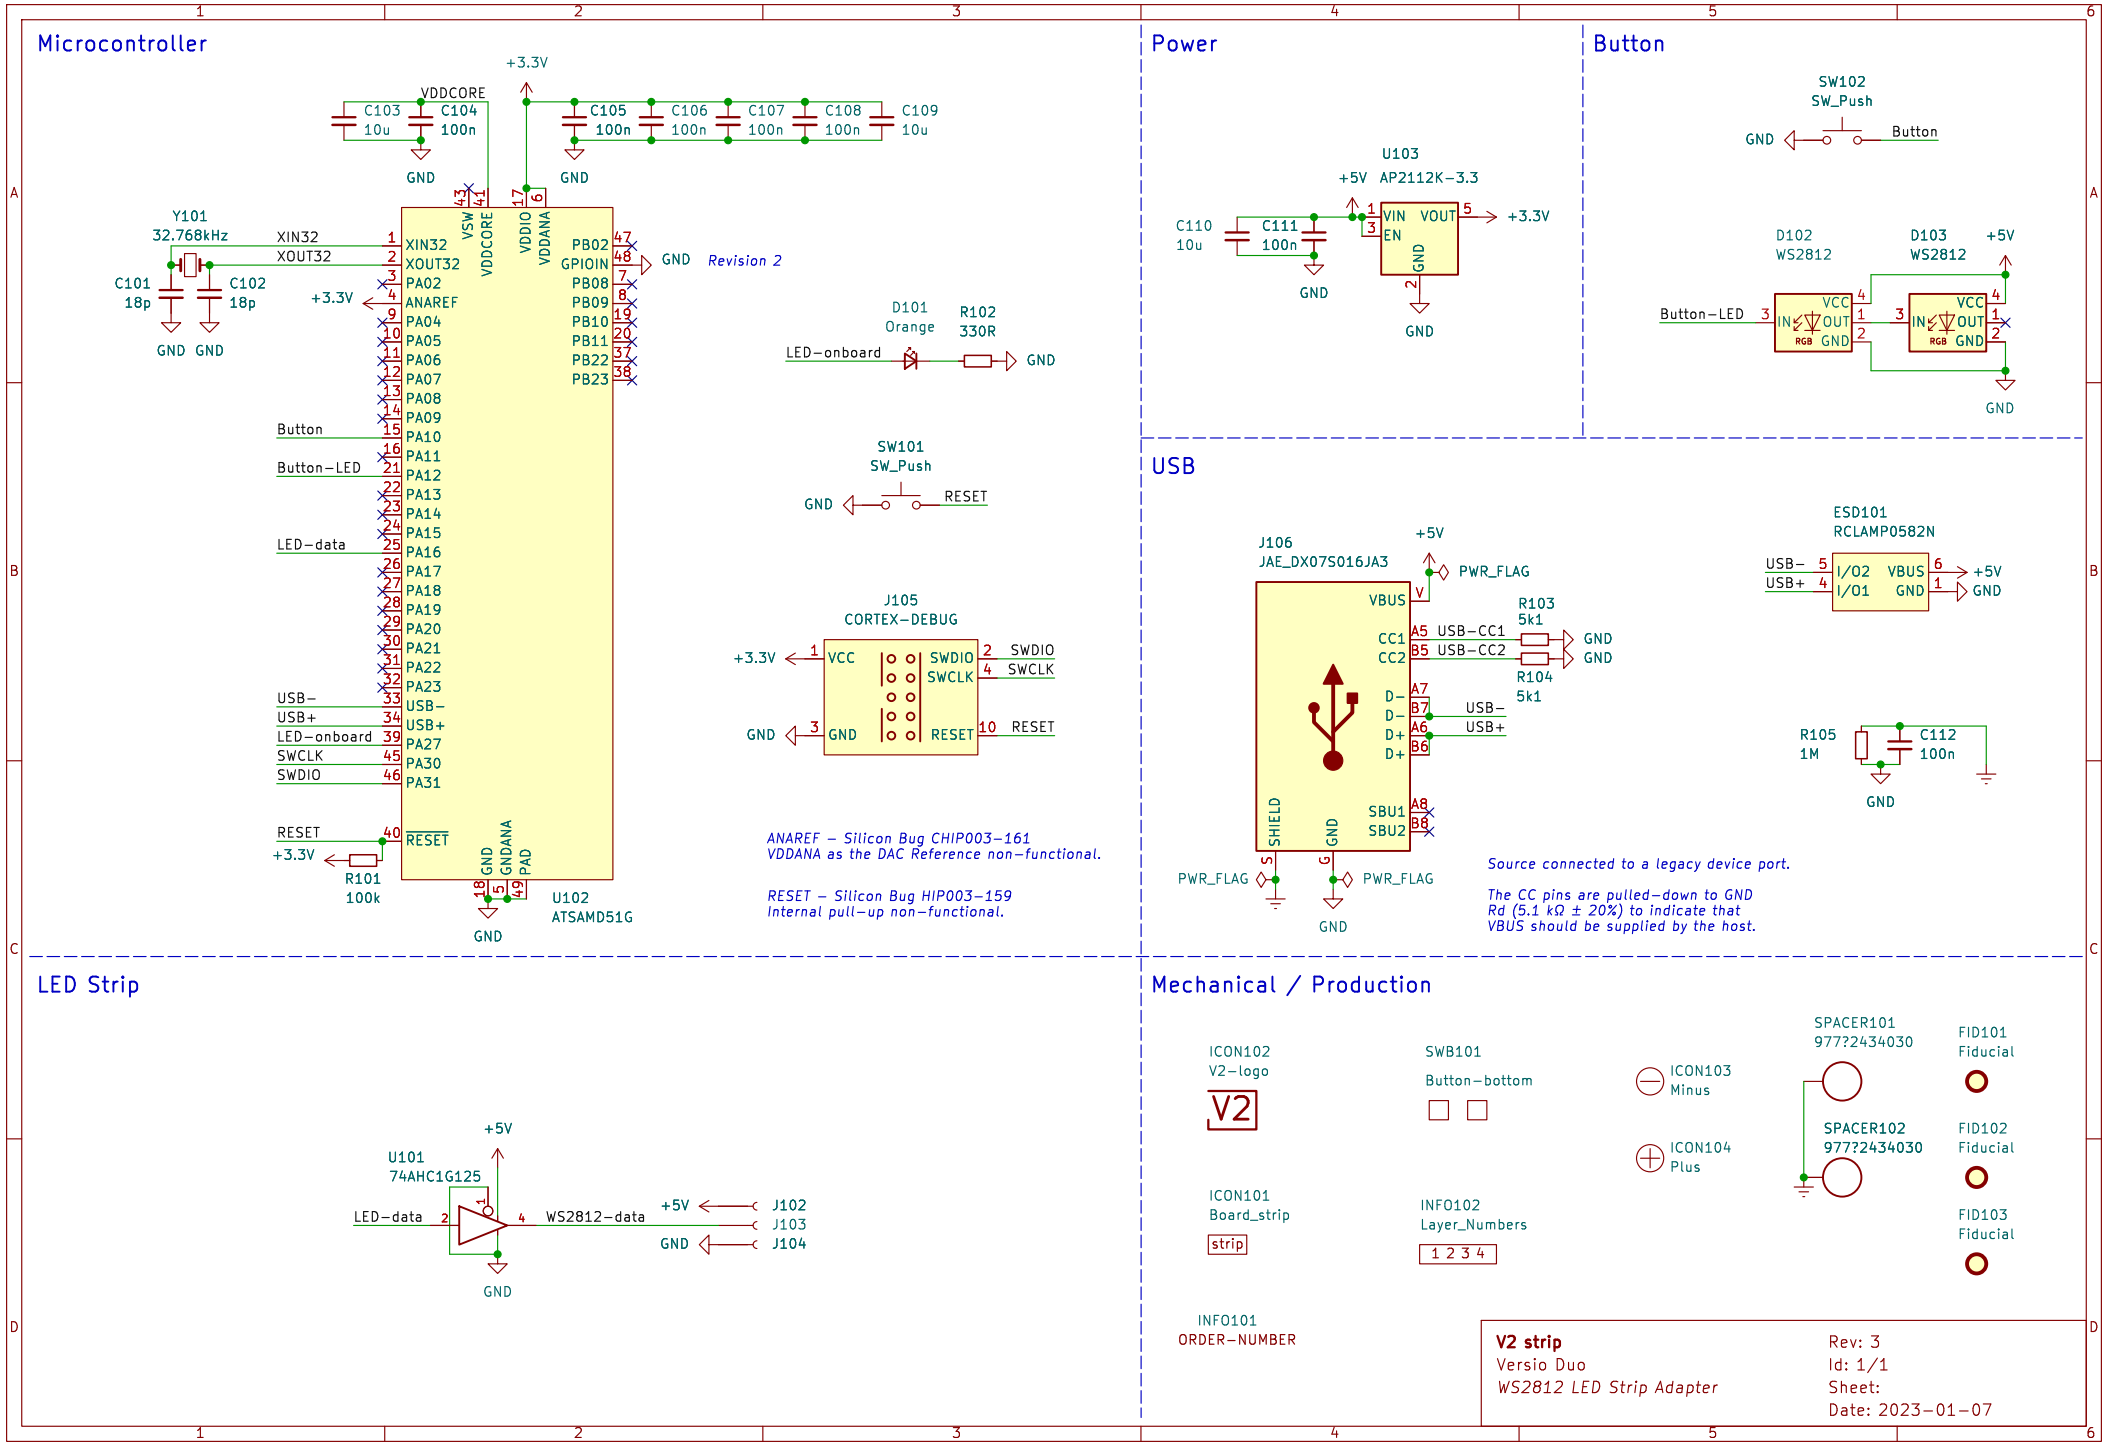
Microcontroller
+3.3V
VDDCORE
C103 10u
C104 100n
C105 100n
C106 100n
C107 100n
C108 100n
C109 10u
GND
Y101 32.768kHz
C101 18p
C102 18p
XIN32
XOUT32
ANAREF
Revision 2
D101 Orange
R102 330R
LED-onboard
SW101 SW_Push
RESET
Button
Button-LED
LED-data
USB-
USB+
SWCLK
SWDIO
R101 100k
U102 ATSAMD51G
J105 CORTEX-DEBUG
VCC
SWDIO
SWCLK
RESET
ANAREF – Silicon Bug CHIP003-161
VDDANA as the DAC Reference non-functional.
RESET – Silicon Bug HIP003-159
Internal pull-up non-functional.
Power
U103 AP2112K-3.3
+5V
VIN
VOUT
EN
C110 10u
C111 100n
Button
SW102 SW_Push
D102 WS2812
D103 WS2812
VCC
IN
OUT
RGB
USB
J106 JAE_DX07S016JA3
PWR_FLAG
VBUS
CC1
CC2
D-
D+
SHIELD
SBU1
SBU2
R103 5k1
R104 5k1
USB-CC1
USB-CC2
ESD101 RCLAMP0582N
I/O2
I/O1
R105 1M
C112 100n
Source connected to a legacy device port.
The CC pins are pulled-down to GND
Rd (5.1 kΩ ± 20%) to indicate that
VBUS should be supplied by the host.
LED Strip
U101 74AHC1G125
WS2812-data
J102
J103
J104
Mechanical / Production
ICON102 V2-logo
SWB101 Button-bottom
ICON103 Minus
ICON104 Plus
SPACER101 9772434030
SPACER102 9772434030
FID101 Fiducial
FID102 Fiducial
FID103 Fiducial
ICON101 Board_strip
INFO102 Layer_Numbers
INFO101 ORDER-NUMBER
V2 strip
Versio Duo
WS2812 LED Strip Adapter
Rev: 3
Id: 1/1
Sheet:
Date: 2023-01-07