
VIFLY WhoopStor 3

VIFLY WhoopStor 3 is the first 6 ports charger and discharger with storage function specially for 1S whoop batteries. It also comes with other outstanding features like LCD display, PH2.0 and BT2.0 compatiblity, adjustable current, etc.


Specs

Dimensions : 108*55*30mm
Input connector : XT60, DC(⊖—⊂—⊕ 5.5*2.1mm),USB-C(PD3.0)
Input voltage range : 6V-26V (XT60 2S-6S Battery, DC), 9V - 20V (USB-C)
Min input power : 40W
Max charging current : 1.3A/port
Support battery connector : PH2.0 & BT2.0
Battery type : LiPo 4.20V (±0.05V) / LiHV 4.35V(±0.05V)
Storage voltage : 3.80V (±0.05V) / 3.85V (±0.05V)
Max discharge power : 1.1W/port

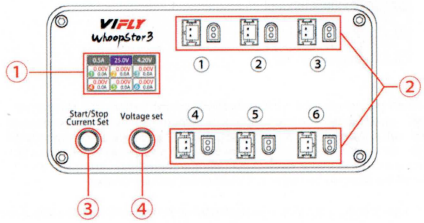


No.	Name	Description
1	LCD Display	See description on next page
2	Output	Batteries that support PH2.0 and BT2.0, but in the same group ports can't be plugged in at the same time
3	Button 1	Short press to change the charge current Long press to start or stop
4	Button 2	Short press to change target voltage. Long press to turn the buzzer on or off

LCD Display

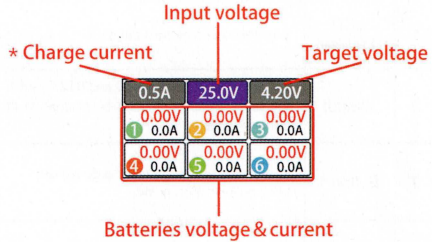

*: Only the maximum charge current can be set, the discharge current can't be set and it can't exceed 0.3A.

**: The screen will show "OK!" when charge or storage charge finished, please remove the battery in time.

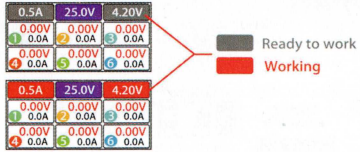

Attention

* When you connect the XT60 with 2S-6S aircraft battery, the charger will automatically determine the battery type. When the input battery voltage of each cell is lower than 3.5V, the charger will stop charge or storage charge. When each cell voltage is lower than 3.3V, the charge will turn off the LCD display and go to power save status. Pls disconnect the input battery and all the charged batteries in time to avoid battery damage

* Please choose a suitable power adapter or power bank that can effectively ensure the charging efficiency. Please try to choose an adapter or power bank with an output power greater than 40W. When the output power of the adapter or power bank is low, the charger may not work properly. In this case, please reduce the charging current or reduce the number of rechargeable batteries

* When an adapter or power bank that supports PD or QC protocol is connected to USB-C, if they can only output 9V, the charger will limit the maximum charging current to 0.6A

* Make sure the power voltage supply is compatible with this device

* Keep your hands dry when plugging or unplugging the power supply

* Keep it away from humidity and high temperature since this device will generate heat during working

*Children should not operate this device, never leave it unattended

* When charging, avoid direct sunlight and keep away from heat sources. The shell and bottom of the charger are not covered by objects, and good ventilation should be maintained

* When using or storing charger, prevent any liquid or metal particles from penetrating the charger. Beware of falling and impact to avoid damage to the charger

* Please remove each rechargeable battery in time after the power is disconnected