

RF Switch Users Manual and Assembly Instructions

**Rev 001h
02/10/22**

Designed and Produced to enhance your Amateur Radio Experience by

Team XCR

Table of Contents

1	Introduction.....	3
1.1	Amateur Radio Kit.....	3
1.2	License.....	3
1.3	Lightning.....	3
1.4	Network Security.....	4
1.5	Caveat.....	4
1.6	Isolation.....	4
2	RF Switch Assembly Instructions.....	6
2.1	PCB Assembly.....	6
2.2	PCB Testing.....	9
2.3	CPU PCB.....	10
2.3.1	CPU PCB Assembly.....	10
2.4	Mechanical Assembly.....	11
2.5	Installation in Enclosure.....	12
2.6	Bench Testing.....	13
2.6.1	WiFi Configuration.....	13
3	Install the Remote Switch.....	14
3.1	Install Station Coax.....	14
3.2	Station Bias T.....	15
3.3	LED Indicator Installation.....	15
3.4	Cable Attachment.....	15
4	Options.....	17
4.1	Optional Environmental Sensor.....	17
4.2	Ground UnSelected Antennas.....	17
4.3	High Power Operation.....	17
5	Operation.....	18
5.1	Initial Configuration.....	18
5.1.1	WiFi Configuration.....	18
5.1.2	User Customization.....	19
5.2	Factory Reset.....	20
5.3	Help.....	20
5.4	LEDs.....	20
5.4.1	CPU Power LED.....	20
5.4.2	CPU Activity and Status LED.....	20
5.4.3	External LED.....	20
6	Need Help?.....	21

1 Introduction

This project is an all-inclusive[1] Remote RF Switch (Antenna Selector) which provides a convenient way to remotely select HF antennas. The Switch uses Power-Via-Coax and WiFi (browser) for control. Thus, eliminating the need to an additional cable or control box. It provides a convenient user interface located on your existing logging PC.

The User interface is entirely via a browser. This can be a small window open on your logging PC. Simply click on the desired antenna and the connection will be made.

Additional information is displayed below the virtual buttons. Specifically, the DC voltage at the Switch and (if installed) the temperature, humidity and barometric pressure. The sensor is enclosed so the indicated values reflect the inside of the enclosure.

1.1 Amateur Radio Kit

This project is presented for amateur radio use. As such, it is a collection of parts which, when properly assembled and operated, provide a useful operating tool. If the kit assembly or operation is beyond your skill level, please return the unassembled kit for a full refund (minus shipping).

Your assembly and operation is your acknowledgment and acceptance of the risks associated with amateur radio operations and kit assembly.

If you wish to use this project for other applications, please email the details of your intended operation.

1.2 License

This project is released under terms of the TAPR Non-Commercial License. You may build units for your own use, but may not sell units for a profit without a license.

1.3 Lightning

The Switch provides **NO** lightning protection.

Let me be totally honest with you. There COULD have been some ESD devices installed but they would mostly help advertising a capability which has no basis in the real world. A few MOV's could be sprinkled around, but without a very substantial path to ground they are nearly worthless.

Protection needs to be all or nothing. Protecting from all threats is a challenge. Best practice would be to install a metal plate with Polyphasers and a VERY SOLID path to Ground. Then route the coax to the Switch. Another protection installation should be place prior to the coax entering the shack.

In the case of no user installed protection, the Switch will NOT serve as fuse for the coax to the shack. A direct strike will likely consume the switch and you will have to search for the remnants.

Protection is entirely a USER RESPONSIBILITY.

Installation of this Switch indicates your acceptance of this responsibility.

Notes

1. This switch requires external +12VDC which may be supplied via a user supplied Bias T in the shack or at the site of the Switch installation. The user is responsible for providing power. See MFJ-4116 available from various dealers.
2. Refer to <http://arrl.org> for more information on ESD protection, in particular the ARRL has books on lightning protection.
- 3.

1.4 Network Security

The switch works on your Local Area Network (LAN). There is no need to need to change any router settings to operate the Switch locally.

If you desire to operate the switch from beyond your LAN, it is necessary to modify router settings. Since this IoT device is simply designed for LAN operation, there is no provision for protecting from hackers. The same may be true for other amateur radio devices on your LAN.

If you desire to operate this IoT device from outside of your LAN, it is strongly recommended that you contact an IT professional and seek advice on providing protection for your network.

1.5 Caveat

This device is designed to switch antennas which are well matched **AT THE ANTENNA.**

Without using a Tuner, whether separate or internal to the radio, the SWR should be better than 2:1.

If your use a random wire or other antenna which is NOT 50 Ohms or has a SWR > 2:1, do NOT route the coax through this switch. The mismatch will result in high voltages which may be beyond the design parameters and may **damage the switch.**

1.6 Isolation

The measure of attenuation between switch ports (selected to unselected) is the isolation. Good isolation is only required when there are multiple RADIOS connected. The isolation prevents power from a transmitting radio from going into the receiver of another radio.

This switch is designed to switch ONLY antennas (not select from multiple radios). A single relay provides about 30db of isolation. Transmitting 1000W on antenna 1 results in 1 W going to antennas 2, 3, 4. This has essentially no impact on the intended operation.

HF antennas do not typically have big isolation (coupling from antenna 1 to antenna 2) as they are physically near each other. In a common yard, isolation may only be 20-40db.

2 RF Switch Assembly Instructions

In all cases where this text refers to “Install” components on the PCB, this indicates the the leads should be bent, the component installed on the PCB and that it be soldered. Use only the minimum of solder necessary to ensure a good connection, not a large round ball of solder.


PLEASE read the Options section as you may want to incorporate some changes to the standard build.

2.1 PCB Assembly


The Switch PCB is user assembled and requires soldering. It is important to establish the Top and Bottom of the PCB. The relays and most components are mounted on the TOP side. The SO239 are mounted to the BOTTOM side. The silk screen indicates the Top and the Bottom.

Do NOT install the SO239's at this time. They are installed on the metal shelf later in the assembly process.


1. Identify the various capacitors. Most of the caps are 0.01uF, but they have different voltage ratings.
The long strip are .01uf @ 50V. Four of these will be installed first.
The 3 large caps (C4, C9, C13) pass RF, but block the DC path in the Bias T portion of the circuit.
A single medium size cap (C17, may be orange or yellow) is used as a bypass cap after the inductor.
2 small caps (C12, C13) 6.8pF are used for impedance matching.

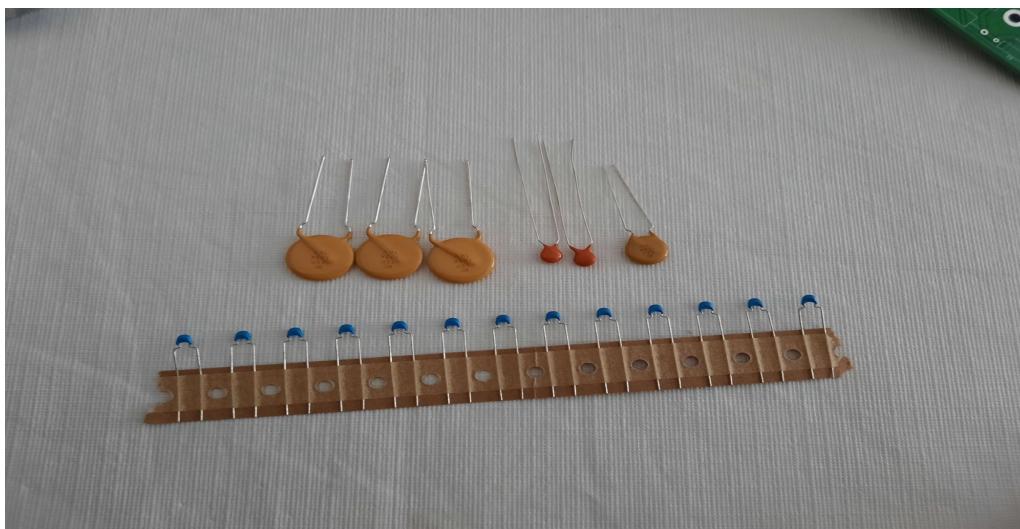

2. Install and solder 4x bypass caps (.01uf @50V) (C3,C8, C14, C20) on the Bottom side of the PCB. Apply a small amount of solder to the bottom side. After soldering, clip the Top side leads flush with the PCB as the relay will be mounted over the pads. Do not use a large amount of solder on the top side.

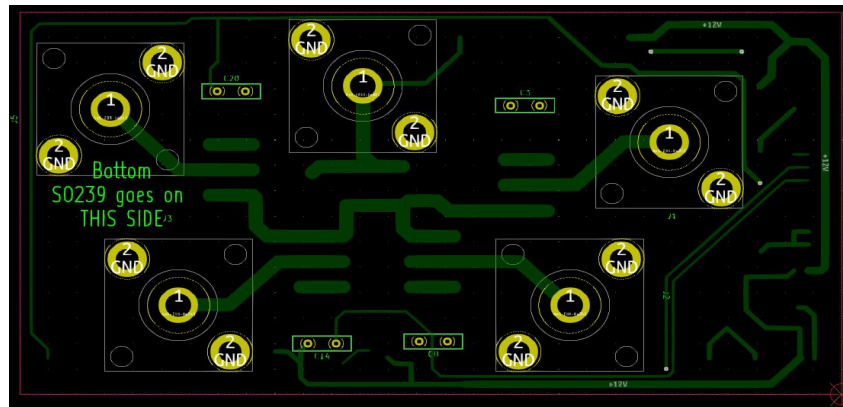


3. Install and solder the relay coil **bypass caps** (.01uf @50V) on the TOP side of the PCB. These should be installed tight to the PCB and not interfere with the relay mounting.

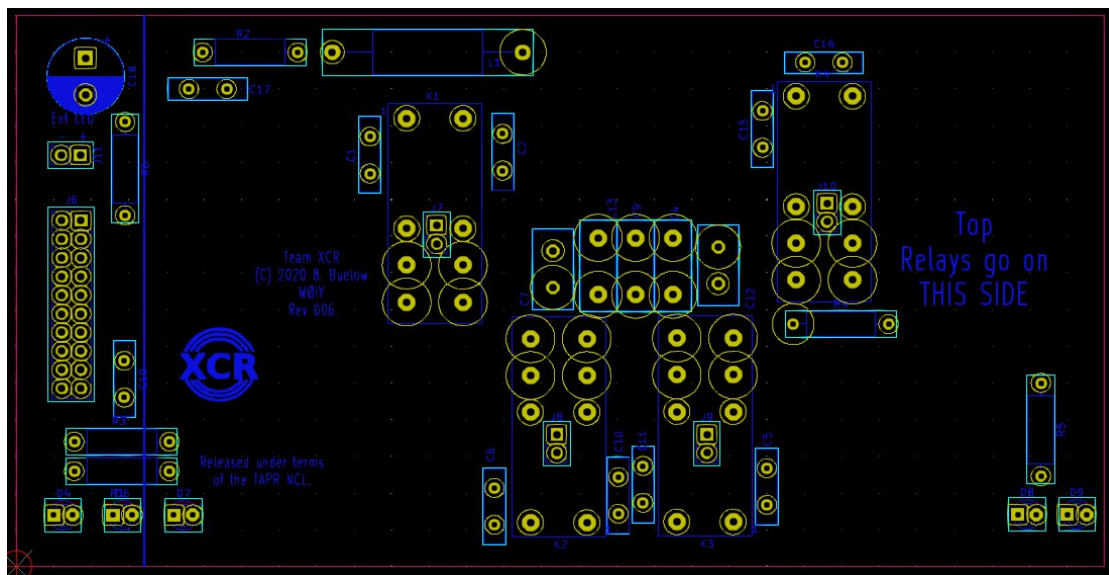

6. Do NOT NOT NOT install shunt caps (6.8pf 2x) (C7, C12) near the Top center of the PCB. These are NOT required as the PCB impedance is near 50 Ohms.
7. Install LED dropping resistors (1.8K 3x) on the Top side of the PCB.
R5 on the lower right
R3 on lower left
R1 immediately below R3
8. Install and solder the LEDs (5x).
NOTE – LEDs are polarized and need to be installed properly:
SHORT lead goes in the SQUARE pad
LONG lead goes in the ROUND pad
9. Install and solder J6 2x10 Female straight header connector.
10. Install and solder the relays (G2LR 4x) on the Top side of the PCB.

NOTE – check the section on Options (Section 4.2) if you do NOT want unused antennas to get Grounded.

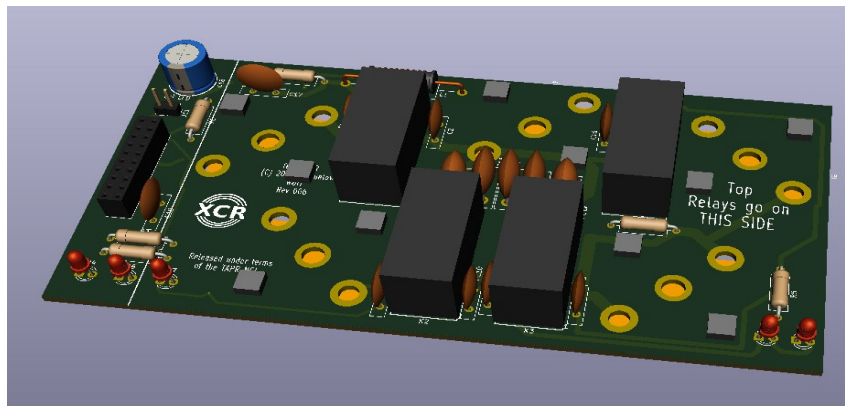

2.2 PCB Testing

Do NOT install the Control PCB!

Note that J6 is on the Top Left of the PCB. Pin 1 is at the Top of the connector on the Inside. It has a square pad. Pin numbers are arranged:

2 1
4 3

1. Apply +12VDC via J6-19/20(+) and Ground J6-13/14/15/16.
This should illuminate 1 LED (Power indicator).
If the LED does not illuminate, check the voltage and polarity of the test power leads.


2. Prepare a 4" jumper wire with male pin on both ends.
3. Attach one side to Gnd (J6-19/20), momentarily connect the other end to J6-1 to engage Relay 1 and illuminate the associated LED D6.
4. Repeat using pin 3 for Relay 2 and LED D7
5. Repeat using pin 5 for Relay 3 and LED D8
6. Repeat using pin 7 for Relay 4 and LED D9

If you can hear the relay, but the LED doesn't illuminate, the LED may be installed backwards.

2.3 CPU PCB

The Control comes mostly assembled, programmed and tested. You may have to install the male 90 degree header.

PLEASE PLEASE PLEASE USE CAUTION when handling the Control as *it is static sensitive.*

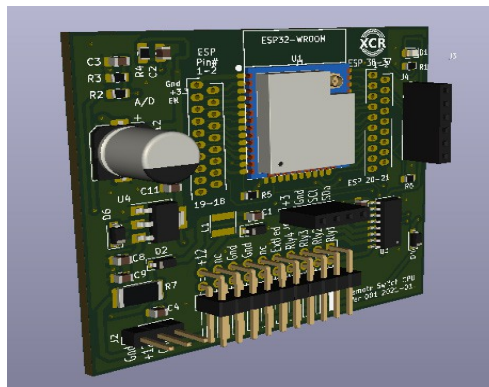

2.3.1 CPU PCB Assembly

Install the 2x10 pin header by placing the shorter pins into the PCB. The black plastic should be positioned as shown in the figure.


1. Align the pins parallel with the PCB surface and Solder one pin.
Examine the pin alignment. If necessary briefly heat the previously soldered pin and adjust the alignment.
When it is correct solder the other pins.
2. Install the cable from the WiFi antenna to the CPU. Carefully align the small connector and snap it into place. This should be done once. The connector is fragile and is a surface mount device. Be Gentle!

2.4 Mechanical Assembly

1. Mount the 5x SO239s to the chassis using #4-40 x 1/4" screws (the slightly longer of the 2 sizes provided) and 4-40 x 1/4" hex posts.


Carefully examine the following figure for proper placement of the SO239 body.
The SO239 body must be mounted flush on the TOP side of the shelf.

GENTLY tighten the hex post. It may be necessary to adjust the connector position later.
The SO239 body goes on the PCB (top) side of the shelf. The photo shows a view from the Bottom. .



This view is of the BOTTOM.

2. When all SO239 are installed, place the assembled PCB over the SO239s. You may find that not all of them are aligned. Adjust the SO239 as necessary and use a screw driver and nut driver to tighten the screws through the shelf and connectors. 10X
3. Mount the assembled PCB using #4-40 - 3/16" screws (slightly shorter than 1/4")
Tighten all of the screws top and bottom side. 20X

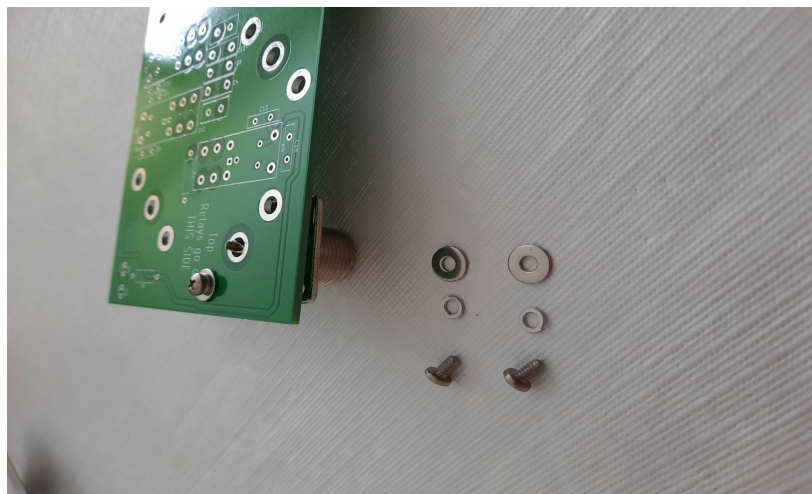


< needs a different photo with SO239 on shelf and PCB above it ?????????????????? >

4. Solder the SO239 Center Pin to the PCB. Depending on the alignment, you may need to use a short piece of wire to bridge the gap from the center pin to the PCB ring. A short piece of #14 copper is suggested. Insert one end into the SO239 solder cup and the other onto the PCB ring. Bend the PCB end into an arc around the center pin.

Do NOT apply a large amount of solder to bridge a gap as this will just run down and lay on the connector insulation. Potentially causing a path to Ground.

2.5 Installation in Enclosure

1. Remove power from the Switch.
Observing Anti-Static precautions, carefully remove the Control assembly.
2. Install the completed assembly into the enclosure. The screw holes should align with a slot near the top of the enclosure.

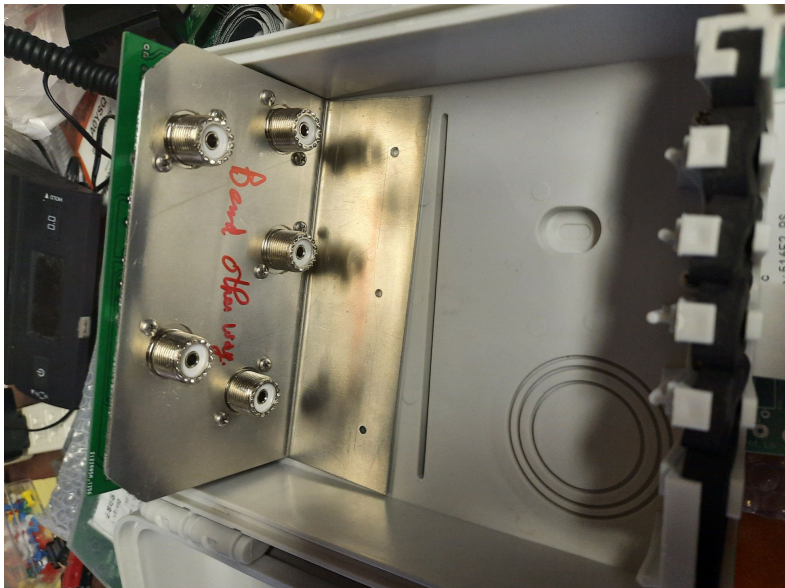

3. Use the pointed metal screws (2X) to attach the shelf assembly to the enclosure. DO NOT OVER TIGHTEN as you will strip the plastic. Do NOT use longer screws which may penetrate the rear of the enclosure and allow moisture to enter.
4. Verify that the Switch assembly is NOT powered.

5. Install the CPU PCB by plugging it into the socket on the Switch assembly. Look at the notations on both PCB to ensure it is facing the correct direction. The large metal CPU should be on the side **OPPOSITE** the relays.
There is NO keying in this connector.

2.6 Bench Testing

This step is to establish a connection to the RF Switch via WiFi.

This step is easiest to perform using a phone or tablet [1].

1. Apply power to the RF Switch either directly to the RF PCB or using the Bias T. Observe the main power LED is illuminated.
2. Have your phone search for available WiFi signals. One will be RF Switch. Select this Access Point.
3. Once connected, go to your browser and in the window for the URL, enter: **192.168.4.1** The browser should display the RF Switch Main Menu.

Note:

1. Some Apple iPhone users have difficulty with this step as the RF Switch does not provide internet connectivity as would usually be the case when connecting to a WiFi hotspot or router. If you have trouble, try using a (non-Apple) phone, tablet or laptop.

2.6.1 WiFi Configuration

Refer to Section 5.1.1 for addition commentary on WiFi Configuration.

1. Apply +12VDC to the Switch assembly.
The primary means of providing power is via a Bias T (not supplied but available separately) or for testing, apply +12V to the LEFT side of L1.
The main power LED should illuminate.
2. After a brief startup period, the LED on the Control assembly should blink at a steady rate.
During startup, each of the relays will be momentarily engaged. This will also illuminate the associated LED on the Switch assembly.
3. Using a cellphone or laptop with WiFi capability, look for the WiFi signal with the SSID of "Switch". Connect to this device.
4. You will now need to load the SSID and Password for your WiFi router. These are case sensitive!
5. Save the entry
6. Remove power from the Switch.

7. Wait 10 seconds.
8. Apply +12VDC
9. The Control will now connect to your WiFi LAN.
During the connection process, the CPU LED will be on steady.
Once connected, the CPU LED will blink.

On your PC, go to the web page for you router and look for connected nodes. One of these will be the Switch. Click on that node or copy the IP address. (It will look something like “192.168.1.123”)

1. Using your standard web browser, go to the IP address of the Switch. This is done by entering the IP address into the URL box and hit ENTER.
2. You should see the Web Page. Select any one of the antennas. The associated LED should illuminate. Test each of the virtual buttons.
3. You can use an Ohm meter to test the connection through the switch.

3 Install the Remote Switch

Determine a location for the Switch. Mount the enclosure using the top and bottom mounts. A piece of treated weather resistant plywood would make a suitable mount. Place the switch near the top of the wood panel and provide strain reliefs below it.

3.1 Install Station Coax

All coax cables entering/exiting the switch should have a 1 turn loop in the external coax cable and be attached to a suitable structure with a strain relief. The switch is alone is NOT a suitable mechanical structure to support long coax runs to dipoles and long wire antennas. The external loop assists in preventing moisture intrusion and provides some value for lightning protection.

The coax from the station MUST be connected to the proper SO239. It is the center connector in the back row. See the photo.

< insert pix >??????????

RG58 and RG8X will easily flex and allow attachment to the switch SO239s. RG8 and LMR are more rigid. These will take some effort to form within the enclosure. Route the more rigid cables to the more central connectors.

3.2 Station Bias T

Install a Bias T in the shack. NOTE the orientation of the device to route the +12VDC to the remote Switch (NOT INTO THE RIG!!!)

Apply +12VDC to the Bias T. The Switch should then power up and be available via you browser.

Do NOT apply a higher voltage to the Bias T as the Switch only needs 12v for the relays and a 3 terminal regulator makes 3.3v for the CPU.

There is over voltage protection in the switch which may be activated above +14VDC.

3.3 LED Indicator Installation

If the remote Switch is visible from the shack, you may chose to install the Blue LED.

1. Add small diameter Red/Black wires (not provided) to the 5mm LED. The wires should allow the LED to be placed out the about 1" out the bottom of the enclosure. Insulate the leads all the way to the LED plastic body to prevent shorts.
Black wire to LONG LED lead
Red wire to SHORT LED lead
2. Connect the Red/Black wires) from the LED to the Switch PCB J11 located near C18.
Note the polarity must be correct or the LED may be damaged.
3. Install the LED into the clear tubing (not provided).??????
4. < insert pix >????????????????
5. Route the wire through the bottom moisture barrier and orient the LED to point towards the shack. When the user commands the Switch to change antennas, the LED will blink the number of times associated with the selected antenna. Once for antenna 1. Twice for antenna 2, etc.

3.4 Cable Attachment

Attach the antenna coaxial cables through the bottom moisture barriers and attach to the desired position.

Provide a strain relief for the coax about 8-10" below the Switch to prevent the weight of the coax from pulling on the connections.

It is good practice to add 1-2 turns of the coaxial cable into a loop below the strain relief. This can have some minor positive effect for lightning. Polyphasor or other devices should be installed per recommended electrical codes and best practices.

A heavy ground wire, attached to a well installed ground rod may be connected to the shelf bracket. This SHOULD NOT be the primary grounding method for the tower.

4 Options

4.1 *Optional Environmental Sensor*

This is an optional small PCB that plugs into the Control. It senses temperature, humidity and barometric pressure. These parameters will be displayed on the web page when the sensor is installed. As the sensor is in the enclosure, it will read the internal temperature, humidity and pressure.

4.2 *Ground UnSelected Antennas*

By default, the UnSelected antennas are tied to Ground. When Power is removed, all antennas are tied to Ground. This may be appropriate if you are switching the phase of an array.

IMPORTANT → Carefully read the section on Lightning!

If you wish to NOT have the antenna grounded, you can drill out the holes for the Normally Closed relay pads PRIOR TO INSTALLING THE RELAYS. The relay is SPDT with each relay element (NO, NC, Com) connected to 2 pins. You MUST open BOTH pads of the NC contact to eliminate the connection to Ground.

Using a .25" drill bit, by hand, carefully remove a small amount of copper pad around BOTH the TOP and BOTTOM of the PCB. Do NOT drill through the board. This operation is very easily done and does NOT require the use of a power tool! Be sure to make a substantial gap, not just a thin cut.

You should be able to solder a wire to the normally closed contacts if you have special phasing requirements.

4.3 *High Power Operation*

The relays are rated for 16A, which equates to 12.8KW. The PCB is NOT rated for 12.8KW.

If you intend to operate above 1.KW, you may want to add extra current carrying capability to the PCB. This can be done by placing a section of bare #14 wire across the PCB trace and soldering to the relay terminals and SO239 center pin. Avoid sharp points on the ends of the wire.

5 Operation

5.1 Initial Configuration

The following steps will configure the RF Switch to your LAN and shack.

5.1.1 WiFi Configuration

The WiFi configuration consists of entering your credentials: SSID, password, etc. These are then stored in memory on the CPU board. You should only need to do this once.

It is important to enter ALL of the data on the WiFi Config page as the data is all stored as a set. If you leave a field blank, the file will be created with no data for that parameter. This may cause the CPU to be unable to connect to your LAN. If the WiFi LAN connection fails, the CPU will revert to Access Point mode and you will be able to access the RF Switch via your phone, tablet or laptop.

The following table list the parameters you will need to connect to a LAN.

Parameter	Example	Comment
SSID	W0iylan	UPPER/lower case matters! You can find the SSID by accessing you LAN router or buy scanning WiFi with a phone app.
Password	Abc123	This is the WiFi password. It is configured in your router WiFi setup. It may or may not be the same as your router admin access password.
Gateway	192.168.1.1	This is the IP address inside your router. For most folks 192.168.1.1 is the correct number. Network savy folks may have established a different IP address (like 10.10.10.1
SubnetMask	255.255.255.0	For 99.9% of users, the example is the correct answer.
DHCP	OFF	If you want the router to assign a IP address for the RF Switch, enable this and then omit Gateway and Subnet Mask. You will have to go into your router table to find the IP address which was assigned.

5.1.2 User Customization

Users can enter their callsign and antenna names. Each is stored individually in CPU memory and will be retained. The strings are limited to 25 characters. UPPER/lower, numbers and figures are all ok.

Program Update

A new addition to the RF Switch is the ability to update the software via WiFi. You need to have your browser open to the Main Menu. The URL at the top will be the IP address of the RF Switch. For this example it will be 192.168.1.1

Your stored credentials are not affected by this update.

Procedure:

1. Using your PC browser, go to <https://github.com/team-xcr> (or <https://github.com/w0iy>)
<https://github.com/w0iy/4-Way-RF-Switch>
2. Navigate to the 4 Way RF Switch repository
3. Select the file 4WayRFSxxxx.bin
This is a binary file compiled for the RFW CPU.
Download the file and remember where it is located (sub-directory)
4. In the PC browser, go the RFS Main Menu.
The URL will show 192.168.1.1/index.html
5. Edit the URL to be: 192.168.1.1/update and hit Enter
6. The page will update to show the Elegant OTA page.
Select the FIRMWARE button
Select Browse
<<< insert pic >>>>
7. This will open a window with FILE EXPLORER.
Navigate to the directory containing the .bin file you downloaded.
<<< insert pic >>>>
8. Double click on the bin file.
The OTA feature will begin to upload the file. It takes about 15 seconds.
Wait for the BACK button to appear.
9. Using the Browser BACK arrow, return to the Main Menu.

At this point the CPU will reset and begin to operate with the newly loaded software. All of your custom data will be retained. There is some chance the CPU will not return to LAN mode after a update. You may have to cycle power or reset the RFS once or twice before it returns to LAN mode.

You may retain .bin files and load a previous version if you desire. There is no configuration function to prohibit this process.

5.2 Factory Reset

This page allows you to erase the contents of the WiFi Configuration. If you change WiFi credentials or wish to use the RFS without a LAN, you may erase the data.

Note that if you operate the RFS away from your LAN, the device will attempt to connect, fail and switch to Access Point mode. When you return home, the LAN will be connected automatically.

5.3 Help

This page has a minimal description which may be useful. There are also links which you may select to go to the Team-XCR web page (provided you have an internet connection).

5.4 LEDs

There are several LEDs on the RFS which convey different information.

5.4.1 CPU Power LED

This GREEN LED indicates that power is applied to the CPU PCB. It should be moderately bright. If it is dim or flickers, check the power source to the RFS.

5.4.2 CPU Activity and Status LED

As an indicator of CPU activity, the BLUE LED blinks every 3-5 seconds. This indicates the CPU is alive and performing as intended.

When the user selects an antenna, the BLUE LED illuminates for about 2 seconds, followed by brief flashes indicating the number of the antenna selected (1, 2, 3, 4). After a few seconds delay, the LED returns to showing normal activity blinks.

5.4.3 External LED

The external LED operation is identical to the BLUE activity LED when an antenna selection is made. There is no “activity” flash as this may attract unwanted attention to the RFS. If no external LED is desired, simply omit the installation of the device.

6 Need Help?

Please email questions to: barry.wØiy@gmail.com

You can expect an answer in less than 24 hrs.

Start a Groups.io for support and discussion

4:1 RF Switch Kit

Remotely Deployable, Fully Enclosed
WiFi Control
Power of Coax

This is a very simple kit to assemble. All user-installed parts are Through-Hole-Technology (THT). Soldering required. There is mechanical assembly of the RF connectors and installation into the weather resistant enclosure. All documents are available online and include photos and testing procedures.

The CPU board is **SMD** and comes **completely assembled** and pre-programmed.

Setup is easy: Use your phones browser to enter your LAN SSID and Password.

Operation is simple.

1. Open a browser
2. Connect to the Switch
3. Click to Select

<insert photo of browser>

<insert pix of enclosure collage>

<insert pix of parts>