

Development, simulation & implementation of precoding techniques for satellite links

Wannes Baes

Student number: 02011242

Supervisor: Prof. dr. ir. Nele Noels

Counsellor: Dr. ir. Rodrigo Moraes (Antwerp Space)

Master's dissertation submitted in order to obtain the degree of Master of Science in Computer Science Engineering

Academic year 2025-2026

This master's dissertation is part of an exam. Any comments formulated by the assessment committee during the oral presentation of the master's dissertation are not included in this text.

The author gives permission to make this master's dissertation available for consultation and to copy parts of this master's dissertation for personal use. In the case of any other use, the copyright terms have to be respected, in particular with regard to the obligation to state expressly the source when quoting results from this master's dissertation.

Ghent, May 2026

Wannes Baes

Acknowledgements

Laboris magna irure quis sit et veniam voluptate duis elit esse do excepteur. Officia laboris adipisicing laboris duis ut cillum aliquip. Do veniam aute non do cillum sit pariatur consectetur adipisicing qui. Lorem Lorem veniam minim exercitation cupidatat tempor do aute dolore. Nostrud adipisicing tempor quis qui fugiat sint quis ut aute eiusmod Lorem enim veniam. Elit labore Lorem do proident amet anim exercitation culpa enim cillum qui. Aliquip reprehenderit commodo labore minim laborum mollit ut veniam in irure. Minim sit in non aliqua ut elit veniam irure pariatur non velit consequat. Cupidatat veniam occaecat culpa eu irure aute consectetur dolore culpa deserunt quis officia do. Aliqua aliqua eu velit excepteur culpa ea dolore occaecat. Ea est cillum nulla ea cupidatat esse adipisicing ut. Cillum amet esse ex ex enim elit excepteur ullamco in qui aliqua Lorem veniam. Sunt consectetur aliquip commodo exercitation pariatur id tempor adipisicing aliqua. Fugiat cillum ea irure laborum consectetur ipsum. Excepteur laboris eu veniam ex ad consequat esse id ullamco ea cupidatat ad nisi. Aute nisi velit excepteur adipisicing dolore pariatur sunt. Dolore mollit cupidatat esse sint ipsum est nulla nisi eu cupidatat excepteur sint cillum. Culpa irure magna culpa eiusmod ut nisi ipsum veniam elit est occaecat veniam. Sunt adipisicing eu minim qui ea laboris ullamco ut. Aliquip occaecat in occaecat ut tempor dolore sunt consequat qui cillum reprehenderit. Voluptate commodo cupidatat ullamco sint aliquip veniam consequat do. Nisi velit excepteur aute laboris aliqua fugiat minim occaecat quis non incididunt.

Development, simulation & implementation of precoding techniques for satellite links

by

WANNES BAES

Master's dissertation submitted in order to obtain the academic degree of Master of Science in
Computer Science Engineering

Supervisor: Prof. Dr. ir. Nele Noels

Counsellor: Dr. ir. Rodrigo Moraes (Antwerp Space)

Ghent University

Faculty of Engineering and Architecture

Department of Telecommunications and Information Processing

Abstract — Laboris magna irure quis sit et veniam voluptate duis elit esse do excepteur. Officia laboris adipisicing laboris duis ut cillum aliquip. Do veniam aute non do cillum sit pariatur consectetur adipisicing qui. Lorem Lorem veniam minim exercitation cupidatat tempor do aute dolore. Nostrud adipisicing tempor quis qui fugiat sint quis ut aute eiusmod Lorem enim veniam. Elit labore Lorem do proident amet anim exercitation culpa enim cillum qui. Aliquip reprehenderit commodo labore minim laborum mollit ut veniam in irure. Minim sit in non aliqua ut elit veniam irure pariatur non velit consequat. Cupidatat veniam occaecat culpa eu irure aute consectetur dolore culpa deserunt quis officia do. Aliqua aliqua eu velit excepteur culpa ea dolore occaecat. Ea est cillum nulla ea cupidatat esse adipisicing ut. Cillum amet esse ex ex enim elit excepteur ullamco in qui aliqua Lorem veniam. Sunt consectetur aliquip commodo exercitation pariatur id tempor adipisicing aliqua. Fugiat cillum ea irure laborum consectetur ipsum. Excepteur laboris eu veniam ex ad consequat esse id ullamco ea cupidatat ad nisi. Aute nisi velit excepteur adipisicing dolore pariatur sunt. Dolore mollit cupidatat esse sint ipsum est nulla nisi eu cupidatat excepteur sint cillum. Culpa irure magna culpa eiusmod ut nisi ipsum veniam elit est occaecat veniam. Sunt adipisicing eu minim qui ea laboris ullamco ut. Aliquip occaecat in occaecat ut tempor dolore sunt consequat qui cillum reprehenderit. Voluptate commodo cupidatat ullamco sint aliquip veniam consequat do. Nisi velit excepteur aute laboris aliqua fugiat minim occaecat quis non incididunt.

Keywords — Precoding Techniques, High-Troughput Satellite Communications, multiple-input multiple-output (MIMO), imperfect channel state information (CSI)

Development, simulation & implementation of precoding techniques for satellite links

Wannes Baes

Supervisor: Prof. Dr. ir. Nele Noels (Ghent University)

Counsellor: Dr. ir. Rodrigo Moraes (Antwerp Space)

Abstract—This document is a model and instructions for L^AT_EX. This and the IEEEtran.cls file define the components of your paper [title, text, heads, etc.]. ***CRITICAL: Do Not Use Symbols, Special Characters, Footnotes, or Math in Paper Title or Abstract.**

Index Terms—component, formatting, style, styling, insert

I. INTRODUCTION

This document is a model and instructions for L^AT_EX. Please observe the conference page limits.

II. EASE OF USE

A. Maintaining the Integrity of the Specifications

The IEEEtran class file is used to format your paper and style the text. All margins, column widths, line spaces, and text fonts are prescribed; please do not alter them. You may note peculiarities. For example, the head margin measures proportionately more than is customary. This measurement and others are deliberate, using specifications that anticipate your paper as one part of the entire proceedings, and not as an independent document. Please do not revise any of the current designations.

III. PREPARE YOUR PAPER BEFORE STYLING

Before you begin to format your paper, first write and save the content as a separate text file. Complete all content and organizational editing before formatting. Please note sections III-A–III-E below for more information on proofreading, spelling and grammar.

Keep your text and graphic files separate until after the text has been formatted and styled. Do not number text heads—L^AT_EX will do that for you.

A. Abbreviations and Acronyms

Define abbreviations and acronyms the first time they are used in the text, even after they have been defined in the abstract. Abbreviations such as IEEE, SI, MKS, CGS, ac, dc, and rms do not have to be defined. Do not use abbreviations in the title or heads unless they are unavoidable.

B. Units

- Use either SI (MKS) or CGS as primary units. (SI units are encouraged.) English units may be used as secondary units (in parentheses). An exception would be the use of English units as identifiers in trade, such as “3.5-inch disk drive”.
- Avoid combining SI and CGS units, such as current in amperes and magnetic field in oersteds. This often leads to confusion because equations do not balance dimensionally. If you must use mixed units, clearly state the units for each quantity that you use in an equation.
- Do not mix complete spellings and abbreviations of units: “Wb/m²” or “webers per square meter”, not “webers/m²”. Spell out units when they appear in text: “. . . a few henries”, not “. . . a few H”.
- Use a zero before decimal points: “0.25”, not “.25”. Use “cm³”, not “cc”).

C. Equations

Number equations consecutively. To make your equations more compact, you may use the solidus (/), the exp function, or appropriate exponents. Italicize Roman symbols for quantities and variables, but not Greek symbols. Use a long dash rather than a hyphen for a minus sign. Punctuate equations with commas or periods when they are part of a sentence, as in:

$$a + b = \gamma \quad (1)$$

Be sure that the symbols in your equation have been defined before or immediately following the equation. Use “(1)”, not “Eq. (1)” or “equation (1)”, except at the beginning of a sentence: “Equation (1) is . . .”

D. L^AT_EX-Specific Advice

Please use “soft” (e.g., `\eqref{Eq}`) cross references instead of “hard” references (e.g., (1)). That will make it possible to combine sections, add equations, or change the order of figures or citations without having to go through the file line by line.

Please don’t use the `{eqnarray}` equation environment. Use `{align}` or `{IEEEeqnarray}` instead. The `{eqnarray}` environment leaves unsightly spaces around relation symbols.

Please note that the `{subequations}` environment in $\LaTeX$ will increment the main equation counter even when there are no equation numbers displayed. If you forget that, you might write an article in which the equation numbers skip from (17) to (20), causing the copy editors to wonder if you’ve discovered a new method of counting.

BibTeX does not work by magic. It doesn’t get the bibliographic data from thin air but from .bib files. If you use BibTeX to produce a bibliography you must send the .bib files.

$\LaTeX$ can’t read your mind. If you assign the same label to a subsubsection and a table, you might find that Table I has been cross referenced as Table IV-B3.

$\LaTeX$ does not have precognitive abilities. If you put a `\label` command before the command that updates the counter it’s supposed to be using, the label will pick up the last counter to be cross referenced instead. In particular, a `\label` command should not go before the caption of a figure or a table.

Do not use `\nonumber` inside the `{array}` environment. It will not stop equation numbers inside `{array}` (there won’t be any anyway) and it might stop a wanted equation number in the surrounding equation.

E. Some Common Mistakes

- The word “data” is plural, not singular.
- The subscript for the permeability of vacuum μ_0 , and other common scientific constants, is zero with subscript formatting, not a lowercase letter “o”.
- In American English, commas, semicolons, periods, question and exclamation marks are located within quotation marks only when a complete thought or name is cited, such as a title or full quotation. When quotation marks are used, instead of a bold or italic typeface, to highlight a word or phrase, punctuation should appear outside of the quotation marks. A parenthetical phrase or statement at the end of a sentence is punctuated outside of the closing parenthesis (like this). (A parenthetical sentence is punctuated within the parentheses.)
- A graph within a graph is an “inset”, not an “insert”. The word alternatively is preferred to the word “alternately” (unless you really mean something that alternates).
- Do not use the word “essentially” to mean “approximately” or “effectively”.
- In your paper title, if the words “that uses” can accurately replace the word “using”, capitalize the “u”; if not, keep using lower-cased.
- Be aware of the different meanings of the homophones “affect” and “effect”, “complement” and “compliment”, “discreet” and “discrete”, “principal” and “principle”.
- Do not confuse “imply” and “infer”.
- The prefix “non” is not a word; it should be joined to the word it modifies, usually without a hyphen.
- There is no period after the “et” in the Latin abbreviation “et al.”.

- The abbreviation “i.e.” means “that is”, and the abbreviation “e.g.” means “for example”.

An excellent style manual for science writers is [1].

F. Authors and Affiliations

The class file is designed for, but not limited to, six authors. A minimum of one author is required for all conference articles. Author names should be listed starting from left to right and then moving down to the next line. This is the author sequence that will be used in future citations and by indexing services. Names should not be listed in columns nor group by affiliation. Please keep your affiliations as succinct as possible (for example, do not differentiate among departments of the same organization).

G. Identify the Headings

Headings, or heads, are organizational devices that guide the reader through your paper. There are two types: component heads and text heads.

Component heads identify the different components of your paper and are not topically subordinate to each other. Examples include Acknowledgments and References and, for these, the correct style to use is “Heading 5”. Use “figure caption” for your Figure captions, and “table head” for your table title. Run-in heads, such as “Abstract”, will require you to apply a style (in this case, italic) in addition to the style provided by the drop down menu to differentiate the head from the text.

Text heads organize the topics on a relational, hierarchical basis. For example, the paper title is the primary text head because all subsequent material relates and elaborates on this one topic. If there are two or more sub-topics, the next level head (uppercase Roman numerals) should be used and, conversely, if there are not at least two sub-topics, then no subheads should be introduced.

H. Figures and Tables

a) Positioning Figures and Tables: Place figures and tables at the top and bottom of columns. Avoid placing them in the middle of columns. Large figures and tables may span across both columns. Figure captions should be below the figures; table heads should appear above the tables. Insert figures and tables after they are cited in the text. Use the abbreviation “Fig. 1”, even at the beginning of a sentence.

TABLE I
TABLE TYPE STYLES

Table Head	Table Column Head		
	Table column subhead	Subhead	Subhead
copy	More table copy ^a		

^aSample of a Table footnote.

Figure Labels: Use 8 point Times New Roman for Figure labels. Use words rather than symbols or abbreviations when writing Figure axis labels to avoid confusing the reader. As an example, write the quantity “Magnetization”, or “Magnetization, M”, not just “M”. If including units in the label, present



Fig. 1. Example of a figure caption.

them within parentheses. Do not label axes only with units. In the example, write “Magnetization (A/m)” or “Magnetization {A[m(1)]}”, not just “A/m”. Do not label axes with a ratio of quantities and units. For example, write “Temperature (K)”, not “Temperature/K”.

ACKNOWLEDGMENT

The preferred spelling of the word “acknowledgment” in America is without an “e” after the “g”. Avoid the stilted expression “one of us (R. B. G.) thanks ...”. Instead, try “R. B. G. thanks...”. Put sponsor acknowledgments in the unnumbered footnote on the first page.

REFERENCES

- [1] A. I. Perez-Neira, M. A. Vazquez, M. B. Shankar, S. Maleki, and S. Chatzinotas, “Signal processing for high-throughput satellites: Challenges in new interference-limited scenarios,” *IEEE Signal Processing Magazine*, vol. 36, no. 4, pp. 112–131, 2019.

Contents

Acknowledgements	i
Abstract	ii
Extended Abstract	iii
Contents	vi
List of Figures	ix
Symbols and Notations	x
Abbreviations	x
Mathematical Notations	xi
System Parameters	xi
Symbols	xi
1 Introduction	1
1.1 Motivation	1
1.2 Thesis Outline	1
1.3 Simulation Framework	1
1.4 Societal Reflection	1
1.5 Use of GenAI	1
I Background Material	2
2 Communication Systems	3
2.1 Digital Communication Systems	3
2.2 MIMO Communication Systems	4
2.2.1 SU-MIMO System Model	4
2.2.2 MU-MIMO System Model	6
2.3 Information Theory Concepts	7
2.3.1 Mutual Information	8
2.3.2 Achievable Rate and Capacity	8
2.3.3 Rate Region and Sum Capacity	9

3	Precoding for SU-MIMO systems	11
3.1	Capacity Achieving Precoding	11
3.1.1	SU-MIMO Capacity	11
3.1.2	Optimal Precoder Design	12
3.2	Joint Design for Linear Precoder and Combiner	15
3.2.1	Generalized WMMSE Design	15
3.2.2	Maximum Information Rate Design	17
3.2.3	Quality of Service Design	18
3.2.4	Unweighted MMSE Design	19
3.3	Performance Evaluation	20
3.3.1	Bit Allocation Strategies	20
3.3.2	Impact of the Data Rate	22
3.3.3	Impact of the Antenna Count	23
3.3.4	Analytical Validation	25
4	Precoding for MU-MIMO systems	26
4.1	Zero-Forcing Precoding	27
4.2	Zero-Forcing Precoding with Heuristic LSV Combiner	30
4.3	Block Diagonalization Precoding	31
4.4	Weighted Minimum Mean Square Error	34
4.5	Performance Comparison	34
II	Precoding for Satellite Communication Systems	35
5	High-Throughput Satellite Communication Systems	30
6	Precoding for Satellite Links	31
III	Appendices	32
A	Waterfilling for Power Allocation	33
A.1	Optimal Power Allocation	33
A.2	Waterfilling Algorithm	35
A.3	Examples	36
B	Analytical BER of an AWGN Channel	38
B.1	Union Upper Bound	39
B.2	Nearest Neighbour Approximation	40
C	Rayleigh Fading Channel Model	42
C.1	Doppler Shift	42
C.2	CS Complex Gaussian Channel Gain	43
C.3	Doppler Spectrum	45

D Computer Simulation of Time–Correlated Processes	50
D.1 Cholesky Decomposition Method	50
D.2 Linear Filtering Method	52
E Calculations	55

List of Figures

2.1	Block diagram of a general digital communication system.	3
2.2	Block diagram of a SU-MIMO system.	5
2.3	Block diagram of a MU-MIMO system.	6
2.4	Rate region of a MU-MIMO channel	9
3.1	Decomposition of SU-MIMO channel	14
3.2	Waterfilling power allocation	14
3.3	Waterfilling power allocation at SNR extremes	15
3.4	System performance with fixed bit allocation	21
3.5	Adaptive bit allocation in different SNR regimes	21
3.6	System performance with adaptive bit allocation	22
3.7	Impact of the IBR on the system performance (adaptive bit allocation)	22
3.8	Impact of the IBR on the system performance (fixed bit allocation)	23
3.9	Impact of the antenna count on the system performance (constant BER comparison)	24
3.10	Impact of the antenna count on the system performance (constant IBR comparison)	24
3.11	Analytical validation of the system performance	25
4.1	Visualization of zero-forcing (ZF) precoding (2-antenna base station (BS) and 2 single-antenna user terminals (UTs))	29
4.2	Visualization of ZF precoding (3-antenna BS and 2 single-antenna UTs)	30
4.3	Comparison between BD precoding for MU and SVD precoding for SU scenarios	33
A.1	Waterfilling algorithm interpretation	35
B.1	Block diagram of an AWGN channel	38
C.1	Doppler shift	43
C.2	Autocorrelation function of Jakes' model	47
C.3	Doppler spectrum	49

Symbols and Notations

Abbreviations

acf	autocorrelation function
AWGN	additive white Gaussian noise
BS	base station
BD	block diagonalization
BER	bit error rate
CS	circularly symmetric
CSI	channel state information
DFT	discrete Fourier transform
DPC	dirty paper coding
EVD	eigenvalue decomposition
FFT	fast Fourier transform
FIR	finite impulse response
IBR	information bit rate
i.i.d.	independent and identically distributed
KKT	Karush-Kuhn-Tucker
LSV	left singular vector
MI	mutual information
MIMO	multiple-input multiple-output
MMSE	minimum mean squared error
MSE	mean squared error
MU	multi-user
pdf	probability density function

PAM	pulse amplitude modulation
PSD	power spectral density
PSK	phase shift keying
QAM	quadrature amplitude modulation
QoS	Quality-of-Service
RX	receiver
SISO	single-input single-output
SNR	signal-to-noise ratio
SR	sum rate
SU	single-user
SVD	singular value decomposition
THP	Tomlinson–Harashima precoding
TX	transmitter
UT	user terminal
WMSE	weighted mean squared error
WMMSE	weighted minimum mean squared error
WSR	weighted sum rate
ZF	zero-forcing

Mathematical Notations

TO DO

System Parameters

N_T	Number of transmit antennas at the BS
N_R	Number of receive antennas at each UT
N_S	Number of data streams per UT
K	Number of UTs

Symbols

TO DO

Part I

Background Material

Chapter 4

Precoding for MU-MIMO systems

Consider the downlink multi-user (MU)-MIMO system introduced in Section 2.2.2. The key difference from the single-user (SU)-MIMO system of the previous chapter is the presence of inter-user interference: the signal intended for one user leaks into the receive antennas of the other users.

The preceding chapter restricted attention to linear precoding, in which the transmitted signal is obtained by applying a linear transformation, represented by a matrix, to the data symbol vector. Nonlinear precoding techniques, on the other hand, apply nonlinear processing to the data symbols before transmission. While linear precoding can achieve the capacity of the SU-MIMO channel, it is no longer capacity-achieving in the MU-MIMO setting.

Two well-known nonlinear precoding techniques are dirty paper coding (DPC) [16] and Tomlinson–Harashima precoding (THP) [17, 18]. DPC is an information-theoretic technique that achieves the capacity region of the Gaussian broadcast channel by encoding each data stream such that interference from all previously encoded streams is pre-subtracted at the transmitter. THP approximates DPC at reduced complexity by successively canceling inter-user interference at the transmitter using modulo arithmetic. Despite their superior capacity, nonlinear techniques incur a significantly higher computational cost. Linear precoding, by contrast, offers near-optimal performance at a fraction of the complexity, and therefore remains the preferred approach in practice. This chapter accordingly focuses on linear precoding techniques.

The following sections presents four commonly used linear precoding strategies for the MU-MIMO downlink, arranged in order of increasing complexity. The presentation begins with three precoding techniques related to ZF, and concludes with the state-of-the-art WMMSE precoder. At the end of this chapter, their performance is compared through numerical simulations for different system configurations. In line with the previous chapter, the design is focused on maximizing the total sum rate (SR) of the system.

4.1 Zero-Forcing Precoding

The objective of zero-forcing (ZF) precoding is to cancel all interference, both inter-user and inter-stream. Moreover, no receiver-side combining is applied. Instead, all processing is done by the precoder and each UT forwards its received samples directly for detection.

Considering these restrictions, we obtain that

$$\mathbf{T} = (\mathbf{G}\mathbf{H}\mathbf{F}) = \sqrt{\mathbf{Q}} \quad \text{and} \quad \mathbf{G} = \mathbf{I}_{\text{rect}}, \quad (4.1)$$

where $\mathbf{T}$ is the compound MU-MIMO transfer matrix, $\sqrt{\mathbf{Q}} \in \mathbb{R}_{>0}^{K N_S \times K N_S}$ is a diagonal scaling matrix and $\mathbf{I}_{\text{rect}}$ is a rectangular diagonal matrix with unit entries on its main diagonal. The compound MU-MIMO input-output relation (2.10) then simplifies to

$$z_{k,i} = q_{k,i} a_{k,i} + n_{k,i} \quad \text{for } k = 1, \dots, K \quad \text{and} \quad i = 1, \dots, N_S. \quad (4.2)$$

This shows that the interference has been completely eliminated and each data stream is received over an independent scalar additive white Gaussian noise (AWGN) channel, which allows performing symbol-by-symbol detection at each UT.

It is shown in [19] that the constraints in (4.1) are satisfied when the precoder is chosen as the right pseudo-inverse of the channel matrix, scaled by $\sqrt{\mathbf{Q}}$:

$$\mathbf{F} = \mathbf{H}^H (\mathbf{H}\mathbf{H}^H)^{-1} \sqrt{\mathbf{Q}} \quad (4.3)$$

This expression requires the channel matrix to have full row rank ($R_H = K N_S$), so that the inverse $(\mathbf{H}\mathbf{H}^H)^{-1}$ exists. For an independent and identically distributed (i.i.d.) Rayleigh fading channel, this condition holds almost surely provided that $N_T \geq K N_S$. In what follows, this condition is assumed to be satisfied. If it is not, the inverse $(\mathbf{H}\mathbf{H}^H)^{-1}$ is replaced by the Moore-Penrose pseudo-inverse, which is computed from the singular value decomposition (SVD) of the channel matrix [20].

It remains to determine the optimal diagonal entries of the scaling matrix $\mathbf{Q}$ so as to maximize the weighted sum rate (WSR) under the total transmit power constraint. Considering (4.2), the WSR of the system can be written as

$$\text{WSR} = \sum_{k=1}^K \sum_{i=1}^{N_S} \mu_{k,i} \log_2 \left(1 + \frac{q_{k,i}}{N_0} \right), \quad (4.4)$$

where $\mu_{k,i}$ is the weight assigned to the i th data stream intended for UT k . Substituting the ZF precoder into the transmit power constraint (2.8) yields

$$\sum_{k=1}^K \sum_{i=1}^{N_S} q_{k,i} ((\mathbf{H}^H \mathbf{H})^{-1})_{n,n} \leq P_t \quad \text{with} \quad n = (k-1)N_S + i. \quad (4.5)$$

Let us introduce the substitution

$$p_n = \gamma_n^{-1} q_{k,i} \quad \text{with} \quad \gamma_n^{-1} = ((\mathbf{H}^H \mathbf{H})^{-1})_{n,n}, \quad (4.6)$$

such that we can write the WSR maximization problem as follows:

$$\begin{aligned} \max_{\{p_n\}} \quad & \sum_{n=1}^{K N_S} \alpha_n \log_2 \left(1 + \frac{\gamma_n}{N_0} p_n \right) \\ \text{s.t.} \quad & \sum_{n=1}^{K N_S} p_n \leq P_t \end{aligned} \quad (4.7)$$

This is exactly the optimization problem handled in Appendix A. The optimal values for p_i are therefore obtained using the waterfilling solution as described in Algorithm 1.

Note that the above power allocation strategy may allocate almost no power to the data streams of a UT with poor channel conditions. The achievable rate for that specific user will therefore be very small, compared the other users with better channel conditions. An alternative, more fair approach is to divide the total transmit power equally across the different users, and use the waterfilling solution to allocate the power to which every user is entitled across the different data streams intended for that user.

To summarize, the steps required for computing the ZF compound precoder matrix for total SR maximization across all UTs are described in Algorithm 1.

Algorithm 1 ZF Precoding

Require:

- The compound channel matrix $\mathbf{H}$;
- The total transmit power P_t and the received noise power N_0 .

Ensure: The compound precoder matrix $\mathbf{F}$.

- 1: Compute p_i for $i = 1, \dots, K N_S$ using the waterfilling algorithm (Alg. 1) with inputs $P_t = P_t$, $\alpha_n = 1$, and $\gamma_n = (N_0 ((\mathbf{H}^H \mathbf{H})^{-1})_{n,n})^{-1}$.
- 2: Compute the entries of the scaling matrix as $q_{k,i} = p_n ((\mathbf{H}^H \mathbf{H})^{-1})_{n,n}$ with $n = (k-1) N_S + i$, for $k = 1, \dots, K$ and $i = 1, \dots, N_S$.
- 3: Compute the compound precoder matrix as $\mathbf{F} = \mathbf{H}^H (\mathbf{H} \mathbf{H}^H)^{-1} \sqrt{\mathbf{Q}}$

Return $\mathbf{F}$

To build an intuitive understanding of ZF precoding, consider a downlink MU-MIMO system with two single-antenna UTs and a BS with two transmit antennas. In this case, the channel matrix is formed by two row vectors, each describing the channel direction toward one user, while the precoder consists of two column vectors, each defining the transmit direction of the data stream intended for a specific UT. The ZF design chooses each precoding vector to be orthogonal to the channel vector of the non-intended user. This ensures that the signal intended for one UT does not leak into the receive antenna of the other UT, thereby eliminating inter-user interference.

This geometry is illustrated in Figure 4.1, where Figure 4.1a corresponds to favorable channel conditions and Figure 4.1b to unfavorable channel conditions.

In the favorable case, the channel directions for the two UTs are nearly orthogonal. As a result, the ZF precoding vectors can remain close to the intended channel directions, which preserves a high effective channel gain. In the unfavorable case, the channel directions are strongly correlated (nearly parallel), so the ZF constraints force the precoding vectors away from the desired channel directions. This substantially reduces the effective gain.

For a fair geometric comparison, the channel vectors in both figures are normalized, and the precoding vectors are scaled such that each stream attains unit effective channel gain. Under this normalization, the much larger precoder norms in the unfavorable case indicate a significantly higher transmit-power requirement to achieve the same effective gain. With a fixed total transmit power in practice, this translates directly into lower received signal-to-noise ratio (SNR) and therefore a lower achievable SR.

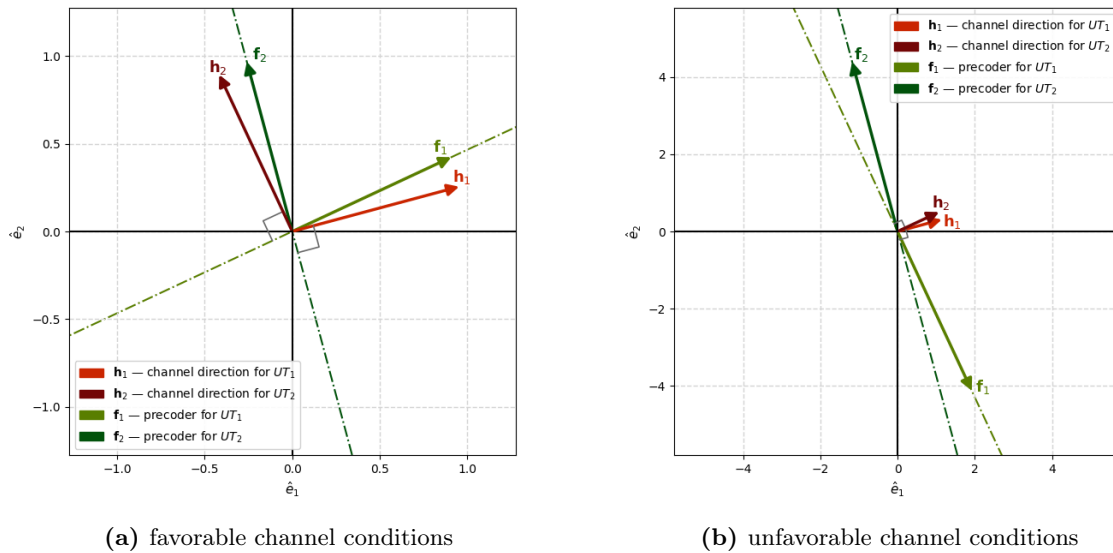


Figure 4.1: Visualization of ZF precoder for a MU-MIMO system with 2 single-antenna UTs and a 2-antenna BS under (a) favorable and (b) unfavorable channel conditions. For both scenarios, the channel vectors are normalized and the precoding vectors are scaled such that the effective channel gain for each data stream is equal to 1. Note the much larger norm of the precoding vectors in the unfavorable scenario compared to the favorable scenario, which illustrates that a lot more power is required to achieve the same effective channel gain when the channel vectors of the UTs are strongly correlated.

Figure 4.2 illustrates what happens when the BS is equipped with an additional transmit antenna while the number of single-antenna UTs remains equal to two. The channel matrix is still formed by two row vectors, one for each user, and the precoder by two column vectors. However, these vectors now lie in a three-dimensional space. As a result, the null-space orthogonal to each user's channel direction is no longer a line but a two-dimensional plane.

In order to eliminate all interference, the precoding vector for each user can be chosen anywhere in the null-space of the other users' channel vectors, that is, in the plane orthogonal to the channel directions of the other users. The best choice is to select the precoding vectors as close as possible to the intended channel directions, which corresponds to projecting the channel vectors onto the

respective orthogonal planes. This maximizes the effective channel gain for each data stream, since it allows as much power as possible to be transmitted in the direction of the intended UT.

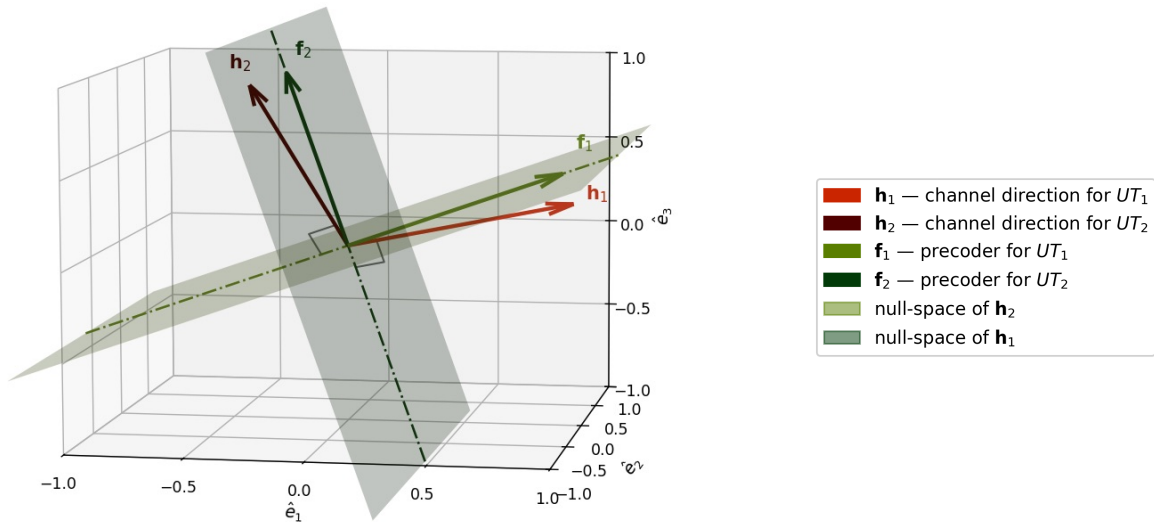


Figure 4.2: Visualization of ZF precoder for a MU-MIMO system with 2 single-antenna UTs and a 3-antenna BS. The channel vectors are normalized and the precoding vectors are scaled such that the effective channel gain for each data stream is equal to 1. With three transmit antennas, the null-space orthogonal to each user's channel direction is two-dimensional. The ZF precoding vector is chosen as the projection of the intended user's channel direction onto this plane, which minimizes the deviation from the desired channel direction while preserving the zero-forcing constraint.

4.2 Zero-Forcing Precoding with Heuristic LSV Combiner

Pure ZF precoding is clearly suboptimal because it does not exploit receiver-side combining at the UTs. A practical extension is therefore to equip each UT with a heuristic left singular vector (LSV) combiner, while keeping the BS precoder design based on ZF. The key idea is to improve the effective channel gains seen without increasing the signaling overhead. Unlike coordinated designs, where the BS jointly computes the compound precoder and the combiners and then broadcasts the combiners to the UTs, this approach is non-coordinated: each UT computes its own combiner locally.

The procedure is as follows. First, the BS transmits pilot symbols, from which each UT estimates its downlink channel matrix $\mathbf{H}_k$. Next, each UT constructs its heuristic combiner matrix $\mathbf{G}_k$ from the N_S dominant left singular vectors of $\mathbf{H}_k$, analogous to combiner for capacity-achieving precoding in the SU-MIMO scenario. Each UT then forms its virtual channel ($\mathbf{G}_k \mathbf{H}_k$) and feeds this matrix back to the BS. Finally, the BS stacks these virtual channels and applies the standard ZF precoding procedure from the previous section on the virtual channel.

This method was proposed by Sander Cornelis in [8] and is particularly attractive in feedforward-limited scenarios. The complete procedure is summarized in Algorithm 2.

Algorithm 2 ZF Precoding with Heuristic LSV combiner**Require:**

- The compound channel matrix $\mathbf{H}$;
- The total transmit power P_t and the received noise power N_0 .

Ensure: The compound precoder matrix $\mathbf{F}$ and the combiner matrices $\mathbf{G}_k$ for each UT.

- 1: Compute the combiner matrices $\mathbf{G}_k$ for each UT as

$$\mathbf{G}_k = [\mathbf{u}_{k,1} \ \dots \ \mathbf{u}_{k,N_S}]^H, \quad \text{with} \quad \mathbf{H}_k = \mathbf{U}_k \mathbf{\Sigma}_k \mathbf{V}_k^H$$

- 2: Compute the compound precoder matrix $\mathbf{F}$ as using the ZF algorithm (Alg. 1) with inputs $\mathbf{H} = (\mathbf{G}\mathbf{H})$, $P_t = P_t$, $N_0 = N_0$.

Return $\mathbf{F}$, $\mathbf{G}_k$ for $k = 1, \dots, K$

4.3 Block Diagonalization Precoding

The last precoding technique in the class of ZF precoders is a coordinated technique called block diagonalization (BD) precoding [21]. In contrast to pure ZF, which cancels both inter-user and inter-stream interference, BD only suppresses the inter-user interference. As a result, the compound transfer matrix is no longer required to be diagonal, but only block-diagonal, so that each UT receives a signal vector free of contributions of data streams intended for other UTs. The downlink MU-MIMO channel is thereby decomposed into K parallel SU-MIMO channels. Once this first step is completed, the SU-MIMO precoding and combining techniques developed in Chapter 3 can be applied independently to each subsystem.

The zero inter-user interference condition requires that the precoder $\mathbf{F}_k$ intended for UT k lie in the null space of the channel matrices of all other users. This leads to the constraints

$$\forall k' \neq k : \quad \mathbf{H}_{k'} \mathbf{F}_k = \mathbf{0}, \quad \text{for } k = 1, \dots, K. \quad (4.8)$$

To characterize these constraints more explicitly, define the interfering channel matrix $\mathring{\mathbf{H}}_k$ of UT k as the vertically stacked channel matrices of all other users:

$$\mathring{\mathbf{H}}_k = [\mathbf{H}_1^H \ \dots \ \mathbf{H}_{k-1}^H \ \mathbf{H}_{k+1}^H \ \dots \ \mathbf{H}_K^H]^H \in \mathbb{C}^{(K-1)N_R \times N_T}. \quad (4.9)$$

The constraint in (4.8) is then equivalent to forcing the transmit directions for UT k to lie within the null-space of its interfering channel matrix.

To obtain a basis for this null space, consider the SVD of the interfering channel matrix:

$$\mathring{\mathbf{H}}_k = \mathring{\mathbf{U}}_k \mathring{\mathbf{\Sigma}}_k \begin{bmatrix} \mathring{\mathbf{V}}_k^{(1)} & \mathring{\mathbf{V}}_k^{(0)} \end{bmatrix}^H. \quad (4.10)$$

The first $R_{\mathring{H}_k}$ right singular vectors of $\mathring{\mathbf{H}}_k$, collected in $\mathring{\mathbf{V}}_k^{(1)}$, span the row space of $\mathring{\mathbf{H}}_k$, whereas the remaining $(N_T - R_{\mathring{H}_k})$ right singular vectors, collected in $\mathring{\mathbf{V}}_k^{(0)}$, span its null space. By $R_{\mathring{H}_k}$ we denote the rank of the interfering channel matrix $\mathring{\mathbf{H}}_k$. Therefore, any precoder of the form

$$\mathbf{F}_k^{\text{MU}} = \mathring{\mathbf{V}}_k^{(0)} \quad (4.11)$$

automatically satisfies the zero inter-user interference condition.

Data transmission to UT k is only possible if the null space of $\mathring{\mathbf{H}}_k$ is non-empty, i.e. it has a dimension greater than zero. This condition is satisfied if $R_{\mathring{H}_k} < N_T$, which is guaranteed under the standing assumption that the number of transmit antennas is greater than or equal to the total number of receive antennas across all users, i.e. $N_T \geq KN_R$. In addition, the channel as seen after the projection of $\mathbf{F}_k^{\text{MU}}$, i.e. $(\mathbf{H}_k \mathring{\mathbf{V}}_k^{(0)})$, must still retain useful spatial dimensions. In other words, the channel directions of UT k should not be entirely contained in the row space of the interfering UTs. A sufficient condition is that at least one row of $\mathbf{H}_k$ is linearly independent of the rows of $\mathring{\mathbf{H}}_k$ [22]. This shows that BD, like ZF, benefits from users with sufficiently distinct spatial signatures, i.e. UTs without highly correlated channel directions. Note that pure ZF imposes the stronger requirement that all rows of $\mathbf{H}_k$ are linearly independent of $\mathring{\mathbf{H}}_k$. While this is not necessary for BD, it would result in a higher rank of $(\mathbf{H}_k \mathring{\mathbf{V}}_k^{(0)})$, and therefore greater degrees of freedom in the subsequent SU-MIMO design step.

If, in a first step, the receiver combiners are ignored and the multi-user precoder is chosen as $\mathbf{F}_k^{\text{MU}} = \mathring{\mathbf{V}}_k^{(0)}$, then the compound MU-MIMO input-output relation simplifies to

$$\mathbf{y}_k = (\mathbf{H}_k \mathring{\mathbf{V}}_k^{(0)}) \mathbf{a}_k + \mathbf{n}_k, \quad \text{for } k = 1, \dots, K. \quad (4.12)$$

Hence, the original downlink MU-MIMO system is transformed into K parallel SU-MIMO subsystems, each with $(N_T - R_{\mathring{H}_k})$ effective transmit antennas, N_R receive antennas, and an effective channel matrix $\mathbf{H}_k \mathring{\mathbf{V}}_k^{(0)}$. The second step is then to apply a SU-MIMO precoder and combiner design to each of these effective channels. In this dissertation, the focus is on maximum-

Algorithm 3 BD Precoding

Require:

- The compound channel matrix $\mathbf{H}$;
- The total transmit power P_t and the received noise power N_0 .

Ensure: The compound precoder matrix $\mathbf{F}$ and the combiner matrices $\mathbf{G}_k$ for each UT.

- 1: Construct the interfering channel matrix for each UT k as
 $\mathring{\mathbf{H}}_k = [\mathbf{H}_1^H \ \dots \ \mathbf{H}_{k-1}^H \ \mathbf{H}_{k+1}^H \ \dots \ \mathbf{H}_K^H]^H \in \mathbb{C}^{(K-1)N_R \times N_T}$.
- 2: Compute the MU precoder matrix for each UT k as
 $\mathbf{F}_k^{\text{MU}} = \mathring{\mathbf{V}}_k^{(0)}$, with $\mathring{\mathbf{H}}_k = \mathring{\mathbf{U}}_k \mathring{\mathbf{\Sigma}}_k \begin{bmatrix} \mathring{\mathbf{V}}_k^{(1)} & \mathring{\mathbf{V}}_k^{(0)} \end{bmatrix}^H$.
- 3: Compute the SU precoder and combiner matrix for each UT k as
 $\mathbf{F}_k^{\text{SU}} = [\bar{\mathbf{v}}_{k,1} \ \dots \ \bar{\mathbf{v}}_{k,N_S}]$ and $\mathbf{G}_k = [\bar{\mathbf{u}}_{k,1} \ \dots \ \bar{\mathbf{u}}_{k,N_S}]^H$, with $(\mathbf{H}_k \mathring{\mathbf{V}}_k^{(0)}) = \bar{\mathbf{U}}_k \bar{\mathbf{\Sigma}}_k \bar{\mathbf{V}}_k^H$.
- 4: Extract the eigen subchannel gains as
 $\sigma_n = (\bar{\mathbf{\Sigma}}_k)_{i,i}$ with $n = (k-1)N_S + i$, for $k = 1, \dots, K$ and $i = 1, \dots, N_S$.
- 5: Compute the optimal power allocation p_i using the waterfilling algorithm (Alg. 1) with inputs
 $P_t = P_t$, $\alpha_n = 1$, and $\gamma_n = \sigma_n^2/N_0$.
- 6: Form the compound precoder matrix as
 $\mathbf{F} = [\mathbf{F}_1^{\text{MU}} \mathbf{F}_1^{\text{SU}} \ \dots \ \mathbf{F}_K^{\text{MU}} \mathbf{F}_K^{\text{SU}}] \sqrt{\mathbf{P}}$ with $\mathbf{P} = \text{diag}(p_1, \dots, p_{KN_S})$.

Return $\mathbf{F}$, $\mathbf{G}_k$ for $k = 1, \dots, K$

information-rate design. Therefore, we adapt the capacity-achieving precoding technique from Section 3.1.2, so that each effective channel is diagonalized by means of its SVD, followed by a global waterfilling power allocation across all resulting eigen subchannels. The full BD procedure is summarized in Algorithm 3.

As with pure ZF, the chosen power allocation may devote very little power to users whose effective channels are weak. A more balanced alternative is to divide the total transmit power equally across the users and then apply waterfilling separately over the eigen subchannels of each SU-MIMO subsystem. More generally, the second stage of the BD design need not be based on maximum sum-rate. Other SU-MIMO design criteria, such as Quality-of-Service (QoS)-based or minimum mean squared error (MMSE)-based precoding, can equally be applied to the parallel channels obtained after the block-diagonalization step.

To conclude this section, Figure 4.3 compares the achievable-rate performance of BD precoding in a downlink MU-MIMO setting with the capacity-achieving SVD precoding benchmark in a corresponding SU-MIMO setting. The reference system is a 6×2 SU-MIMO link, whereas the multi-user system is an $8 \times \{2, 2\}$ MU-MIMO link with two UTs, each equipped with two receive antennas. The BD algorithm decouples the MU-MIMO system into 2 parallel SU-MIMO subsystems with, on average, each 6 effective transmit antennas and 2 receive antennas. The rates are averaged over 1000 i.i.d. Rayleigh channel realizations.

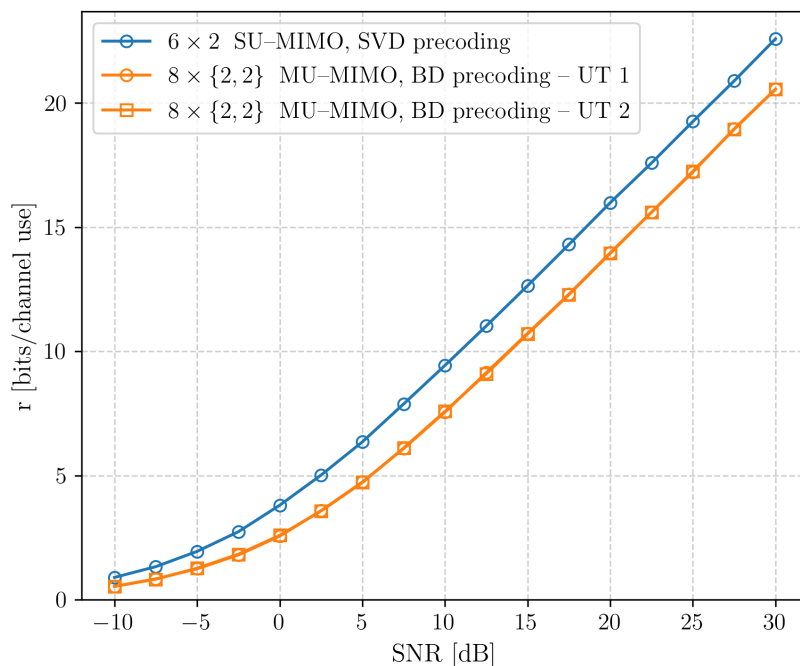


Figure 4.3: Comparison between the achievable rate of a 6×2 SU-MIMO system using SVD precoding and the achievable rates of both UTs in an $8 \times \{2, 2\}$ MU-MIMO system using BD precoding. Results are averaged over 1000 i.i.d. Rayleigh channel realizations. The SNR is defined as the ratio between the total transmit power P_t at the BS and the noise power per receive antenna N_0 .

The curves show that the achievable-rate slope as a function of SNR is essentially the same for all users. In addition, the SU benchmark exhibits only a small SNR advantage over each user in

the multi-user (MU) scenario. The two users in the MU scenario achieve nearly identical rates, which is expected because the MU system is statistically symmetric with respect to the users and the results are averaged over multiple channel realizations.

This comparison indicates that, on average, adding two transmit antennas at the BS and switching from SVD precoding in SU-MIMO to BD precoding in MU-MIMO enables serving an additional two-stream user with only a minor per-user rate penalty. From a system-design perspective, this highlights the practical value of BD: it substantially increases spatial multiplexing capability while preserving nearly the same per-user throughput trend.

4.4 Weighted Minimum Mean Square Error Precoding

4.5 Performance Comparison

Part II

Precoding for Satellite Communication Systems

Part III

Appendices

Bibliography

- [1] G. Foschini and M. Gans, “On limits of wireless communications in a fading environment when using multiple antennas,” *Wireless Personal Communications*, vol. 6, no. 3, pp. 311–335, Mar. 1998.
- [2] S. Alamouti, “A simple transmit diversity technique for wireless communications,” *IEEE Journal on Selected Areas in Communications*, vol. 16, no. 8, pp. 1451–1458, 1998.
- [3] C. E. Shannon, “A mathematical theory of communication,” *The Bell System Technical Journal*, vol. 27, no. 3, pp. 379–423, 1948.
- [4] E. Telatar, “Capacity of multi-antenna gaussian channels,” *European Transactions on Telecommunications*, vol. 10, no. 6, pp. 585–595, 1999.
- [5] S. Vishwanath, N. Jindal, and A. Goldsmith, “On the capacity of multiple input multiple output broadcast channels,” in *2002 IEEE International Conference on Communications. Conference Proceedings. ICC 2002 (Cat. No.02CH37333)*, vol. 3, 2002, pp. 1444–1450 vol.3.
- [6] P. Viswanath and D. Tse, “Sum capacity of the vector gaussian broadcast channel and uplink-downlink duality,” *IEEE Transactions on Information Theory*, vol. 49, no. 8, pp. 1912–1921, 2003.
- [7] W. Yu and J. Cioffi, “Sum capacity of gaussian vector broadcast channels,” *IEEE Transactions on Information Theory*, vol. 50, no. 9, pp. 1875–1892, 2004.
- [8] S. Cornelis, “Optimization of linear hybrid beamformers on riemannian manifolds,” Ph.D. dissertation, Ghent University, 2025.
- [9] G. Strang, “The singular value decomposition (svd) of a matrix,” 2016, MIT 18.095 lecture notes, Lecture 2.
- [10] R. G. Gallager, *Information Theory and Reliable Communication*. John Wiley & Sons, 1968.
- [11] T. M. Cover and J. A. Thomas, *Entropy, Relative Entropy, and Mutual Information*. John Wiley and Sons, Ltd, 2005, ch. 2, pp. 13–55.
- [12] H. Sampath, P. Stoica, and A. Paulraj, “Generalized linear precoder and decoder design for mimo channels using the weighted mmse criterion,” *IEEE Transactions on Communications*, vol. 49, no. 12, pp. 2198–2206, 2001.

- [13] A. Lozano, A. Tulino, and S. Verdu, "Mercury/waterfilling: optimum power allocation with arbitrary input constellations," in *Proceedings. International Symposium on Information Theory, 2005. ISIT 2005.*, 2005, pp. 1773–1777.
- [14] J. Campello, "Practical bit loading for dmt," in *1999 IEEE International Conference on Communications (Cat. No. 99CH36311)*, vol. 2, 1999, pp. 801–805 vol.2.
- [15] J. Shen, "On the singular values of Gaussian random matrices," *Linear Algebra and its Applications*, vol. 326, no. 1-3, pp. 1–14, Mar. 2001. [Online]. Available: <https://linkinghub.elsevier.com/retrieve/pii/S0024379500003220>
- [16] M. Costa, "Writing on dirty paper (corresp.)," *IEEE Transactions on Information Theory*, vol. 29, no. 3, pp. 439–441, 1983.
- [17] H. Harashima and H. Miyakawa, "Matched-transmission technique for channels with inter-symbol interference," *IEEE Transactions on Communications*, vol. 20, no. 4, pp. 774–780, 1972.
- [18] C. Windpassinger, R. Fischer, T. Vencel, and J. Huber, "Precoding in multiantenna and multiuser communications," *IEEE Transactions on Wireless Communications*, vol. 3, no. 4, pp. 1305–1316, 2004.
- [19] A. Wiesel, Y. C. Eldar, and S. Shamai, "Zero-forcing precoding and generalized inverses," *IEEE Transactions on Signal Processing*, vol. 56, no. 9, pp. 4409–4418, 2008.
- [20] J. C. A. Barata and M. S. Hussein, "The moore-penrose pseudoinverse. a tutorial review of the theory," 2011, copyright - © 2011. This work is published under <http://arxiv.org/licenses/nonexclusive-distrib/1.0/> (the "License"). Notwithstanding the ProQuest Terms and Conditions, you may use this content in accordance with the terms of the License; Last updated - 2019-04-13.
- [21] Q. Spencer, A. Swindlehurst, and M. Haardt, "Zero-forcing methods for downlink spatial multiplexing in multiuser mimo channels," *IEEE Transactions on Signal Processing*, vol. 52, no. 2, pp. 461–471, 2004.
- [22] R. A. Horn and C. R. Johnson, *Matrix Analysis*. Cambridge University Press, 1985.
- [23] S. Boyd and L. Vandenberghe, *Convex Optimization*. Cambridge University Press, 2004.
- [24] J. B. Lasserre, "On representations of the feasible set in convex optimization," 2009.
- [25] P. He, L. Zhao, S. Zhou, and Z. Niu, "Water-filling: A geometric approach and its application to solve generalized radio resource allocation problems," *IEEE Transactions on Wireless Communications*, vol. 12, no. 7, pp. 3637–3647, 2013.
- [26] L. L. Cam, "The Central Limit Theorem Around 1935," *Statistical Science*, vol. 1, no. 1, pp. 78 – 91, 1986.