
README

- ## Notices for Development Board Selection

  Select **ESP32S3 Dev Module** as the development board



Click on the Tool in menu bar, and refer to the the configuration highlighted in the red box below for setup.

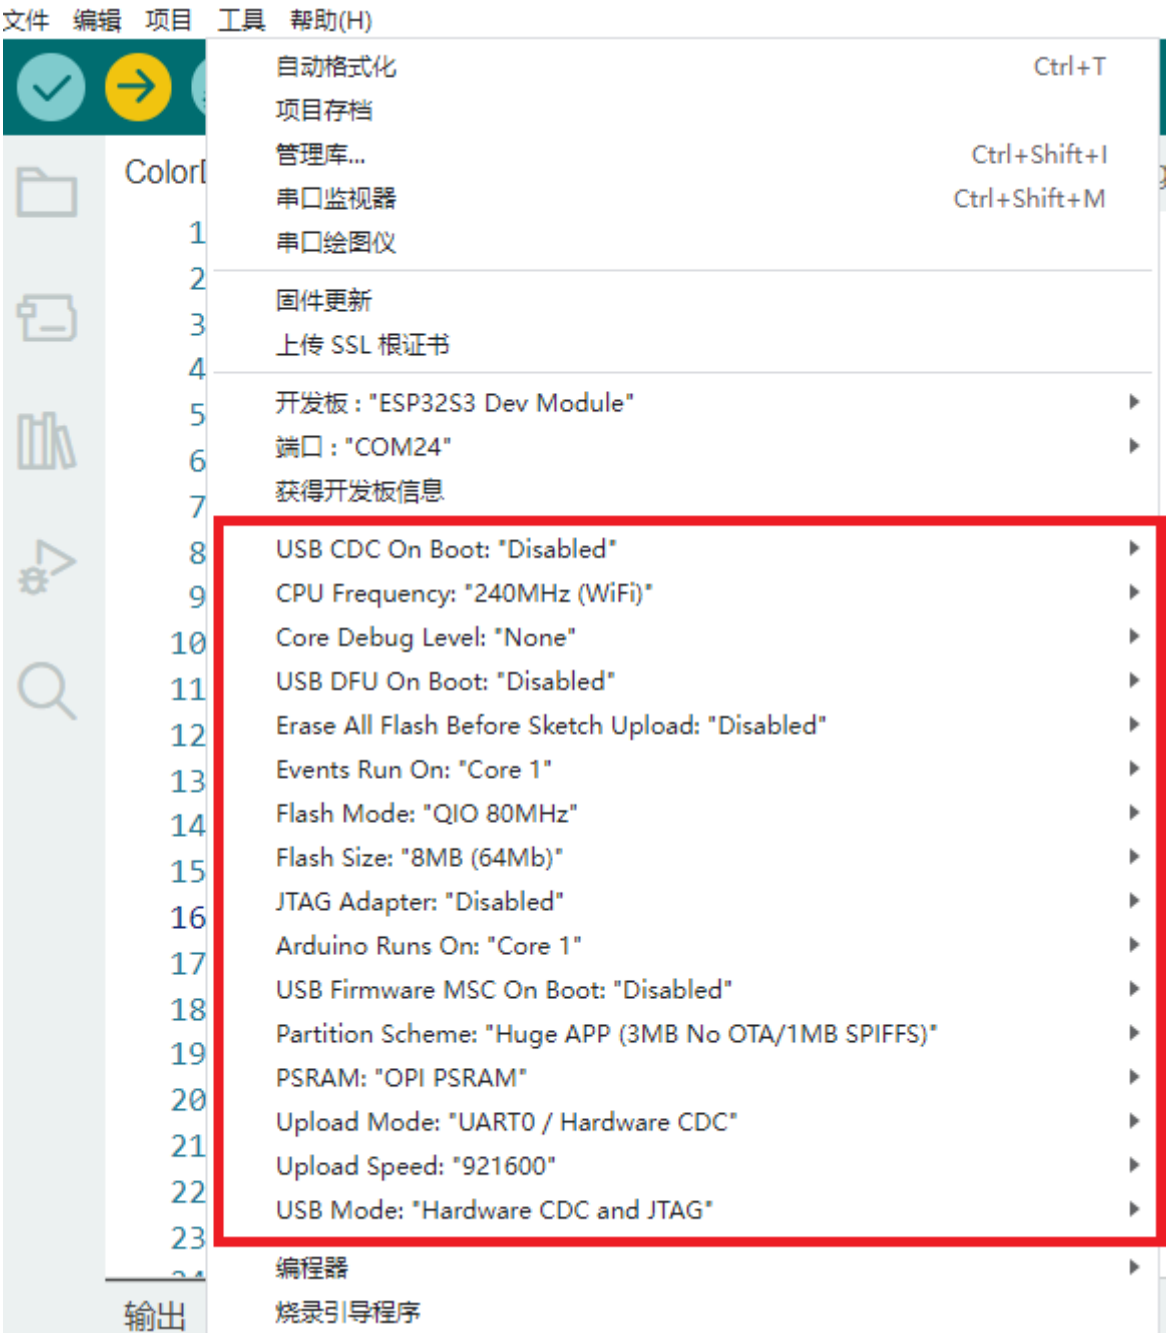

- **Detection IIC Register Instruction (Device address: 0x52)**

Color Detection （Image Resolution：240x240)

Register address	Data format (unsigned char)
0x00	data[0]:X-axis coordinate of the red center data[1]:Y-axis coordinate of the red center data[2]:Width of the red recognition box data[3]:Length of the red recognition box

Register address	Data format (unsigned char)
0x01	data[0]:X-axis coordinate of the green center data[1]:Y-axis coordinate of the green center data[2]:Width of the green recognition box data[3]:Length of the green recognition box
0x02	data[0]:X-axis coordinate of the blue center data[1]:Y-axis coordinate of the blue center data[2]:Width of the blue recognition box data[3]:Length of the blue recognition box
0x03	data[0]:X-axis coordinate of the purple center data[1]:Y-axis coordinate of the purple center data[2]:Width of the purple recognition box data[3]:Length of the purple recognition box
0x04	data[0]:Red ID number data[1]:Green ID number data[2]:Blue ID number data[3]:Purple ID number