




Example 00. Flash Memory Down

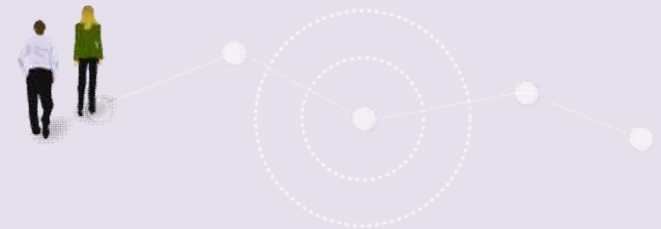

Example 00. *Flash Memory Down*

Example 00. Flash Memory Down

- FPGA(Basys3) 를 *Power Off* → *On* 경우 , 프로그램 유지되게 하기 위한 방법
 - Project Manager → Settings 선택 → Bitstream → bin_file 체크 & Apply : Basys3 보드 뒤에 있는 QSPI Flash Memory에 결과 bin파일이 저장

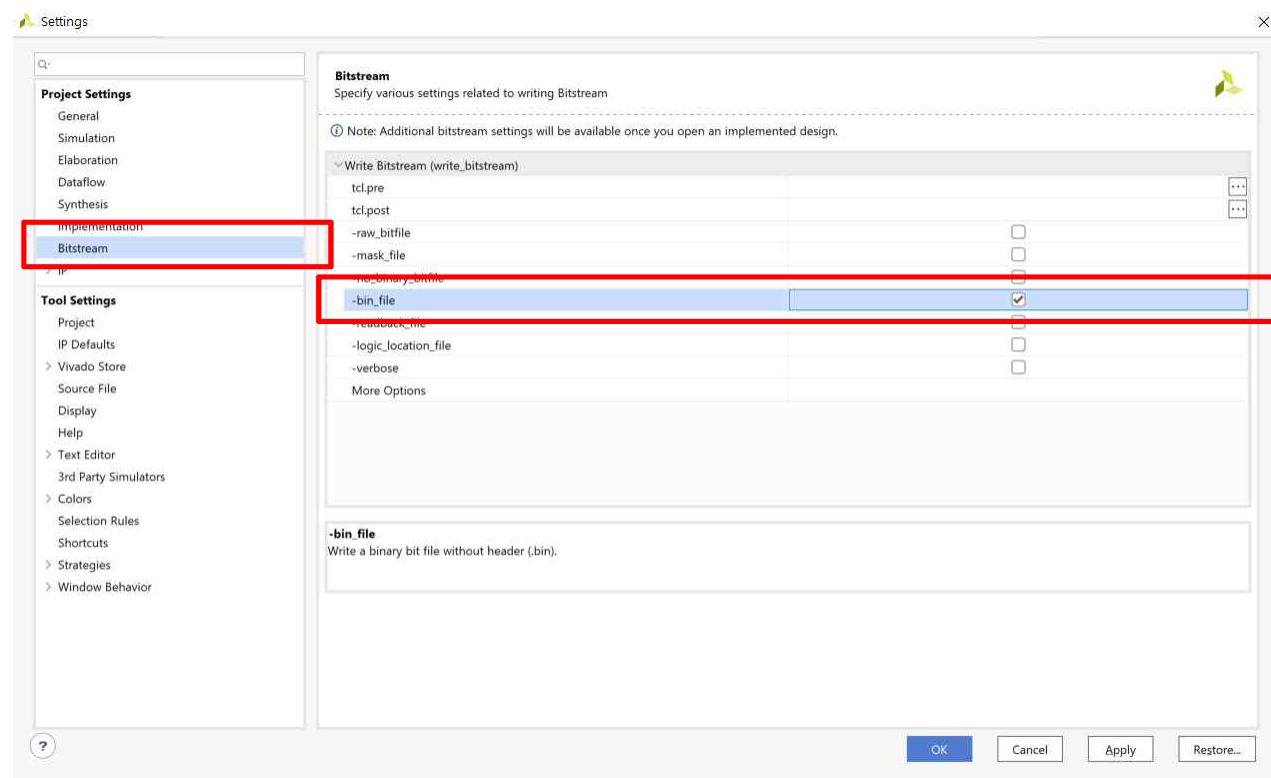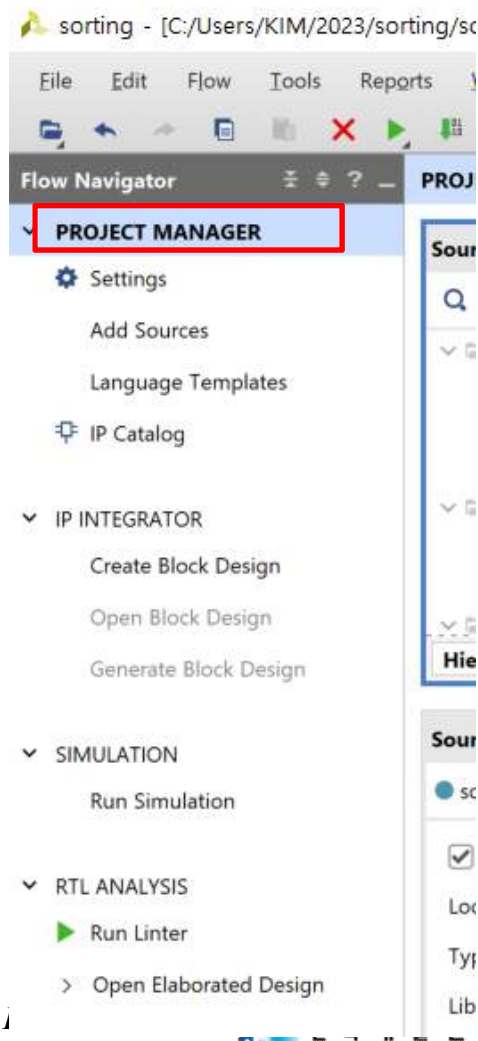

Example 00. Flash Memory Down

- **FPGA(Basys3) 를 Power Off → On 경우 , 프로그램 유지되게 하기 위한 방법**
 - Project Manager → Settings 선택 → Bitstream → bin_file 체크 & Apply : Basys3 보드 뒤에 있는 QSPI Flash Memory에 결과 bin파일이 저장
 - Program and Debug → Open Hardware Manager → Add Configuration Memory Device → FPGA Manual과 보드를 확인 및 보드에 맞는 Memory를 선택

The screenshot illustrates the process of adding configuration memory to an FPGA project. The 'PROGRAM AND DEBUG' tab is selected in the left sidebar, and 'Open Hardware Manager' is highlighted. The 'Add Configuration Memory Device' dialog is open, showing a search for '3233' with one match: 'mx25l3273f-spi-x1_x2_x4'. The 'Hardware' window shows the device is programmed. Red boxes and arrows highlight the key steps and components.

Hardware

Name	Status
localhost (1)	Connected
xilinx_tcf/Digilent/210183B7A295A	Open
xc7a35t_0 (2)	Programmed
XADC (System Monitor)	

Add Configuration Memory Device

Search: 3233 (1 match)

Name	Part	Manufacturer	Alias
mx25l3273f-spi-x1_x2_x4	mx25l3273f	Macronix	mx25l3273f-spi-x1_x2_x4

모델 확인 mx25l3273f-spi-x1_x2_x4

Click Click

OK Cancel

Example 00. Flash Memory Down

➤ FPGA(Basys3) 를 *Power Off* → *On* 경우 , 프로그램 유지되게 하기 위한 방법

- Program and Debug → Open Harsware Manager → Add Configuration Memory Device → FPGA Manual과 보드를 확인 및 보드에 맞는 Memory를 선택

The screenshot shows the Basys3 hardware manager interface. The 'Hardware' tab is active, displaying a list of devices. A red box highlights the 'XADC (System Monitor)' device, with the text '우클릭' (Right-click) next to it. A context menu is open, showing options like 'Configuration Memory Device Properties...', 'Remove Configuration Memory Device...', 'Program Configuration Memory Device...', 'Readback Configuration Memory Device...', and 'Export to Spreadsheet...'. The 'Program Configuration Memory Device...' option is highlighted. Below this, the 'Configuration Memory Device Properties' window is open, showing the 'mx25I3273f-spi-x1_x2_x4' device. The 'Program Operations' section is checked, and the 'Specify File' dialog is open, showing the 'Sorting.bin' file selected. The 'SVF Options' section is also visible.

우클릭

Configuration Memory Device Properties...

Remove Configuration Memory Device...

Program Configuration Memory Device...

Readback Configuration Memory Device...

Export to Spreadsheet...

Configuration Memory Device Properties

mx25I3273f-spi-x1_x2_x4

Program Configuration Memory Device

Select a configuration file and set programming options.

Memory Device: mx25I3273f-spi-x1_x2_x4

Configuration file:

PRM file:

State of non-config mem

Specify File

Look in: impl_1

Recent Directories

File Preview

Size: 271.4 KB

Type: Bitstream file

Owner: DESKTOP-QVKKRPC\KIM

File name: Sorting.bin

Files of type: Configuration Files (.mcs, .bin)

Program Operations

Address Range:

☒ Erase

☐ Blank Check

☒ Program

☒ Verify

☐ Verify Checksum

SVF Options

☐ Create SVF Only (n

SVF File:

OK Cancel Apply