
J1
5V IN/OUT
J2
5V IN/OUT
+5V
GND_STM32
GND_STM32
C4
100uF
GND_STM32

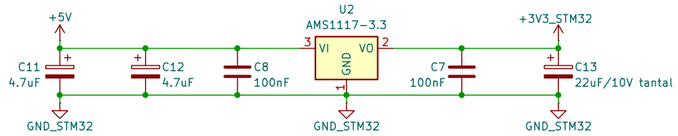
+5V
U2
AMS1117-3.3
+3V3_STM32
C11
4.7uF
C12
4.7uF
C8
100nF
VI
VO
GND
C7
100nF
C13
22uF/10V tantal
GND_STM32
GND_STM32
GND_STM32

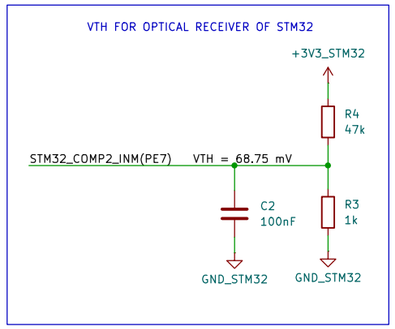
VTH FOR OPTICAL RECEIVER OF STM32
+3V3_STM32
R4
47k
STM32_COMP2_INM(PE7)
VTH = 68.75 mV
C2
100nF
R3
1k
GND_STM32
GND_STM32


PD_SIG_STM32_EXT
J3
OPTICAL RECEIVER SIGNAL to STM32
+3V3_STM32
GND_STM32
STM32_COMP2_INP(PE9)

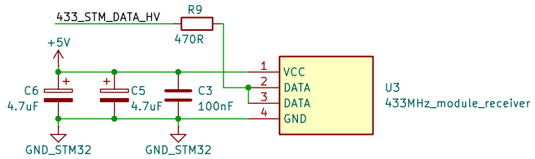
433_STM_DATA_HV
R9
470R
+5V
C6
4.7uF
C5
4.7uF
C3
100nF
VCC
DATA
DATA
GND
U3
433MHz_module_receiver
GND_STM32
GND_STM32

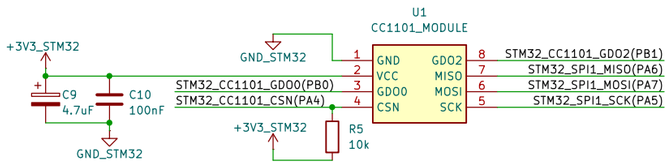
U1
CC1101_MODULE
+3V3_STM32
GND_STM32
C9
4.7uF
C10
100nF
GND_STM32
STM32_CC1101_GDO0(PB0)
STM32_CC1101_CSN(PA4)
+3V3_STM32
R5
10k
GND
VCC
GDO0
CSN
GDO2
MISO
MOSI
SCK
STM32_CC1101_GDO2(PB1)
STM32_SPI1_MISO(PA6)
STM32_SPI1_MOSI(PA7)
STM32_SPI1_SCK(PA5)

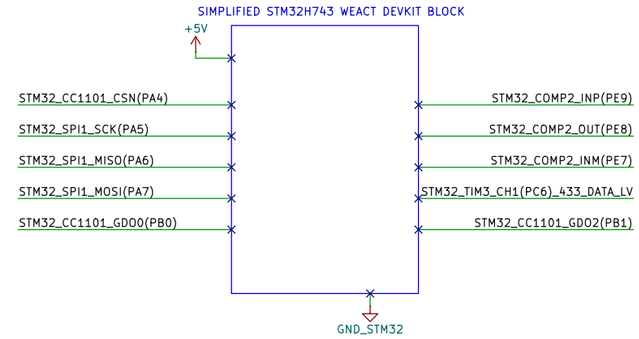
SIMPLIFIED STM32H743 WEACT DEVKIT BLOCK
+5V
STM32_CC1101_CSN(PA4)
STM32_SPI1_SCK(PA5)
STM32_SPI1_MISO(PA6)
STM32_SPI1_MOSI(PA7)
STM32_CC1101_GDO0(PB0)
STM32_COMP2_INP(PE9)
STM32_COMP2_OUT(PE8)
STM32_COMP2_INM(PE7)
STM32_TIM3_CH1(PC6)_433_DATA_LV
STM32_CC1101_GDO2(PB1)
GND_STM32

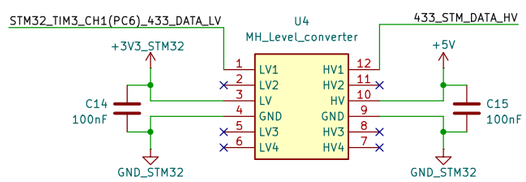
STM32_TIM3_CH1(PC6)_433_DATA_LV
U4
MH_Level_converter
433_STM_DATA_HV
+3V3_STM32
+5V
C14
100nF
C15
100nF
LV1
LV2
LV
GND
LV3
LV4
HV1
HV2
HV
GND
HV3
HV4
GND_STM32
GND_STM32