



GER-M400ST G2 Automotive Relay

Summary

- 1. 1000V Main Relay for e-Mobility
- 2. Max. Continuous Current: 400A
- 3. Electrical Life: 100ops. at 400A, 500VDC

• Contact Data

| | |
|-------------------------------|--|
| Contact Arrangement | SPST-NO |
| Max. Operating Voltage | 1000VDC |
| Max. Continuous Current | 400A |
| Min. Switching Load | 1A 12VDC |
| Contact Voltage Drop(Initial) | 0.02V (at 20A) |
| Electrical Life | 100ops. (at 400A, 500VDC) |
| Mechanical Life | Min. 200,000ops |
| Short Time Current | 400A (Cont., 120mm ²) 500A (100s 120mm ²) 700A (30s 120mm ²) |

• Characteristics

| | |
|--|---|
| Initial Breakdown Voltage Between Open Contacts Between Contacts and Coil | 2,600Vrms/min (Detection Current: 10mA) |
| Initial Insulation Resistance | Min. 100MΩ (at 1000VDC) |
| Operate Time (@ 20°C) | Max. 30ms |
| Release Time (@ 20°C) | Max. 10ms |
| Shock Resistance Functional Destructive | 196m/s ² (20G) (1) 490m/s ² (50G) (2) |
| Vibration Resistance Functional Destructive | 1.0G (3) 4.5G (4) |
| Tightening Torque Mounting Hole Main Terminal | (M5): 3 to 4 N·m [M6]: 3.5 to 4.5N·m, 9.0 to 10.0N·m, 3Time, 100rpm |
| Degree of Protection | IP40 |
| Unit Weight | 500g |

(1) Relay On: 11ms half sine

(2) Relay On: 9ms half sine wave

(3) 10 to 1,000Hz Time of vibration for each X,Y,Z direction: 8 hours

(4) 10 to 200Hz in increments of 10 Time of vibration for each X, Y, Z direction: 4 hours

• Coil Data

| Dual Coil | | | | | |
|---------------|-----------------|------------------|------------------------|-------------------------------|-----------------|
| Rated Voltage | Pick-up Voltage | Drop-out Voltage | Max. Allowable Voltage | Power Consumption | Coil Resistance |
| 12VDC | Max. 9VDC | Min. 1.2VDC | 16VDC | 6W (*inrush current: 2.8A) | 33.7Ω |






• Dimension

GER-M400ST G2


Unit: mm

※ Bidirectional

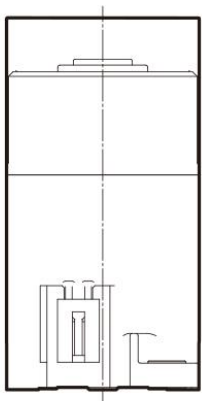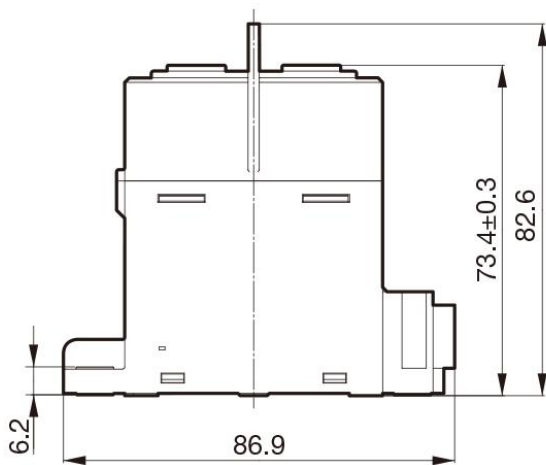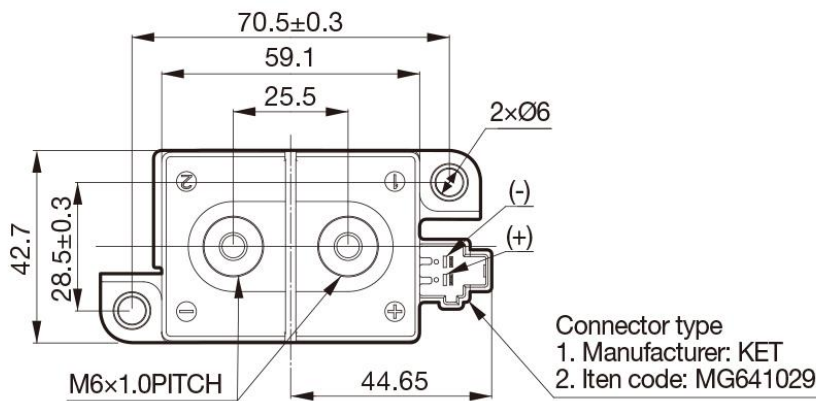

Coil Terminal Accessory

Accessory(Not included)

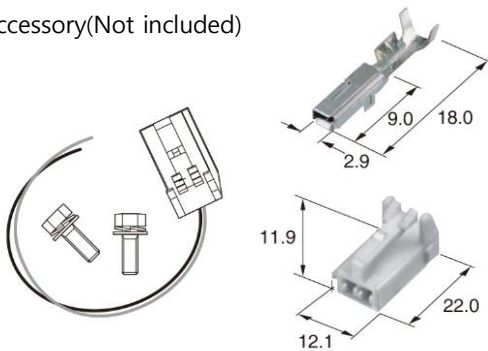

General Tolerance

Less Than 10: ± 0.3 / 10-50: ± 0.5
More Than 50: ± 0.8





• Dimension

GER-M400STSM G2


Unit: mm

※ Bidirectional

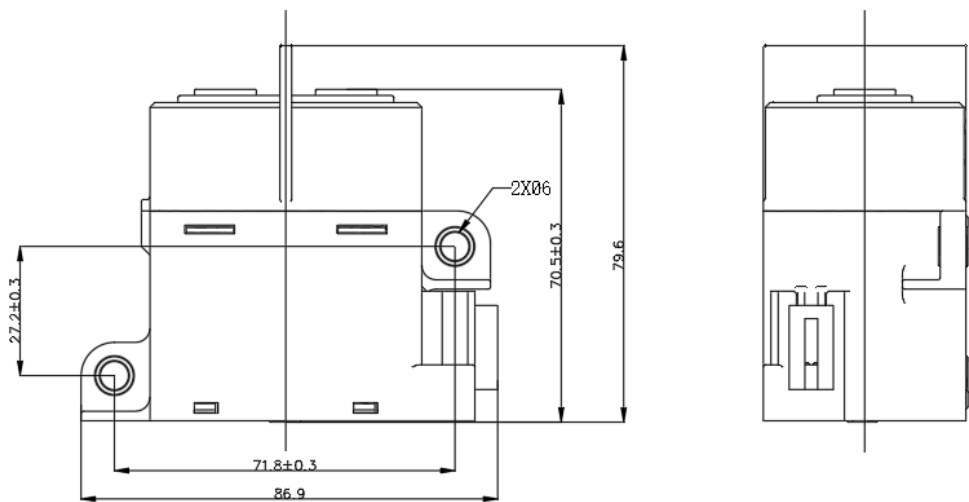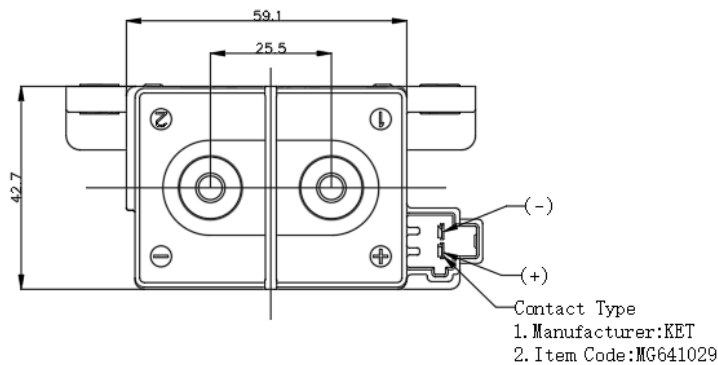

Coil Terminal Accessory

Accessory(Not included)

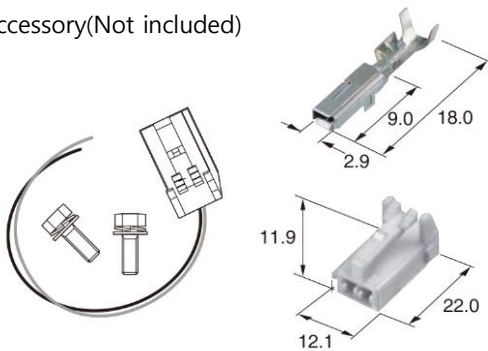


General Tolerance

Less Than 10: ± 0.3 / 10-50: ± 0.5
More Than 50: ± 0.8




• Engineering Data

Operating Voltage Data

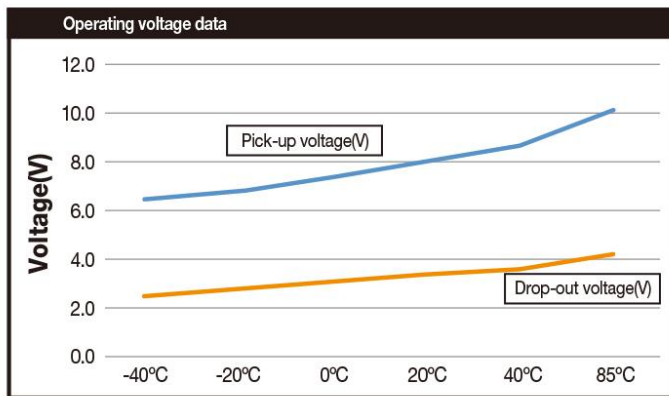

Current Distribution(120mm² @85°C)

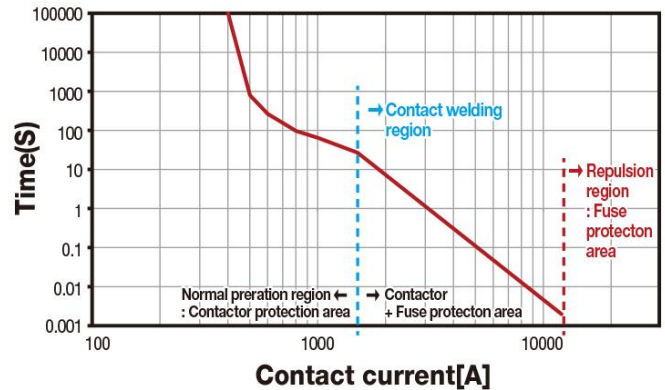

| BUSBAR /CABLE [mm ²] | Current [A] | Duration [s] |
|-------------------------------------|----------------|-----------------|
| 100 | 350 | Cont. |
| | 400 | 1700 |
| | 500 | 460 |
| | 700 | 160 |
| | 1000 | 60 |
| | 1500 | 27 |
| 120 | 400 | Cont. |
| | 500 | 880 |
| | 600 | 290 |
| | 800 | 105 |
| | 1000 | 70 |
| | 1500 | 28 |
| 150 | 400 | Cont. |
| | 500 | 930 |
| | 600 | 460 |
| | 800 | 120 |
| | 1000 | 78 |
| | 1500 | 29 |
| 200 | 600 | 670 |

Expected Life

| | | | | |
|-----------------------|-----------|------------------|---------------|-----------------------------------|
| Electrical Life | (L/R<1ms) | 400A at DC500V | 500 Cycles | (360 Cycle / Hr) |
| | (L/R<1ms) | 250A at DC40V | 70,000 Cycles | (720 Cycle / Hr) – Inrush current |
| | (L/R<1ms) | 100A at DC1000V | 1000 Cycles | (360 Cycle / Hr) |
| | (L/R<1ms) | 650A at DC1000V | 6 Cycles | (360 Cycle / Hr) |
| | (L/R<1ms) | 500A at DC800V | 200 Cycles | (360 Cycle / Hr) |
| | (L/R<1ms) | 900A at DC800V | 10 Cycles | (360 Cycle / Hr) – Only Breaking |
| Max. Cut -off current | (L/R<1ms) | 2000A at DC500V | 1Cycle | (360 Cycle / Hr) |
| | (L/R<1ms) | -2000A at DC500V | 1Cycle | (360 Cycle / Hr) – Reverse |
| | (L/R<1ms) | 1300A at DC800V | 1Cycle | (360 Cycle / Hr) |
| | (L/R<1ms) | -1300A at DC800V | 1Cycle | (360 Cycle / Hr) – Reverse |
| Mechanical | | Min. 200,000ops | | (3600 Cycle / Hr) |



Ordering Information (Reference)

GER – M 400 ST G2

1 2 3 4 5 6 7 8

- ① GER: Green Electrical vehicle Relay
GPR: Green Power Relay

- ② Operating Voltage
Blank ≤450V
M 450-1000V
H 1000-1500V

- ③ Conventional thermal Current
- | | | | |
|-----|------|-----|------|
| 010 | 10A | 200 | 200A |
| 040 | 40A | 250 | 250A |
| 100 | 100A | 400 | 400A |
| 150 | 150A | 500 | 500A |

- ④ Product Type
ST: Standard parts
Customized product
- VV VOLVO
- VW Volkswagen
- BW BMW

- ⑤ Auxiliary Contact
Blank: N/A
-A: N-O
-B: N-C

- ⑥ Control Voltage
Blank: DC12V
DC24V: DC24V

- ⑦ Mounting Type
Blank: Bottom Mounting
SM: Side Mounting
PI: Plug In Type

- ⑧ Main Feature
G2: New Generation 2
SL: SLIM
2CO: 2Coil Control
1CO: 1Coil Control
PWM: PWM Control
CV: Connector Vertical
48V: Rated Voltage 48V
ET: Economic Type
CYET: Cylindrical Effective Type



• Instructions for use

Main Contactor

1. Length of bolts to main contacts of relay should be 6~8mm except bus bar/terminal.
2. Contacts of relay can be oxidized in the air causing some discoloration, but there is no problem to use.
3. Excessive load input to main contacts and over-life may cause heat generation.
4. Avoid oil or foreign substances adhering to main contacts, there may be heat generation to the contacts.
5. Contact resistance may increase due to torque applied to the main contacts or vibration / shock during movement. In this case, please re-measure by applying voltage / current of actual use condition.

Mounting

1. Use the torque range specified in catalog, when tightening screws and nuts to fixed mounting or main contacts.
2. We generally recommend tightening the relays using bolts. When using nuts, the fixed mounting injection part may be pushed and broken. (Use a flat nut when using nuts.)
3. When designing the fixed mounting mounted to relay, please make sure that injection area is not pressed. Fixed mounting of the relay can be broken.

Coil

1. Do not turn off the coil while power is supplied to the main contacts of relay. The relay may be damaged.
2. Excessive load input to coil part may cause heat generation.
3. If voltage is applied slowly to the coil, the relay may not operate. Please operate the coil promptly.
4. When load is applied to main contacts and relay coil turns on/off, coil temperature rises so that coil resistance can rise. In this case, operating voltage may exceed the rated voltage. To avoid this situation, we recommend that you take precautions such as increasing the load current, limiting voltage application time, and applying high coil voltage and nominal voltage.
5. When measuring the withstanding voltage(Initial Breakdown Voltage), measure the relay in OFF state.

Installation

1. Please avoid cross-connection as it may cause malfunction or overheating.
2. If distance between relays is close or if heat generating parts are located close to relay, be careful of temperature rise and insulation (minimum distance between relays is at least 10mm).
3. Use a conductor suitable for the specific current. Failure to meet recommended size(SQ) of conductor may cause heat problems. (It is necessary to consider the condition when installing the module)
4. When wiring, make sure that the power supply is disconnected. Relays can be damaged.



• Instructions for use

Environment

1. Use pick-up/drop-out voltage according to the operating environment. Pick-up/drop-out voltage may vary.
2. Relay life may vary depending on load type used, operating frequency, coil drive circuit and surrounding environment.
3. When using a capacitor, make sure that inrush current should not exceed the rated current of relay(95% or more capacitor charging is recommended)
4. When using inductive load L / R 1ms, measures such as installing surge absorbers in parallel should be taken in order to prevent shortening of electrical life or contact failure.
5. Do not install relays near objects that emit strong magnetic fields or heat.
6. If relays are installed close to each other or near magnetic parts such as motors and speakers, the relays may change operating characteristics or cause malfunctions. Therefore, check the performance under actual operating conditions, after installation.
7. If a product such as current sensor is installed near relay, check the performance under actual operating conditions. There may be a problem to output.
8. When pulling lead wire of the female connector on the opposite side, do not pull it with a force of more than 0.5N. There may be a problem with the product.
9. This product is not waterproof. (IP40)
10. Do not use the product in an environment where organic solvents such as alcohol, benzene, thinner, and strong alkali (ammonia or caustic soda) can easily adhere to the product.
11. Additional components should not be applied to the relay housing.
12. Please note that welding may occur in following environments : inrush current, shutdown, short circuit, low coil voltage, fuse combination
13. Make sure that resonance does not occur at relay mounting area. Vibration values guaranteed may be exceeded due to the resonance.
14. Do not use products that have fallen during use or transportation. It may cause malfunction.
15. If temperature changes suddenly, there may be a problem with current-carrying of the relay.

• **Headquarter : 95, Baekbong-ro, Heungdeok-gu, Cheongju-si, Chungcheongbuk-do, Republic of Korea (28439)**

• Sales team

- US sales htha@lsems.com
- European sales mykim2@lsems.com
- Asian sales syyoon@lsems.com
- China sales kjyim@lsems.com

• Technical team

- US sales yjson@lsems.com
- European sales shyoon2@lsems.com
- Asian sales tahn@lsems.com
- China sales hmrkim@lsems.com