TRIVOLI

HEXAGON

HXL-SERIES

2 YEAR WARRANTY

Model	Power	Voltage	Quantity HEX	Lumens	CCT	Finish	Dimensions
HXL-20065-5WH	200 W	120V	5	17,280lm	6,500 K	White	93-11/16" x 66-1/8" x 1-3/8"
HXL-28065-8WH	280 W	120V	8	25,200lm	6,500 K	White	99-3/16" x 93-11/16" x 1-3/8"
HXL-37065-11WH	370 W	120V	11	33,120lm	6,500 K	White	132-5/16" x 93-11/16" x 1-3/8"
HXL-46065-14WH	460 W	120V	14	41,040lm	6,500 K	White	165-3/8" x 93-11/16" x 1-3/8"
HXL-60065-F14WH	600 W	120V	14	54,000lm	6,500 K	White	189" x 95-11/16" x 1-3/8"

PACKAGE CONTENTS: HXL-20065-5WH HXL-28065-8WH HXL-37065-11WH HXL-46065-14WH

Description	Quantity			
	HXL-20065-5WH	HXL-28065-8WH	HXL-37065-11WH	HXL-46065-14WH
Lamp 440 mm (A)	24	35	46	57
Connector 120° (B)	11	13	15	17
Connector Y (C)	9	15	21	27
Mounting clip (D)	48	70	92	114
Anchor (E)	48	70	92	114
Self-tapping screw (F)	48	70	92	114
Nylon cable tie (G)	10	15	20	30
Power cord (H)	1	1	1	1
Box	1	1	1	1

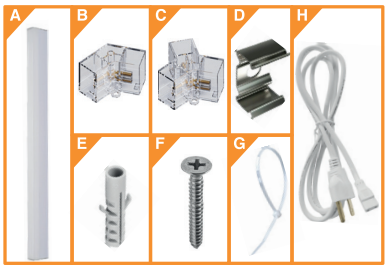

⚠ IMPORTANT NOTE:

Assembly, installation, and disassembly of the product must be carried out with the power off.

SURFACE MOUNT INSTALLATION:

using mounting clips

1. Mark the installation position on the ceiling and fix the mounting clips with self-tapping screws.
2. Assemble the light tubes into a single system using the provided connectors, then attach the assembled fixture to the installed clips.
3. Connect the power cord to the Y- or T-shaped connector.

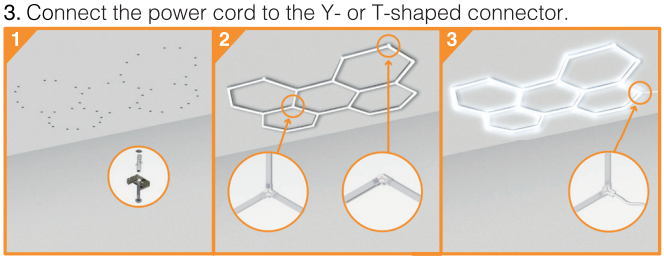

PACKAGE CONTENTS: HXL-60065-F14WH

Description	Quantity	Description	Quantity
Lamp 1175 mm (A)	12	Connector Y (H)	27
Lamp 440 mm (B)	57	Anchor (I)	138
Power cord (C)	1	Self-tapping screw (J)	138
Connector I (D)	8	Nylon cable tie (K)	30
Connector L (E)	3	Mounting clip (L)	138
Connector T (F)	1	Box	1
Connector 120° (G)	17		

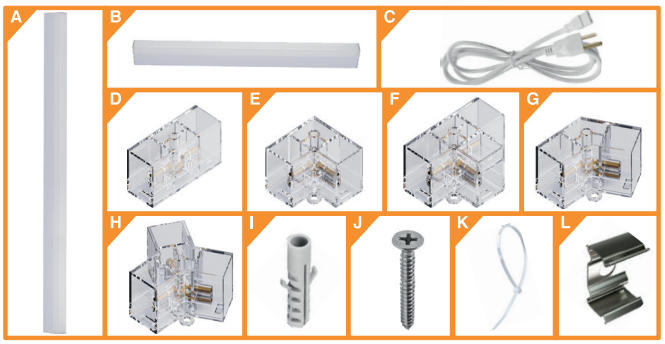

SUSPENDED INSTALLATION:

using nylon cable ties

1. Assemble the light tubes into a single system using the provided connectors.
2. Secure the assembled fixture to the ceiling metal grid using nylon cable ties inserted through the connector mounting holes. Ensure the structure is stable and properly aligned.
3. Connect the power cord to the Y- or T-shaped connector.

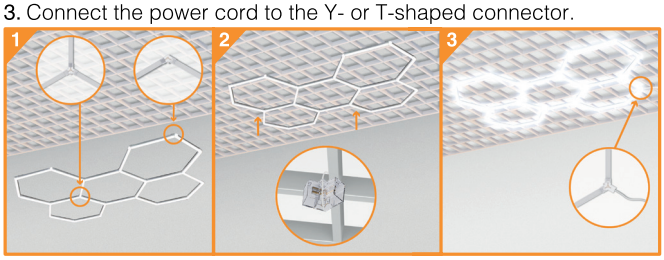

SURFACE MOUNT INSTALLATION:

using connector mounting holes
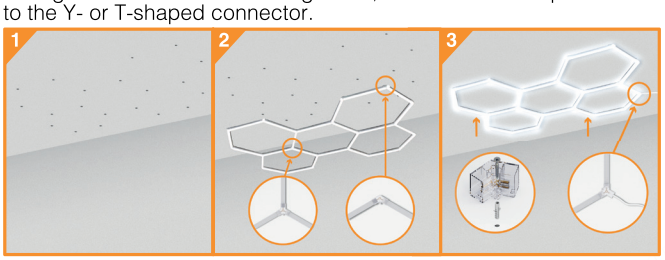
1. Mark the installation position on the ceiling.
2. Assemble the light tubes into a single system using the provided connectors.
3. Fix the assembled system to the ceiling with self-tapping screws through the connector mounting holes, and connect the power cord to the Y- or T-shaped connector.