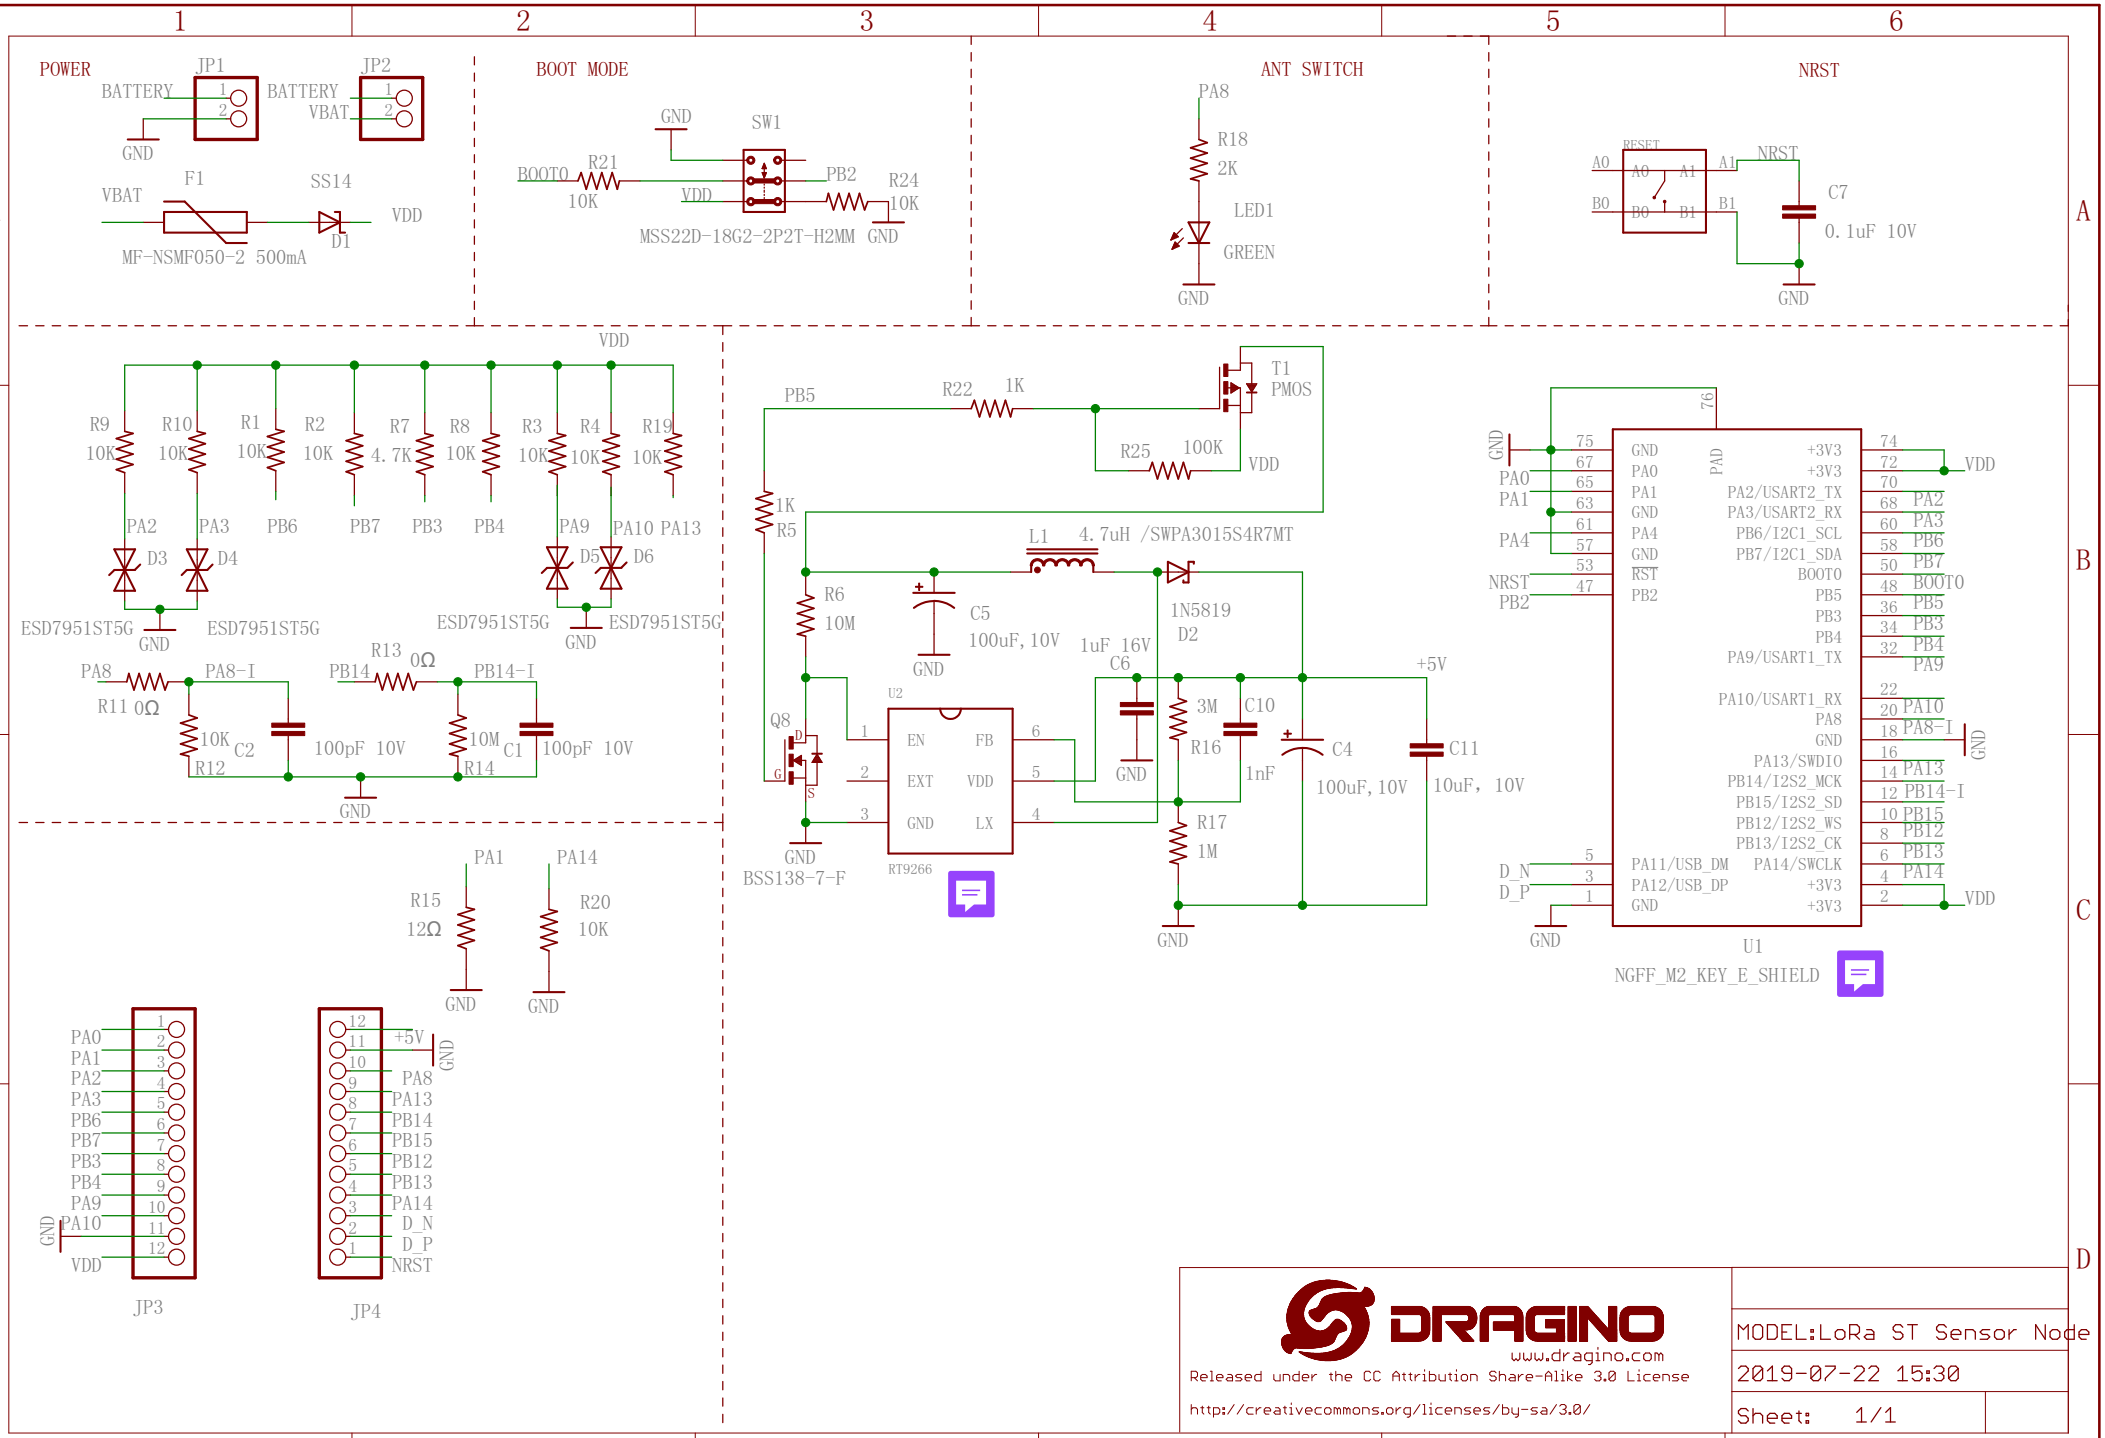

POWER
JP1
BATTERY
GND
JP2
BATTERY
VBAT
F1
SS14
VBAT
VDD
D1
MF-NSMF050-2 500mA
BOOT MODE
GND
SW1
BOOT0
R21
10K
VDD
PB2
R24
10K
MSS22D-18G2-2P2T-H2MM GND
ANT SWITCH
PA8
R18
2K
LED1
GREEN
GND
NRST
RESET
A0
A1
B0
B1
NRST
C7
0.1uF 10V
GND
VDD
R9 R10 R1 R2 R7 R8 R3 R4 R19
10K 10K 10K 10K 4.7K 10K 10K 10K 10K
PA2 PA3 PB6 PB7 PB3 PB4 PA9 PA10 PA13
D3 D4 D5 D6
ESD7951ST5G ESD7951ST5G ESD7951ST5G ESD7951ST5G
GND GND
PA8 PA8-I
R11 0Ω
10K C2
R12
100pF 10V
R13 0Ω
PB14 PB14-I
10M C1
R14
100pF 10V
GND
PB5
R22 1K
T1
PMOS
R25 100K
VDD
1K
R5
L1 4.7uH /SWPA3015S4R7MT
1N5819
D2
R6
10M
C5
100uF, 10V
1uF 16V
C6
GND
U2
Q8
EN
FB
EXT
VDD
GND
LX
RT9266
BSS138-7-F
GND
3M
C10
R16
1nF
C4
100uF, 10V
+5V
C11
10uF, 10V
R17
1M
GND
PA1 PA14
R15
12Ω
R20
10K
GND GND
PA0 PA1 PA2 PA3 PB6 PB7 PB3 PB4 PA9 PA10 VDD
JP3
+5V GND PA8 PA13 PB14 PB15 PB12 PB13 PA14 D_N D_P NRST
JP4
GND PA0 PA1 GND PA4 NRST PB2
PAD
GND PA0 PA1 GND PA4 GND RST PB2
+3V3 +3V3 PA2/USART2_TX PA3/USART2_RX PB6/I2C1_SCL PB7/I2C1_SDA BOOT0 PB5 PB3 PB4 PA9/USART1_TX
PA10/USART1_RX PA8 GND PA13/SWDIO PB14/I2S2_MCK PB15/I2S2_SD PB12/I2S2_WS PB13/I2S2_CK
PA11/USB_DM PA12/USB_DP GND
PA14/SWCLK +3V3 +3V3
D_N D_P
GND
VDD VDD PA2 PA3 PB6 PB7 BOOT0 PB5 PB3 PB4 PA9 PA10 PA8-I PA13 PB14-I PB15 PB12 PB13 PA14
GND
U1
NGFF_M2_KEY_E_SHIELD
DRAGINO
www.dragino.com
Released under the CC Attribution Share-Alike 3.0 License
http://creativecommons.org/licenses/by-sa/3.0/
MODEL:LoRa ST Sensor Node v2.0
2019-07-22 15:30
Sheet: 1/1