

# RGB LED

## Overview



In this lesson, you will learn how to use a RGB (Red Green Blue) LED with an Arduino. You will use the analogWrite function of Arduino to control the color of the LED.

## Specification

RGB led:

Emitting Light Color: Blue, Red, Green

Size(Approx): 5 x 35mm/ 0.2" x 1.37" (D \* L)

Forward Voltage: 3.0-3.4V

Luminous Intensity: 12000-14000mcd







## Pin definition

It is the definition of RGB LED pin :




RGB LED	Arduino
R	->D11
GND	->GND
G	->D10
B	->D9

## Hardware required

Material diagram	Material name	Number
	RGB LED	1
	220Ω/330Ω resistor	3
	USB Cable	1
	UNO R3	1
	Breadboard	1
	Jumper wires	Several

## Connection diagram

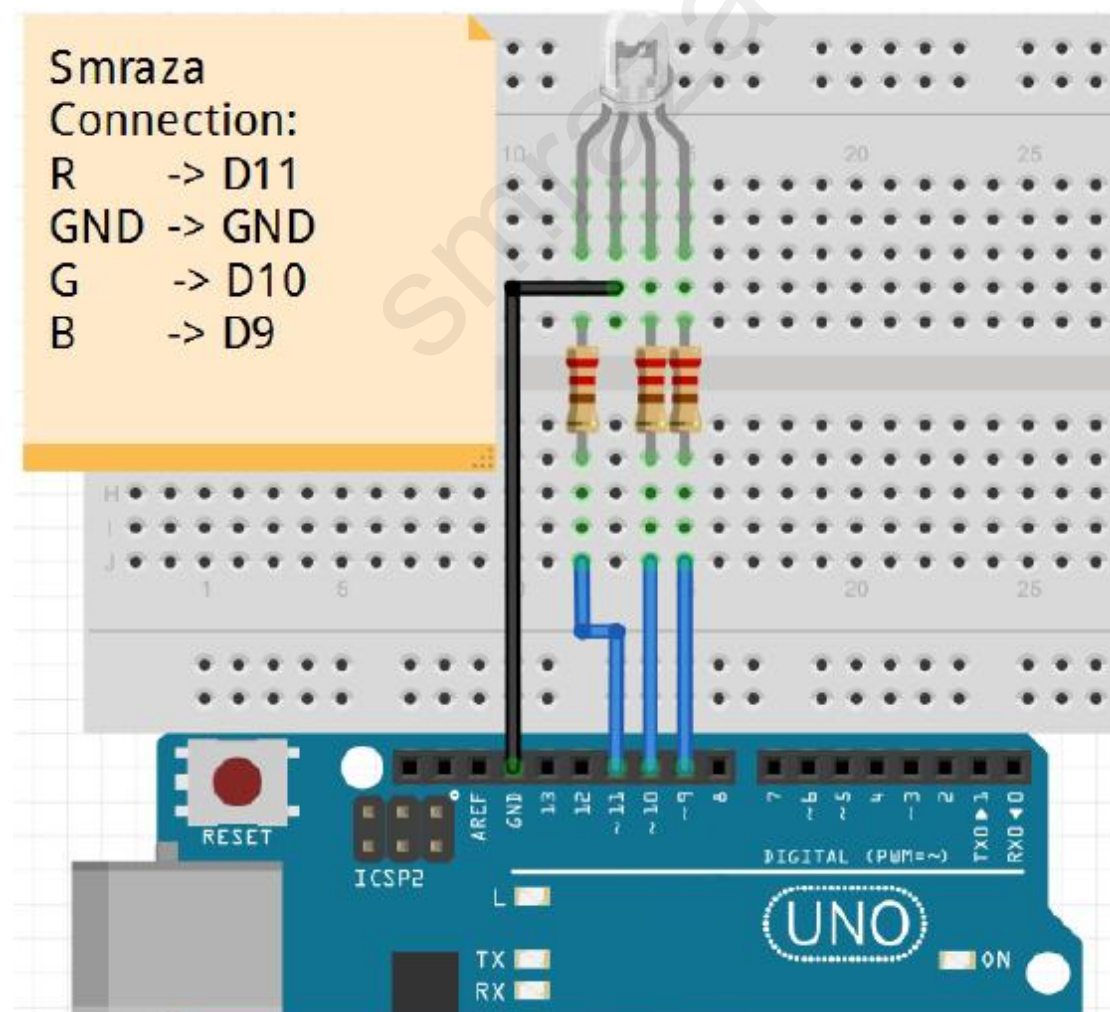

Note: The longest pin of the RGB LED is connected to the GND.

## Sample code

Note: sample code under the **Sample code** folder

```
int redPin = 11;
int greenPin = 10;
int bluePin = 9;


//uncomment this line if using a Common Anode LED
//#define COMMON_ANODE

void setup()
{
    pinMode(redPin, OUTPUT);
    pinMode(greenPin, OUTPUT);
    pinMode(bluePin, OUTPUT);
}

void loop()
{
    setColor(255, 0, 0); // red
    delay(1000);
    setColor(0, 255, 0); // green
    delay(1000);
    setColor(0, 0, 255); // blue
    delay(1000);
    setColor(255, 255, 0); // yellow
    delay(1000);
    setColor(80, 0, 80); // purple
    delay(1000);
    setColor(0, 255, 255); // aqua
    delay(1000);
}

void setColor(int red, int green, int blue) // This is the function that we build.
{
    #ifndef COMMON_ANODE
    red = 255 - red;
    green = 255 - green;
    blue = 255 - blue;
    #endif
    analogWrite(redPin, red);
    analogWrite(greenPin, green);
    analogWrite(bluePin, blue);
}
```

## Example picture

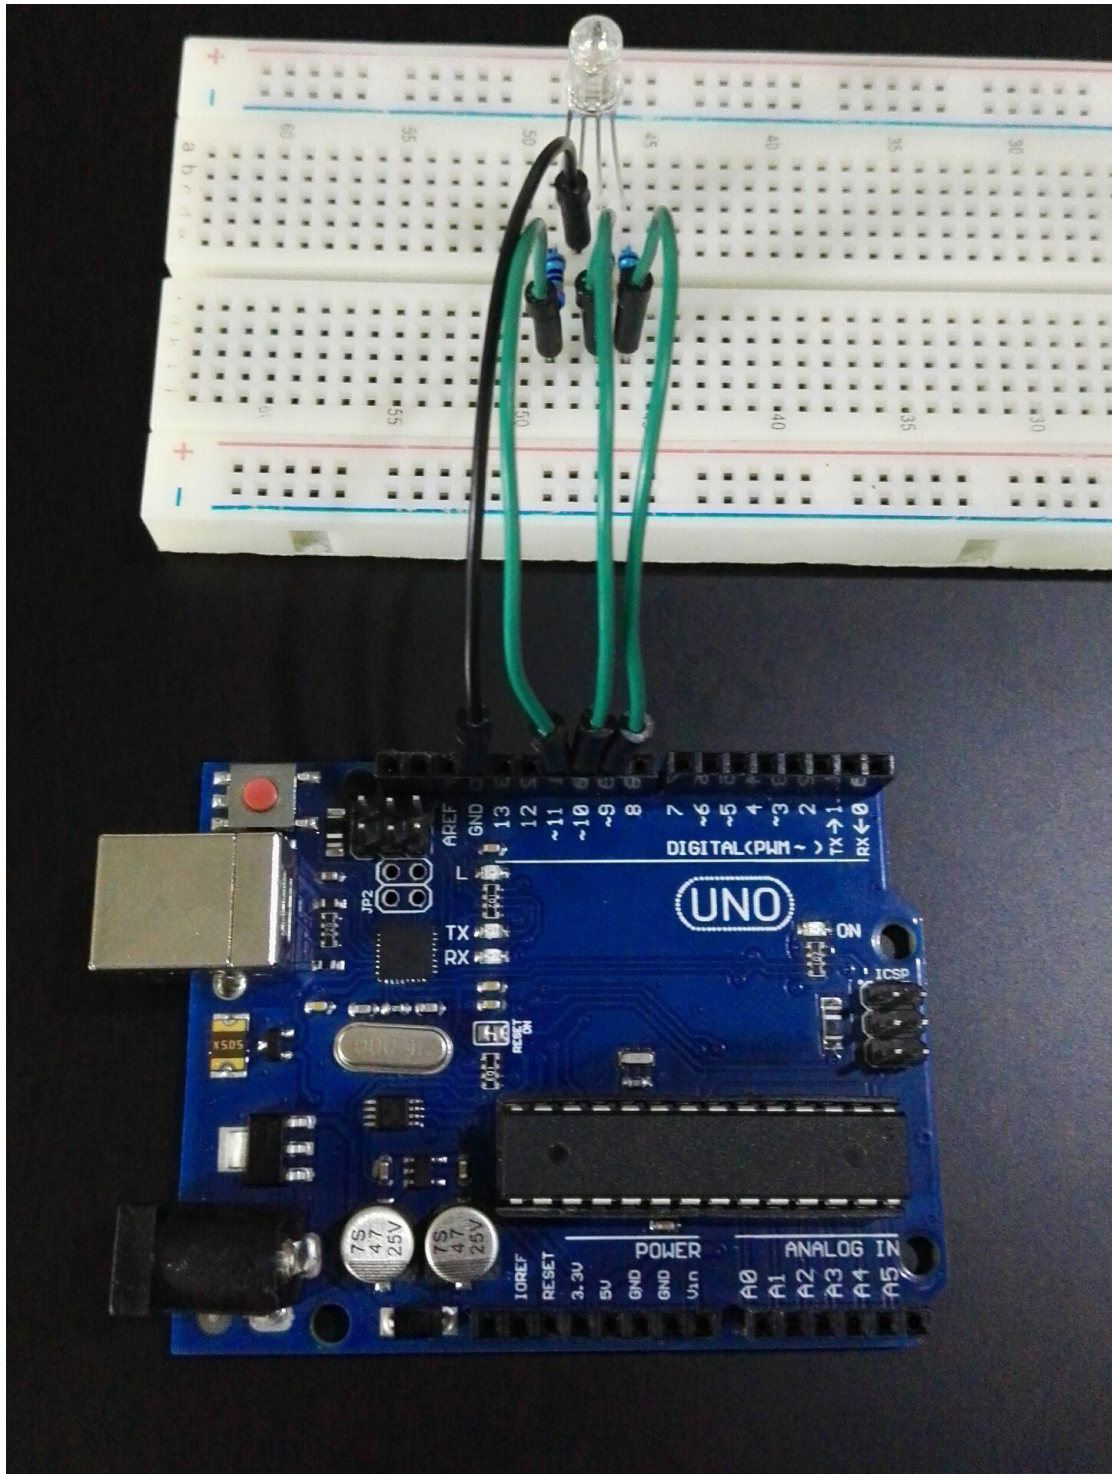

## Language reference

**Tips** : click on the following name to jump to the web page.

If you fail to open, use the Adobe reader to open this document.

[analogWrite\(\)](#)

[#define](#)

## Application effect

When the program is uploaded, you will see the LED loop emit 7 different colors of light.

\*\*\*\*\*

\* About Smraza:

\* We are a leading manufacturer of electronic components for Arduino and Raspberry Pi.

\* Official website: <http://www.smraza.com/>

\* We have a professional engineering team dedicated to providing tutorials and support to help you get started.

\* If you have any technical questions, please feel free to contact our support staff via email at [support@smraza.com](mailto:support@smraza.com)

\* We truly hope you enjoy the product, for more great products please visit our

Amazon US store: <http://www.amazon.com/shops/smraza>

Amazon CA store: <https://www.amazon.ca/shops/AMIHZKLK542FQ>

Amazon UK store: <http://www.amazon.co.uk/shops/AVEAJYX3AHG8Q>

Amazon DE store: <http://www.amazon.de/shops/AVEAJYX3AHG8Q>

Amazon FR store: <http://www.amazon.fr/shops/AVEAJYX3AHG8Q>

Amazon IT store: <http://www.amazon.it/shops/AVEAJYX3AHG8Q>

Amazon ES store: <https://www.amazon.es/shops/AVEAJYX3AHG8Q>

\*\*\*\*\*