

WhyCan Forum (Wow cool developer community)

[plate](#)[change batch](#)[Essence](#)[front page](#)[search](#)[register](#)[Log in](#)[Taobao](#)

you have not logged in.

[Subject: Active](#) | [No Reply](#)[front page](#) >> [SigmaStar/SSD201/SSD202/SSD212](#)>> [SSD20X directly compiles lvgl7.10 with double buffering \(with source code\)](#)

Pages: 1

[Share the link / only see the landlord](#)

landlord 2021-02-23 22:29:24

[share a comment](#) #1**TeveT****member**

Registration time: 2019-07-01

Posts: 134

Credits: 77



As the title, last weekend should be invited by the halo brother to solve the next small problem.

There are quite a few friends in the Qiming Cloud group who need this thing. The hardware platform is a 7-inch 1024x600 ssd202 development board, which comes with a demo of the ordering system, which is directly packaged and sent to the network disk:

Link: <https://pan.baidu.com/s/117lyj1uTxC-Rt66Co07wLA>

Extraction code: fkk5

After the release, you can make it directly under the condition of configuring the cross compiler. The executable file is demossd and uploaded here.

[demossd.zip](#)

Pay attention to a few details:

1. Note that the Makefile of my code depends on the project folder of the source code of SSD20X. The structure is as follows:

|— LVGL7.10-SSD202

| |— export-ssd20x-gcc.sh

```
| |— gcc-arm-8.2-2018.08-x86_64-arm-linux-gnueabihf  
| |— linux_frame_buffer  
|— project
```

2. After releasing the code, read the Makefile or modify your structure so that it can be called to the project directory.

3. In addition, the ssd20x platform is quite different. Before using fb, you need to configure the hardware information.

I have no brains and use it directly. You can read sstardisp.c. I directly carry the JpegPlayer of the source code of the ssd20x development board

. lv_demo_music I changed some parameters, the size of the drop-down window is different from the original demo program. I'm not going to change it back anyway, it's just for fun.

5. Pay attention to modify the buffer size of the double buffer to modify /config/fbdev.ini and modify the buffer to 2 times the size of 4800x1024 (the original is 4096, if it is not changed, it will cause a segmentation fault)

```
FB_BUFFER_LEN = 4800
```

Well, compile and run, let's fly.

The video is the effect of running the printer demo

0:00

A video player interface with a progress bar. The progress bar is a horizontal line with a white fill and a grey border. The time 0:00 is displayed on the left side of the bar.

offline	The following is downloaded from the landlord's Baidu network disk by @ wow cool little housekeeper ----- Station download: LVGL7.10-linux_framebuffer-SSD202-TEVET-PACK-20210223.tar.7z (about 65M) <i>Recent edits by TeveT (2021-02-23 23:48:29)</i>
2021-02-24 09:17:07 share a comment #2	
wlcccccc member Registration time: 2019-12-06 Posts: 72 Credits: 67.5 offline	The big guy's cowhide takes off
2021-02-24 20:39:20 share a comment #3	
fogwizard member Registration time: 2019-03-19 Posts: 38 Credits: 18 offline	With the enthusiastic help of the great god, the demo ran, and there was almost no tearing when sliding, which was a few streets better than a single buffer!
landlord 2021-02-24 20:54:15 share a comment #4	
TeveT member Registration time: 2019-07-01 Posts: 134 Credits: 77	There will be no tearing, you can take a super slow motion picture with your mobile phone to know, fogwizard said: With the enthusiastic help of the great god, the demo ran, and there was almost no tearing when sliding, which was a few streets better than a single buffer!

offline	
2021-02-25 10:11:56 share a comment #5	
Darkrod member Registration time: 2018-04-10 Posts: 1,095 Credits: 1057.5 offline	Optical double buffering, no vsync processing, there should still be a small probability of tearing
landlord 2021-02-25 10:16:58 share a comment #6	
TeveT member Registration time: 2019-07-01 Posts: 134 Credits: 77 offline	Um? How do you understand it? It means that under double buffering, when the hardware disp controller is reading the frame, does the vsync mechanism mean that the current frame will not be filled when it is used? Darkrod said: Optical double buffering, no vsync processing, there should still be a small probability of tearing
2021-02-25 10:50:31 share a comment #7	
Darkrod member Registration time: 2018-04-10 Posts: 1,095 Credits: 1057.5	TeveT said: Um? How do you understand it? It means that under double buffering, when the hardware disp controller is reading the frame, does the vsync mechanism mean that the current frame will not be filled when it is used? Darkrod said: Optical double buffering, no vsync processing, there should still be a small probability of tearing

I am afraid that when the buffer buff address is cut, if it happens during the frame reading process, it will also cause the screen to tear. It feels like it has something to do with hardware design and drivers, maybe some SOC hardware can guarantee that switching addresses directly won't cause problems. However, I see that many SOC's still explicitly require to cut the buffer at the frame interruption.

DRM's documentation has instructions about this double buffering and VSync:

<https://github.com/dvdrhm/docs/blob/master/drm-howto/modeset-double-buffered.c>

<https://github.com/dvdrhm/docs/blob/master/drm-howto/modeset-vsync.c>

If you run this example, you will notice that there is almost no flickering,
 * anymore. The buffers are now swapped as a whole so each new frame shows
 * always the whole new image. If you look carefully, you will notice that the
 * modeset.c example showed many screen corruptions during redraw-cycles.
 *
 * However, this example is still not perfect. Imagine the display-controller is
 * currently scanning out a new image and we call `drmModeSetCrtc()`
 * simultaneously. It will then have the same effect as if we used a single
 * buffer and we get some tearing. But, the chance that this happens is a lot
 * less likely as with a single-buffer. This is because there is a long period
 * between each frame called vertical-blank where the display-controller does
 * not perform a scanout. If we swap the buffers in this period, we have the
 * guarantee that there will be no tearing. See the `modeset-vsync.c` example if
 * you want to know how you can guarantee that the swap takes place at a
 * vertical-sync.

According to this understanding, even if the hardware supports arbitrary cut buffering without causing screen tearing, there will still be problems. When the drawing refresh rate is unstable, it may cause frame drops. You can imagine that if you don't cut the buffer at the v-blank time in one frame, you may just miss the data of the current frame. So there is generally an option in PC games to lock the frame and refresh to the graphics card vsync

offline

landlord 2021-02-25 11:21:53

[share a comment](#) #8

TeveT

master, learned

member

Registration time: 2019-07-01

Posts: 134

Credits: 77

Darkrod said:**TeveT said:**

Um? How do you understand it? It means that under double buffering, when the hardware disp controller is reading the frame, does the vsync mechanism mean that the current frame will not be filled when it is used?

Darkrod said:

Optical double buffering, no vsync processing, there should still be a small probability of tearing

I am afraid that when the buffer buff address is cut, if it happens during the frame reading process, it will also cause the screen to tear. It feels like it has something to do with hardware design and drivers, maybe some SOC hardware can guarantee that switching addresses directly won't cause problems.

However, I see that many SOC's still explicitly require to cut the buffer at the frame interruption.

DRM's documentation has instructions about this double buffering and VSync:

<https://github.com/dvdrhm/docs/blob/master/drm-howto/modeset-double-buffered.c>

<https://github.com/dvdrhm/docs/blob/master/drm-howto/modeset-vsync.c>

If you run this example, you will notice that there is almost no flickering,
* anymore. The buffers are now swapped as a whole so each new frame shows
* always the whole new image. If you look carefully, you will notice that the
* modeset.c example showed many screen corruptions during redraw-cycles.
*
* However, this example is still not perfect. Imagine the display-controller is
* currently scanning out a new image and we call `drmModeSetCrtc()`
* simultaneously. It will then have the same effect as if we used a single
* buffer and we get some tearing. But, the chance that this happens is a lot
* less likely as with a single-buffer. This is because there is a long period
* between each frame called vertical-blank where the display-controller does
* not perform a scanout. If we swap the buffers in this period, we have the
* guarantee that there will be no tearing. See the `modeset-vsync.c` example if

- * you want to know how you can guarantee that the swap takes place at a
- * vertical-sync.

According to this understanding, even if the hardware supports arbitrary cut buffering without causing screen tearing, there will still be problems. When the drawing refresh rate is unstable, it may cause frame drops. You can imagine that if you don't cut the buffer at the v-blank time in one frame, you may just miss the data of the current frame. So there is generally an option in PC games to lock the frame and refresh to the graphics card vsync

offline

2021-02-27 16:36:44

[share a comment](#) #9**SigmaStarStudy**

member

Registration time: 2021-02-15

Posts: 34

Credits: 34

Thanks for the guidance of the host, finally got it,

This step must be done:

5. Note that when modifying the buffer size of the double buffer, you need to modify **/config/fbdev.ini** to modify the buffer size to 2 times the size of 4800x1024 (the original is 4096, if it is not changed, it will cause a segfault)

FB_BUFFER_LEN = 4800

offline

landlord 2021-02-28 12:27:52

[share a comment](#) #10**TeveT**

member

Registration time: 2019-07-01

Posts: 134

Credits: 77

Hahahaha, really, you need to open your mind to do this, but how do you feel that your number is the waistcoat of Brother Halo?

SigmaStarStudy says:

Thanks for the guidance of the host, finally got it,

This step must be done:

5. Note that when modifying the buffer size of the double buffer, you need to modify **/config/fbdev.ini** to modify the buffer size to 2 times the size of 4800x1024 (the original is 4096, if it is not changed, it will cause a segfault)

FB_BUFFER_LEN = 4800

offline

2021-03-01 09:40:05

[share a comment](#) #11

armstrong

member



Registration time: 2019-04-10

Posts: 225

Credits: 194.5

offline

Darkrod is right

2021-03-01 14:20:23

[share a comment](#) #12

SigmaStarStudy

member

Registration time: 2021-02-15

Posts: 34

Credits: 34

offline

Thanks to the landlord for sharing, package the application and the file system together rootfs.ubifs:
[rootfs.ubifs.lvgl_demo\(20210301\).7z](#)

Burn with tftp under u-boot:

```
ubi part UBI;tftp 0x20000000 rootfs.ubifs; ubi write 0x20000000 rootfs ${filesize};reset
```

2021-03-01 14:45:27

[share a comment](#) #13

SigmaStarStudy

member

Or you can burn this rootfs.ubi file: [rootfs.ubifs.lvgl_demo\(20210301\).7z](#)

Registration time: 2021-02-15
Posts: 34
Credits: 34

Burn command:

```
nand erase 0xf20000 0xA000000;tftp 0x20000000 rootfs.ubi;nand write 0x20000000  
0xf20000 ${filesize};reset;
```

offline

2021-03-02 12:47:48

[share a comment](#) #14

SigmaStarStudy

member

Registration time: 2021-02-15
Posts: 34
Credits: 34


Integrated package to burn firmware:

[ssd202-7inch-1024x600-spinand-20210302.7z](#)

u-boot programming instructions:

```
setenv serverip 192.168.1.99;setenv ipaddr 192.168.1.33;nand erase 0x0 0x8000000;tftp  
0x20000000 ssd202-7inch-1024x600-spinand-20210302.bin;nand write 0x20000000 0x0  
${filesize};
```

Or burn with official burner (very slow, not recommended!):

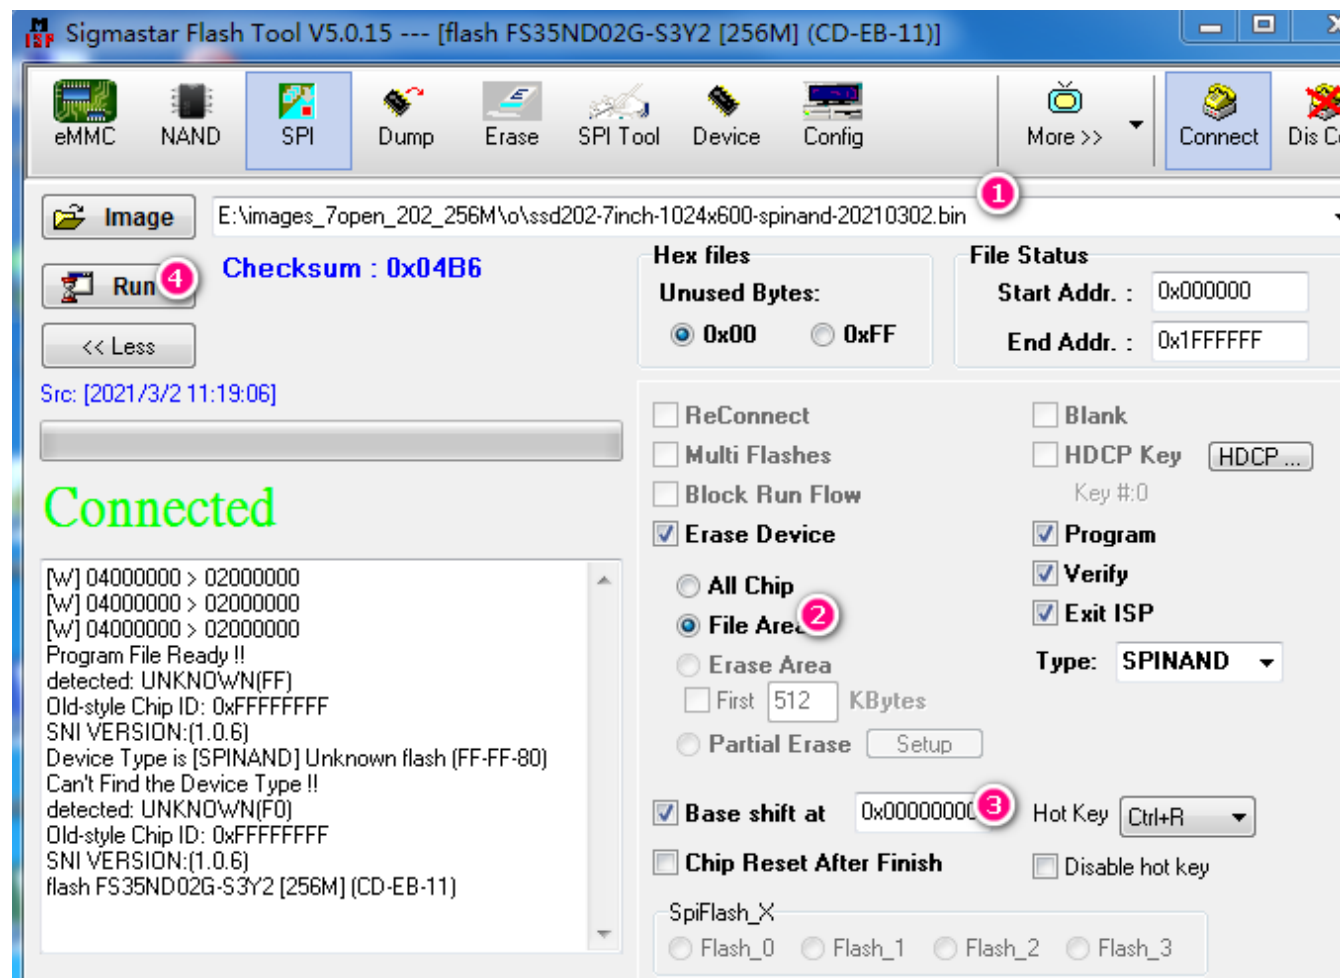

offline

landlord 2021-03-02 13:31:48

[share a comment](#) #15

TeveT

member

Registration time: 2019-07-01

Posts: 134

Thanks for sharing, one step at a time,

SigmaStarStudy says:

Credits: 77 offline	Integrated package to burn firmware: ssd202-7inch-1024x600-spinand-20210302.7z u-boot programming instructions: <pre>setenv serverip 192.168.1.99;setenv ipaddr 192.168.1.33;nand erase 0x0 0x8000000;tftp 0x20000000 o/sysimage-nand.img;nand write 0x20000000 0x0 \${filesize};</pre> Official burner burning: https://whycan.com/files/members/5985/2021-03-02_124657.png
2021-03-05 16:25:37 share a comment #16	
caszhao member Registration time: 2021-03-02 Posts: 11 Credits: 11 offline	Add rotation on the basis of the landlord, open source: https://github.com/caszhao/ssd_lvgl
landlord 2021-03-06 08:43:45 share a comment #17	
TeveT member Registration time: 2019-07-01 Posts: 134 Credits: 77 offline	Big guy, open another post, go to the top caszhao said: Add rotation on the basis of the landlord, open source: https://github.com/caszhao/ssd_lvgl
2021-03-06 11:46:49 share a comment #18	

caszhao member Registration time: 2021-03-02 Posts: 11 Credits: 11 离线	TeveT 说 : 大佬另开个帖子呀 · 顶上去 caszhao 说 : 在楼主的基础上增加rotation · 开源了 : https://github.com/caszhao/ssd_lvgl 没事 · 需要的人才需要 · 不需要的也不会需要
2021-04-21 12:08:13 分享评论 #19	
981378640 会员 注册时间 : 2021-04-21 已发帖子 : 3 积分 : 13.5 离线	楼主啊 · 如何显示外部的jpg图片啊 ? 有没有Demo参考一下啊
楼主 2021-04-21 14:54:37 分享评论 #20	
TeveT 会员 注册时间 : 2019-07-01 已发帖子 : 134 积分 : 77 离线	详细请看 JpegPlayer · 代码包有的
2021-04-24 08:22:00 分享评论 #21	

海石生风

会员

注册时间：2019-07-02

已发帖子：141

积分：239

达克罗德 说：

TeveT 说：

嗯？怎么理解呢，意思是，双缓冲下，在硬件disp控制器读帧过程中顿一下么，vsync机制是当前帧被使用的时候不会被填充么

达克罗德 说：

光双缓冲，没有vsync处理，应该还是有小概率产生撕裂吧

就怕切缓冲buff地址时候，如果发生在读帧过程中，一样会导致画面撕裂。感觉和硬件设计和驱动程序有关，也许某些SOC硬件可以保证直接切换地址不会导致问题。

不过我看许多SOC都还是明确要求在帧中断去切缓冲。

DRM的文档有关于这个双缓冲和VSync的说明：

<https://github.com/dvdrhm/docs/blob/master/drm-howto/modeset-double-buffered.c>

<https://github.com/dvdrhm/docs/blob/master/drm-howto/modeset-vsync.c>

If you run this example, you will notice that there is almost no flickering,
* anymore. The buffers are now swapped as a whole so each new frame shows
* always the whole new image. If you look carefully, you will notice that the
* modeset.c example showed many screen corruptions during redraw-cycles.
*
* However, this example is still not perfect. Imagine the display-controller is
* currently scanning out a new image and we call drmModeSetCrtc()
* simultaneously. It will then have the same effect as if we used a single
* buffer and we get some tearing. But, the chance that this happens is a lot
* less likely as with a single-buffer. This is because there is a long period
* between each frame called vertical-blank where the display-controller does
* not perform a scanout. If we swap the buffers in this period, we have the
* guarantee that there will be no tearing. See the modeset-vsync.c example if
* you want to know how you can guarantee that the swap takes place at a
* vertical-sync.

根据这个理解，即使硬件支持任意切缓冲不会导致画面撕裂，也还是会有问题。当绘图刷新率不稳定的时候，有可能导致掉帧现象。你可以想象在一帧的时间里，如果不在v-blank时间来切缓冲，有可能刚好错过当前这一帧的数据。所以PC游戏里一般有个选项，锁定帧刷新到显卡vsync

那是只有硬件不支持双缓冲才出现的情况，现在的芯片只要支持LCD接口都会支持双缓冲。

离线

2021-05-28 20:59:56

[分享评论](#) #22

duanchangstar

会员

注册时间：2019-10-29

已发帖子：14

积分：12

离线

楼主很厉害啊，可以顺便搞一下AWTK的双缓冲吗

楼主 2021-05-28 22:14:19

[分享评论](#) #23

TeveT

会员

注册时间：2019-07-01

已发帖子：134

积分：77

离线

咋说，awtk 本地编译有包吗，我弄来看看

duanchangstar 说：

楼主很厉害啊，可以顺便搞一下AWTK的双缓冲吗

2021-05-28 22:16:32

[分享评论](#) #24

cube

会员

注册时间：2021-03-11

已发帖子：274

积分：188.5

TeveT 说：

咋说，awtk 本地编译有包吗，我弄来看看

duanchangstar 说：

楼主很厉害啊，可以顺便搞一下AWTK的双缓冲吗

<https://github.com/zlgopen/awtk>

离线

楼主 2021-05-28 22:29:54

分享评论 #25

TeveT

会员

注册时间：2019-07-01

已发帖子：134

积分：77

好滴，感谢分享，搞搞看

cube 说：

TeveT 说：

咋说，awtk 本地编译有包吗，我弄来看看

duanchangstar 说：

楼主很厉害啊，可以顺便搞一下AWTK的双缓冲吗

<https://github.com/zlgopen/awtk>

离线

2021-05-28 23:22:52

分享评论 #26

duanchangstar

会员

注册时间：2019-10-29

已发帖子：14

积分：12

已经搞定了AWTK的双缓冲，使用了楼主的方法。感谢~

离线

2021-05-29 00:10:03

分享评论 #27

cube

会员

注册时间：2021-03-11

已发帖子：274

积分：188.5

离线

duanchangstar 说：

已经搞定了AWTK的双缓冲，使用了楼主的方法。感谢~

方便分享一下diff差异文件吗？

楼主 2021-05-29 11:12:39

[发表评论](#) #28**TeveT**

会员

注册时间：2019-07-01

已发帖子：134

积分：77

离线

看来楼上的楼上大佬已经了解了fb的操作过程，改起来应当是大同小异哈，

cube 说：**duanchangstar 说：**

已经搞定了AWTK的双缓冲，使用了楼主的方法。感谢~

方便分享一下diff差异文件吗？

2021-05-30 00:07:41

[发表评论](#) #29**duanchangstar**

会员

注册时间：2019-10-29

已发帖子：14

积分：12

离线

cube 说：**duanchangstar 说：**

已经搞定了AWTK的双缓冲，使用了楼主的方法。感谢~

方便分享一下diff差异文件吗？

按楼主的方法做就行了

楼主 2021-05-30 12:51:03

分享评论 #30

TeveT

会员

注册时间：2019-07-01

已发帖子：134

积分：77

都嘛系开源的东西，修改了抛上来共享下大大滴好，
如果有小毛病被鞭尸后还能共同进步，来嘛来嘛

duanchangstar 说：**cube 说：****duanchangstar 说：**

已经搞定了AWTK的双缓冲，使用了楼主的方法。感谢~

方便分享一下diff差异文件吗？

按楼主的方法做就行了

最近编辑记录 TeveT (2021-05-30 12:51:20)

离线

2021-05-30 17:27:55

分享评论 #31

novice

会员

注册时间：2019-07-26

已发帖子：84

积分：80

这个SSD20X有没有公开资料？

离线

楼主 2021-05-30 20:37:29

分享评论 #32

TeveT

会员

注册时间：2019-07-01

有公开啊，但是没有全部公开。
比较暧昧吧，没有TRM

已发帖子：134 积分：77 离线	novice 说： 这个SSD20X有没有公开资料？
2021-09-02 12:16:43 分享评论 #33	
weiyongwill 会员 注册时间：2019-08-08 已发帖子：56 积分：39.5 离线	我自己搞了个demo，提示缺少库文件 libmi_disp.so
楼主 2021-09-02 12:22:49 分享评论 #34	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	注意下我帖子里描述的依赖路径project 还有lvgl 的Makefile 你的这个缺少的库在这个路径下面： SDK_LIBS=../project/release/nvr/i2m/common/glibc/8.2.1/mi_libs/dynamic weiyongwill 说： 我自己搞了个demo，提示缺少库文件 libmi_disp.so
2021-09-02 16:02:55 分享评论 #35	
regbbs 会员 注册时间：2020-04-06 已发帖子：43 积分：29.5 离线	lvgl_v8.zip 8.0的，lv_driver替换的时候注意不要把文件覆盖了。 其实lvgl的git上面有linux的移植，基于frame buffer。只要把ssd20x的特定初始化部分添加上就可以。

楼主 2021-09-02 19:48:02 分享评论 #36	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	对这个帖子就是拉lvgl fb 改的，加入了你说的初始化部分，只是填坑 regbbs 说： lvgl_v8.zip 8.0的，lv_driver替换的时候注意不要把文件覆盖了。 其实lvgl的git上面有linux的移植，基于frame buffer。只要把ssd20x的特定初始化部分添加上就可以。
2021-11-30 13:23:37 分享评论 #37	
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9 离线	为啥我使用上传的文件之后编译会报错： <pre>../lv_drivers/indev/evdev.c:18:10: fatal error: linux/input.h: No such file or directory #include <linux/input.h> ^~~~~~ compilation terminated. make: *** [lv_drivers/indev/subdir.mk:41: lv_drivers/indev/evdev.o] Error 1 "make all" terminated with exit code 2. Build might be incomplete.</pre>
楼主 2021-11-30 14:31:50 分享评论 #38	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@pencil 芜湖？建议使用我网盘上传的试一下。 坛主上传的我不太清楚呢，毕竟下载要分数。
2021-11-30 16:13:23 分享评论 #39	

pencil

会员

注册时间：2021-11-03

已发帖子：14

积分：9

离线

我使用你的在windows本地编译也是报错,是需要将它放到服务器上编译吗?

2021-11-30 16:14:58

[分享评论](#) #40**pencil**

会员

注册时间：2021-11-03

已发帖子：14

积分：9

离线

放在服务器下编译,还是报很多错,我一时也搞不明白

楼主 2021-11-30 17:10:02

[分享评论](#) #41**TeveT**

会员

注册时间：2019-07-01

已发帖子：134

积分：77

离线

pencil 说：

放在服务器下编译,还是报很多错,我一时也搞不明白

注意project的目录，注意阅读一下Makefile

```
├── LVGL7.10-SSD202
│   ├── export-ssd20x-gcc.sh
│   ├── gcc-arm-8.2-2018.08-x86_64-arm-linux-gnueabi
│   ├── linux_frame_buffer
│   └── project
```

2021-12-04 12:18:23

[分享评论](#) #42

zhou

会员

注册时间：2019-07-09

已发帖子：6

积分：2

请问 我这边接入LVGL后 显示 一亮一灭 这个是怎么导致的？显示是有的。一般是哪部分引起的现象。

0:00

离线

楼主 2021-12-04 13:10:24

[发表评论](#) #43

TeveT

会员

注册时间：2019-07-01

已发帖子：134

积分：77

离线

zhou 说：

请问 我这边接入LVGL后 显示 一亮一灭 这个是怎么导致的？显示是有的。一般是哪部分引起的现象。
<https://whycan.com/files/members/1813/d61c12ed6a33ecb12217fcbc4a816478.mp4>

5、注意修改双缓的缓冲区大小

要修改 /config/fbdev.ini 修改缓冲区到2倍的大小 4800x1024 （原来是4096, 不改会段错误）

FB_BUFFER_LEN = 4800

你的机器不是开发板的话，需要自己计算一下，修改一下

2021-12-04 15:52:28

[发表评论](#) #44**zhou**

会员

注册时间：2019-07-09

已发帖子：6

积分：2

离线

@TeveT

您好 同缓存大小 我加到8192了，接入LVGL8单缓存是能正常使用的，接入这个7.10双缓的就是会闪屏，是因为在切换双缓存导致的吗？

楼主 2021-12-04 16:37:21

[发表评论](#) #45**TeveT**

会员

注册时间：2019-07-01

已发帖子：134

积分：77

zhou 说：

@TeveT

您好 同缓存大小 我加到8192了，接入LVGL8单缓存是能正常使用的，接入这个7.10双缓的就是会闪屏，是因为在切换双缓存导致的吗？

我代码里是写了除以2后刚好是整屏幕大小，你的这个buffer 如果没有另作他用，我的代码不修改的前提下，你的buffer大小也要写成固定的你的屏幕的缓冲区的2倍才行的，不会算的话你可以报上来你的屏幕尺寸大小我给你个数值也行。

离线	
	楼主 2021-12-04 16:39:14 分享评论 #46
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	zhou 说： @TeveT 您好 同缓存大小 我加到8192了，接入LVGL8单缓存是能正常使用的，接入这个7.10双缓的就是会闪屏，是因为在切换双缓存导致的吗？ 计算很简单的 我之所以修改为 4800 是因为 $1024 \times 600 \times 4 \times 2 / 1024 = 4800$ $H \times V \times \text{单一像素字节数量} \times 2(\text{双缓冲}) / 1024$
	2021-12-13 14:42:06 分享评论 #47
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9 离线	@TeveT 使用网盘下载的，首先是报错了error: 'for' loop initial declarations are only allowed in C99 mode，在解决了这个问题之后又报错了lv_drivers/display/fbdev.c:112:12: error: variable 'tv1' has initializer but incomplete type lv_drivers/display/fbdev.c:112:20: error: storage size of 'tv1' isn't known lv_drivers/display/fbdev.c:113:12: error: variable 'tv2' has initializer but incomplete type lv_drivers/display/fbdev.c:113:20: error: storage size of 'tv2' isn't known
	楼主 2021-12-13 15:36:46 分享评论 #48
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@pencil 交叉编译器是否有导出？

2021-12-13 15:39:30		分享评论 #49
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9 离线	哪部分	
2021-12-13 15:47:03		分享评论 #50
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9 离线	TeveT 说： @pencil 交叉编译器是否有导出？ 还没,我再试一下,麻烦了	
2021-12-17 08:47:29		分享评论 #51
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9 离线	@SigmaStarStudy 请问一体打包固件是如何打包出来的	
2021-12-21 18:15:32		分享评论 #52
nydxsydt 会员 注册时间：2021-12-21	该评论内容与本帖子无关,鼓励各位坑友积极发言讨论与帖子有关的内容！	

已发帖子：10 积分：0 离线	不通过:其他
2022-01-06 10:03:41 分享评论 #53	
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9 离线	@TeveT 楼主在将这个lvgl的demo打包时候的过程步骤能分享一下吗?我自己写了一个image.mk和demo.sh打包之后系统开机花屏且显示报错信息 The framebuffer device was opened successfully. 800x480, 32bpp The framebuffer device was mapped to memory successfully. unable open evdev interface:: No such file or directory
楼主 2022-01-06 10:16:55 分享评论 #54	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@pencil 程序已经跑起来了， 你的屏幕初始化配置文件是否搞对了，分辨率，双缓大小是否能对上， 报错是没有触摸。
2022-01-06 10:46:45 分享评论 #55	
pencil 会员 注册时间：2021-11-03 已发帖子：14 积分：9	TeveT 说： @pencil 程序已经跑起来了， 你的屏幕初始化配置文件是否搞对了，分辨率，双缓大小是否能对上， 报错是没有触摸。 开机是这样的,它会先显示logo,然后开始花屏,什么都没有显示,我按照那个双缓冲来配置800*480就是3000

离线	
楼主 2022-01-06 14:19:08 分享评论 #56	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@pencil 注意看下你的屏幕初始化和你的屏幕是否是对上的，开发板是CC0702I50R_1024x600.h这个头文件做的初始化序列和液晶屏显示参数传递。 你如果logo正常，那就把logo那边显示的参数拿出来，来修改这个h文件 可以看下sstardisp.c 这些相关信息。
2022-01-14 19:25:48 分享评论 #57	
笔走天下 会员 注册时间：2021-08-13 已发帖子：98 积分：2.5 离线	强啊，这个开发板有链接吗
楼主 2022-01-14 20:13:24 分享评论 #58	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	笔走天下 说： 强啊，这个开发板有链接吗 有的，淘宝搜一下就有了，或者自己做一个。
2022-03-13 18:39:05 分享评论 #59	
future 会员	楼猪，我在移植的时候，链接动态库的时候，提示我 /usr/bin/ld: 当搜索用于 ../project/release/nvr/i2m/common/glibc/8.2.1/mi_libs/static/libmi_disp.a 时跳

注册时间：2021-11-28 已发帖子：27 积分：29 离线	过不兼容的 -lmi_disp /usr/bin/ld: 找不到 -lmi_disp /usr/bin/ld: 当搜索用于 ../project/release/nvr/i2m/common/glibc/8.2.1/mi_libs/static/libmi_panel.a 时跳 过不兼容的 -lmi_panel /usr/bin/ld: 找不到 -lmi_panel collect2: error: ld returned 1 exit status 这是啥情况啊
楼主 2022-03-13 18:56:40 发表评论 #60	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@future 大佬，你这个project要在这个makefile的上一个文件目录下存在。 这个project就是ssd202开发板的一个project的压缩包解压出来的文件夹。
2022-03-15 10:28:08 发表评论 #61	
future 会员 注册时间：2021-11-28 已发帖子：27 积分：29	TeveT 说： @future 大佬，你这个project要在这个makefile的上一个文件目录下存在。 这个project就是ssd202开发板的一个project的压缩包解压出来的文件夹。 这个我已经解决了，库文件引入路径不对，但是现在屏幕上没有任何显示，就会显示一个log，下面日志： <pre>/mnt/usb # ls aml_up~1.img demo dwinn_set ld platfo~1.rar system~1 code_1~1.deb demossd lanter~1.deb mindmo~1.pac setup_~1.rar tvcabi~1 /mnt/usb # ./demo client [881] connected, module:panel [MI_PANEL_Iclient [881] connected, module:disp nit][332]LCD env[MI_SYSCFG_GetPanelInfo 50] eTiming = 4, hdmiTx = 1 Not Fund!!! [MI_SYSCFG_GetPanelInfo 50] eTiming = 2, hdmiTx = 1 Not Fund!!!</pre>

```
[MI_SYSCFG_GetPanelInfo 50] eTiming = 8, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 9, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 10, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 6, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 7, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 11, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 13, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 12, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 14, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 5, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 3, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 38, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 50, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 40, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 43, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 41, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 44, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 42, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 46, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 50, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 45, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 50, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 22, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 23, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 30, hdmiTx = 1 Not Fund!!!  
[MI_SYSCFG_GetPanelInfo 50] eTiming = 32, hdmiTx = 1 Not Fund!!!
```

ironment is Invalid

sstar_FB_SetBlending 402 u8GOP=1,u8win=0 aType=1 u8constAlpha=255

The framebuffer device was opened successfully.

800x480, 32bpp

The framebuffer device was mapped to memory successfully.

么有lvgl的画面显示。

按照说点屏之前初始化，我main函数是这样改的，其他地方没有更改：

.....

```
int main(void)
{
    MI_PANEL_Init(E_MI_PNL_LINK_TTL); //panel 初始化
    MI_DISP_Enable(0);      //fb最终还是得经过disp，所以得初始化disp

    /*LittlevGL init*/
    lv_init();

    /*Linux frame buffer device init*/
    fbdev_init();
    .....
```

离线

楼主 2022-03-15 13:46:00

[发表评论](#) #62**TeveT**

会员

注册时间：2019-07-01

已发帖子：134

积分：77

离线

@future

屏幕还没点亮过么，logo能亮？屏幕参数头文件正确？？

2022-03-15 18:51:33

[发表评论](#) #63**海石生风**

会员

注册时间：2019-07-02

已发帖子：141

积分：239

离线

不一定要将屏幕初始化的代码放到lvgl里，可以单独搞一个初始化屏幕的可执行文件，开机时就运行在后台。



2022-03-16 14:41:13

[发表评论](#) #64**future**

会员

TeveT 说：

注册时间：2021-11-28 已发帖子：27 积分：29 离线	@future 屏幕还没点亮过么，logo能亮？屏幕参数头文件正确？？ 屏幕使用官方例子可以点亮的，zk_full_security，就这个例子，然后我把这个例子程序线程删掉运行我移植的demo，就可以正常显示了，所以应该是屏幕初始化的时候没有初始化好，sstardisp.c，直接调用这个c文件里面的初始化函数后，倒是可以显示了，但是显示的颜色不对，没有头绪了，不知道哪里出错了，大佬能帮我看下吗？
楼主 2022-03-17 09:58:14 分享评论 #65	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@future 大佬，你的现象拍照片发来看看。 另外你这个初始化没问题的话，一般不会有颜色问题。 如果是双缓冲没有弄好的话，就是要改屏幕fb的配置文件，详细看看帖子。 如果是位宽引起的颜色问题的话，查看LCD接线方式是565还是888，同时改lv_conf 来匹配你的屏幕参数 默认程序用的是888，ARGB 32bit
2022-03-18 09:20:59 分享评论 #66	
future 会员 注册时间：2021-11-28 已发帖子：27 积分：29	@TeveT 老哥，已经弄好了，其实很简单啊，是我屏参数头文件用错了，找代理商要个正确的屏幕头文件就好了，移植真的是简单的一批，都写好了，哈哈，谢谢了哈，不过不知道为啥屏幕上有一个logo的影子，在白色界面上不会显示，但是深色界面上就会看出来。

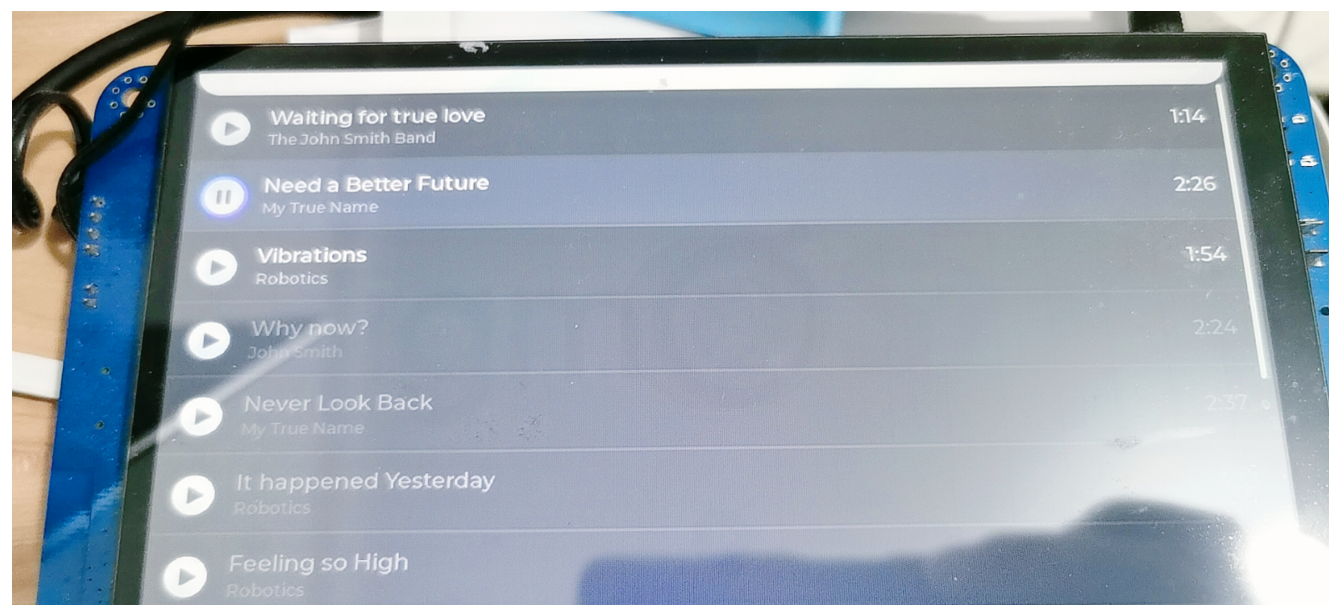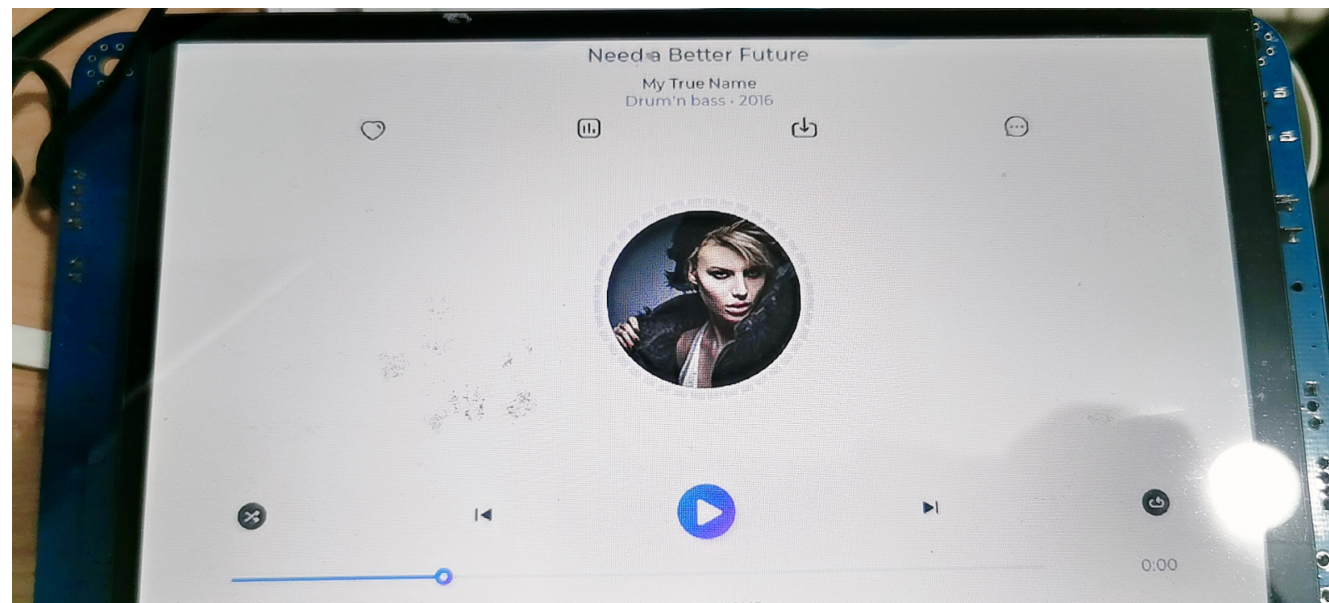

最近编辑记录 future (2022-03-18 09:49:08)

离线

2022-04-14 15:56:16

分享评论 #67

981378640

会员

注册时间：2021-04-21

已发帖子：3

积分：13.5

caszhao 说：**TeveT 说：**

大佬另开个帖子呀·顶上去

caszhao 说：

在楼主的基础上增加rotation·开源了：

https://github.com/caszhao/ssd_lvgl

没事·需要的人才需要·不需要的也不会需要

lvgl中有软件翻转rotation的设置

```
/*Initialize and register a display driver*/
static lv_disp_drv_t disp_drv;
lv_disp_drv_init(&disp_drv);
disp_drv.draw_buf = &disp_buf;
disp_drv.flush_cb = fbdev_flush;
disp_drv.hor_res = LV_HOR_RES;
disp_drv.ver_res = LV_VER_RES;
//disp_drv.full_refresh = 1; // 全刷新标志

disp_drv.sw_rotate = 1; // 软件翻转标志
g_display = lv_disp_drv_register(&disp_drv);
if (g_display != NULL)
{
    lv_disp_set_rotation(g_display, LV_DISP_ROT_90); // 设置翻转角度
}
printf("[%s:%d] screen rotated\n", __FUNCTION__, __LINE__);
```

离线

楼主 2022-04-14 16:00:26 分享评论 #68	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@future 残影问题，应该是屏幕初始化不对，偏压搞太高了，容易残影，久了会坏屏 如果前面你一直点这LOGO，没有显示其他东西，是静态的显示，也可能留下残影，如果有动态显示的画面，过一段时间会没掉，也就是，要搞个屏保图滚动
楼主 2022-04-15 09:34:36 分享评论 #69	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77 离线	@981378640 大佬，这个虽然可以用，但是还是硬加速的帧率高一些，体验好一些。你可以实测一下。
2022-05-13 15:59:13 分享评论 #70	
online 会员 注册时间：2022-05-13 已发帖子：1 积分：1 离线	大佬，我小白一枚，该如何无脑操作:(
楼主 2022-05-13 16:15:22 分享评论 #71	
TeveT 会员 注册时间：2019-07-01 已发帖子：134 积分：77	online 说： 大佬，我小白一枚，该如何无脑操作:(

离线

按照帖子说明应该是很无脑了，
如果不行贴出错误的LOG，然后一起动动脑解决一下。

页次： 1

[分享链接 / 只看楼主](#)

[首页](#) » [SigmaStar/SSD201/SSD202/SSD212](#) » [SSD20X直接编译lvg17.10带双缓 \(附源码\)](#)

论坛跳转

SigmaStar/SSD201/SSD202/SSD212



前往

[Atom](#)订阅该主题

Ministry of Industry and Information Technology for the record: [Guangdong ICP No. 20025096](#) Powered by [FluxBB](#)

Thank you to all the veterans who continue to output high-quality content for the Chinese Internet. QQ: **516333132** , WeChat (wechat): [whycan_cn](#) (Wow Cool Network / Digging Network / Filling Network) service@whycan.cn