

Xiaoming sharing|sigmstar SSD201/SSD202 LCD screen configuration operation instructions for MIPI sharing, more Sigmastar related technical documents and communication discussions, you can leave a message to Xiaoming, Xiaoming invites you to join our technical communication group

原创

Kai

Posted at 2021-01-08 14:14:47

1252 Favorites

4

copyright

Article tags: [SSD201](#) [SSD202](#) [Human-computer interaction](#) [HMI](#) [Home appliance color screen](#)

Xiaoming will regularly share SigmastarSSD201/202 related chip technical documents! We also have a Sigmastar technical communication group chat! Interested development partners can also leave a message to Xiaoming, Xiaoming invites you to enter!

The configuration of SSD20X platform LCD screen mainly involves two structures: MI_PANEL_ParamConfig_t, MI_PANEL_MipiDsiConfig_t and they are defined in: project/release/include/mi_panel_datatype.h.

Configure the PAD to be in MIPI mode: # vi infinity2m-ssc011a-s01a-padmux-display_for_mipi.dtsi Get

```
<PAD_TTL6 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH0> ,
<PAD_TTL7 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH0> ,
<PAD_TTL8 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH1> ,
<PAD_TTL9 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH1> ,
<PAD_TTL10 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH2> ,
<PAD_TTL11 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH2> ,
<PAD_TTL12 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH3> ,
<PAD_TTL13 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH3> ,
<PAD_TTL14 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH4> ,
<PAD_TTL15 PINMUX_FOR_TX_MIPI_MODE_1 MDRV_PUSE_TX_MIPI_P_CH4> ,
```

the timing table from the screen's data sheet Consistent with the TTL screen: Modify the value of ChannelSwap: The default PAD pin and the corresponding function of MIPI are as follows: If the actual circuit connection is inconsistent, you need to modify the value of ChannelSwap: The modified rules are as follows: First, group PAD and lane and clear eCh0 The meaning represented by -4 Here is an example, D0-D3 is connected to D0-D3 of the screen respectively, and CK is connected to the CK of the screen, so the following table is obtained: Modify the initialization array according to the initialization code provided by the screen factory:

Modify stMipiDsiConfig The value of : After verifying and modifying the screen parameters, you need to verify whether the display is normal. Let's use the demo of JpegPlayer to test the screen parameters. Download JpegPlayer.tar from the test

directory to the project directory and unzip it: # tar -xvf
 JpegPlayer.tar -C . # cd JpegPlayer/JpegPlayer Copy the
 modified screen parameters and corresponding resolution pictures
 to the JpegPlayer directory, And rename it to logo.jpg: Modify
 sstardisp.c, include the screen parameter header file, and set the
 corresponding resolution:

```

55 // vsync related
56 13, //MS_U16 m_uPanelVSyncWidth;          ///< VOP_U17[0], PANEL_
57 14, //MS_U16 m_uPanelVSyncBackPorch;      ///< PANEL_VSYNC_BACK_PO
58
59                                     ///< not support Manual VSync R
60                                     ///< VOP_02[10:0] Vsync start =
61                                     ///< VOP_03[10:0] Vsync end = V
62 5, //MS_U16 m_uPanelVSyncWidth;          ///< define PANEL_VSYNC_M
63 10, //MS_U16 m_uPanelVBackPorch;         ///< define PANEL_VSYNC_
64
65 // DE related
66 27, //MS_U16 m_wPanelHStart;              ///< VOP_04[11:0], PANEL
67 16, //MS_U16 m_wPanelVStart;              ///< VOP_06[11:0], PANEL
68 480, //MS_U16 m_wPanelWidth;              ///< PANEL_WIDTH, DE wid
69 480, //MS_U16 m_wPanelHeight;             ///< PANEL_HEIGHT, DE he
70
71 // CLK related
72 0, //MS_U16 m_wPanelMaxHTotal;            ///< PANEL_MAX_HTOTAL, Re
73 572, //MS_U16 m_wPanelHTotal;             ///< VOP_0C[11:0], PANEL
74 0, //MS_U16 m_wPanelMinHTotal;           ///< PANEL_MIN_HTOTAL, Re
75
76 0, //MS_U16 m_wPanelMaxVTOTAL;            ///< PANEL_MAX_VTOTAL, Re
77 510, //MS_U16 m_wPanelVTOTAL;            ///< VOP_0D[11:0], PANEL
78 0, //MS_U16 m_wPanelMinVTOTAL;           ///< PANEL_MIN_VTOTAL, Re
79
80 0, //MS_U16 m_wPanelMaxDCLE;              ///< PANEL_MAX_DCLE, Reas
81 17, //MS_U16 m_wPanelDCLE;               ///< LEFT_0F[11:0], PANEL
82 0, //MS_U16 m_wPanelMinDCLE;             ///< PANEL_MIN_DCLE, Reas
83
84                                     ///< spread spectrum
85 0, //MS_U16 m_wSpreadSpectrumStep;        ///< move to board define
86 0, //MS_U16 m_wSpreadSpectrumSpan;        ///< move to board define
87 160, //MS_U16 m_uDimmingCtrl;             ///< Initial Dimming Va
88 255, //MS_U16 m_uMaxFWNVal;               ///< Freq
89 80, //MS_U16 m_uMinFWNVal;               ///< https://blog.csdn.net/ami82

```

```

120 (MI_PANEL_ChannelSwapType_e) 2,
121 (MI_PANEL_ChannelSwapType_e) 4,
122 (MI_PANEL_ChannelSwapType_e) 3,
123 (MI_PANEL_ChannelSwapType_e) 1,
124 (MI_PANEL_ChannelSwapType_e) 0,

```

Pin Location	Ball Pin Name	Function
Pin65	PAD_TTL6	MIPI_TX_P_CH0
Pin66	PAD_TTL7	MIPI_TX_N_CH0
Pin67	PAD_TTL8	MIPI_TX_P_CH1
Pin68	PAD_TTL9	MIPI_TX_N_CH1
Pin69	PAD_TTL10	MIPI_TX_P_CH2
Pin70	PAD_TTL11	MIPI_TX_N_CH2
Pin71	PAD_TTL12	MIPI_TX_P_CH3
Pin72	PAD_TTL13	MIPI_TX_N_CH3
Pin73	PAD_TTL14	MIPI_TX_P_CH4
Pin74	PAD_TTL15	MIPI_TX_N_CH4

eCh0	Chn0 lane selection(default:2) 0:select lane0 1:select lane1 2:select lane2 3:select lane3 4:select lane4 Selected lane 将作为 clk lane 输出
eCh1	Chn1 lane selection(default:4) 0:select lane0 1:select lane1 2:select lane2 3:select lane3 4:select lane4
eCh2	Chn2 lane selection(default:3) 0:select lane0 1:select lane1 2:select lane2 3:select lane3 4:select lane4
eCh3	Chn3 lane selection(default:1) 0:select lane0 1:select lane1 2:select lane2 3:select lane3 4:select lane4
eCh4	Chn4 lane selection(default:0) 0:select lane0 1:select lane1 2:select lane2 3:select lane3 4:select lane4

<https://blog.csdn.net/ami82>

PAD_TTL6	lane0
PAD_TTL7	
PAD_TTL8	lane1
PAD_TTL9	
PAD_TTL10	lane2
PAD_TTL11	
PAD_TTL12	lane3
PAD_TTL13	
PAD_TTL14	lane4
PAD_TTL15	


<https://blog.csdn.net/ami82>

eCh0	屏的 CK 接的是哪组 lane?
eCh1	屏的 D3 接的是哪组 lane?

eCh2	屏的 D2 接的是哪组 lane?
eCh3	屏的 D1 接的是哪组 lane?
eCh4	屏的 D0 接的是哪组 lane?

eCh0	屏的 CK 接的是 lane2
eCh1	屏的 D3 接的是 lane4
eCh2	屏的 D2 接的是 lane3
eCh3	屏的 D1 接的是 lane1
eCh4	屏的 D0 接的是 lane0

<https://blog.csdn.net/ami82>

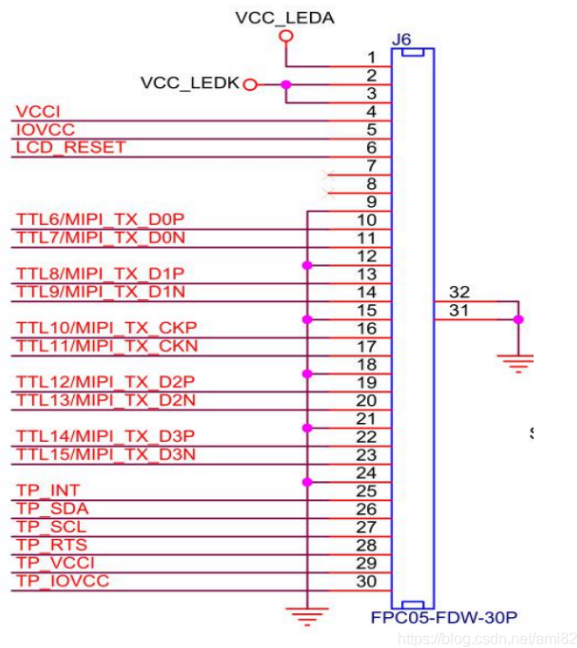

```

394 MI_US_S770108_INIT_CMD[] =
395 {
396
397   0x0fff, 0, 0x07, 0x01, 0x00, 0x00, 0x13,
398   0x002, 1, 0x00,
399   0x0fff, 0, 0x07, 0x01, 0x00, 0x00, 0x10,
400   0x002, 1, 0x00,
401   0x0c12, 0x10, 0x12,
402   0x0c22, 0, 0x00, 0x00,
403   0x0c11, 0x10,
404   0x0c13, 0x10, 0x0c5, 0x00, 0x0f, 0x04, 0x00, 0x07, 0x07, 0x1c, 0x04, 0x52, 0x0f, 0x0e, 0x22, 0x0e,
405   0x0b1, 0x16, 0x04, 0xc9, 0xc7, 0xc0, 0xc0, 0x00, 0x04, 0x00, 0x07, 0x00, 0x10, 0x0f, 0x51, 0x0f, 0x51, 0x13, 0x02, 0x07, 0xc7,
406   0x0fff, 0, 0x07, 0x01, 0x00, 0x00, 0x11,
407   0x002, 1, 0x00,
408   0x0b1, 1, 0x10,
409   0x0b3, 1, 0x00,
410   0x0b5, 1, 0x04,
411   0x0b7, 1, 0x00,
412   0x0b9, 1, 0x10,
413   0x0c14, 0x10,
414   0x0c2, 1, 0x0f,
415   0x0d0, 1, 0x00,
416   0x0d2, 1, 0x00,
417   0x0d3, 1, 0x00, 0x13, 0x07,
418   0x0d4, 0x04, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
419   0x0d5, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00, 0x00,
420   0x0d6, 0x00, 0x00, 0x00,
421   0x0d8, 0x16, 0x00, 0x11, 0xc9, 0xc9, 0xc9, 0xc9, 0x33, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9, 0xc9,
422   0xc9, 0, 0x04, 0x04,
423   0xc9, 0, 0x04, 0x04,
424   0xc9, 0, 0x04, 0x04,
425   0xc9, 0, 0x04, 0x04,
426   0xc9, 0, 0x04, 0x04,
427   0xc9, 0, 0x04, 0x04,
428   0xc9, 0, 0x04, 0x04,
429   0xc9, 0, 0x04, 0x04,
430   0xc9, 0, 0x04, 0x04,
431   0xc9, 0, 0x04, 0x04,
432   0xc9, 0, 0x04, 0x04,
433   0xc9, 0, 0x04, 0x04,
434   0xc9, 0, 0x04, 0x04,
435   0xc9, 0, 0x04, 0x04,
436   0xc9, 0, 0x04, 0x04,
437   0xc9, 0, 0x04, 0x04,
438   0xc9, 0, 0x04, 0x04,
439   0xc9, 0, 0x04, 0x04,
440   0xc9, 0, 0x04, 0x04,
441   0xc9, 0, 0x04, 0x04,
442   0xc9, 0, 0x04, 0x04,
443   0xc9, 0, 0x04, 0x04,
444   0xc9, 0, 0x04, 0x04,
445   0xc9, 0, 0x04, 0x04,
446   0xc9, 0, 0x04, 0x04,
447   0xc9, 0, 0x04, 0x04,
448   0xc9, 0, 0x04, 0x04,
449   0xc9, 0, 0x04, 0x04,
450   0xc9, 0, 0x04, 0x04,
451   0xc9, 0, 0x04, 0x04,
452   0xc9, 0, 0x04, 0x04,
453   0xc9, 0, 0x04, 0x04,
454   0xc9, 0, 0x04, 0x04,
455   0xc9, 0, 0x04, 0x04,
456   0xc9, 0, 0x04, 0x04,
457   0xc9, 0, 0x04, 0x04,
458   0xc9, 0, 0x04, 0x04,
459   0xc9, 0, 0x04, 0x04,
460   0xc9, 0, 0x04, 0x04,
461   0xc9, 0, 0x04, 0x04,
462   0xc9, 0, 0x04, 0x04,
463   0xc9, 0, 0x04, 0x04,
464   0xc9, 0, 0x04, 0x04,
465   0xc9, 0, 0x04, 0x04,
466   0xc9, 0, 0x04, 0x04,
467   0xc9, 0, 0x04, 0x04,
468   0xc9, 0, 0x04, 0x04,
469   0xc9, 0, 0x04, 0x04,
470   0xc9, 0, 0x04, 0x04,
471   0xc9, 0, 0x04, 0x04,
472   0xc9, 0, 0x04, 0x04,
473   0xc9, 0, 0x04, 0x04,
474   0xc9, 0, 0x04, 0x04,
475   0xc9, 0, 0x04, 0x04,
476   0xc9, 0, 0x04, 0x04,
477   0xc9, 0, 0x04, 0x04,
478   0xc9, 0, 0x04, 0x04,
479   0xc9, 0, 0x04, 0x04,
480   0xc9, 0, 0x04, 0x04,
481   0xc9, 0, 0x04, 0x04,
482   0xc9, 0, 0x04, 0x04,
483   0xc9, 0, 0x04, 0x04,
484   0xc9, 0, 0x04, 0x04,
485   0xc9, 0, 0x04, 0x04,
486   0xc9, 0, 0x04, 0x04,
487   0xc9, 0, 0x04, 0x04,
488   0xc9, 0, 0x04, 0x04,
489   0xc9, 0, 0x04, 0x04,
490   0xc9, 0, 0x04, 0x04,
491   0xc9, 0, 0x04, 0x04,
492   0xc9, 0, 0x04, 0x04,
493   0xc9, 0, 0x04, 0x04,
494   0xc9, 0, 0x04, 0x04,
495   0xc9, 0, 0x04, 0x04,
496   0xc9, 0, 0x04, 0x04,
497   0xc9, 0, 0x04, 0x04,
498   0xc9, 0, 0x04, 0x04,
499   0xc9, 0, 0x04, 0x04,
500   0xc9, 0, 0x04, 0x04,
501   0xc9, 0, 0x04, 0x04,
502   0xc9, 0, 0x04, 0x04,
503   0xc9, 0, 0x04, 0x04,
504   0xc9, 0, 0x04, 0x04,
505   0xc9, 0, 0x04, 0x04,
506   0xc9, 0, 0x04, 0x04,
507   0xc9, 0, 0x04, 0x04,
508   0xc9, 0, 0x04, 0x04,
509   0xc9, 0, 0x04, 0x04,
510   0xc9, 0, 0x04, 0x04,
511   0xc9, 0, 0x04, 0x04,
512   0xc9, 0, 0x04, 0x04,
513   0xc9, 0, 0x04, 0x04,
514   0xc9, 0, 0x04, 0x04,
515   0xc9, 0, 0x04, 0x04,
516   0xc9, 0, 0x04, 0x04,
517   0xc9, 0, 0x04, 0x04,
518   0xc9, 0, 0x04, 0x04,
519   0xc9, 0, 0x04, 0x04,
520   0xc9, 0, 0x04, 0x04,
521   0xc9, 0, 0x04, 0x04,
522   0xc9, 0, 0x04, 0x04,
523   0xc9, 0, 0x04, 0x04,
524   0xc9, 0, 0x04, 0x04,
525   0xc9, 0, 0x04, 0x04,
526   0xc9, 0, 0x04, 0x04,
527   0xc9, 0, 0x04, 0x04,
528   0xc9, 0, 0x04, 0x04,
529   0xc9, 0, 0x04, 0x04,
530   0xc9, 0, 0x04, 0x04,
531   0xc9, 0, 0x04, 0x04,
532   0xc9, 0, 0x04, 0x04,
533   0xc9, 0, 0x04, 0x04,
534   0xc9, 0, 0x04, 0x04,
535   0xc9, 0, 0x04, 0x04,
536   0xc9, 0, 0x04, 0x04,
537   0xc9, 0, 0x04, 0x04,
538   0xc9, 0, 0x04, 0x04,
539   0xc9, 0, 0x04, 0x04,
540   0xc9, 0, 0x04, 0x04,
541   0xc9, 0, 0x04, 0x04,
```

[illegible]

```

romiasec sd_server~/work/snd101/snd20x_sdk v000/pscpPlayer2 1s
0001-P2-MG-12M-VERIF-fix-logs=fire-line-transparent.patch  F8D480x480 MIDI.h      logg_TXW
mpc.c               PRD720x720_MIDI.h      logg_TXW
mpc.h               inc                     mpegFile
common              3peg.c                 saveFile
mpc.h               3peg.h                 mpegFile
disp_init           lib                     res
disp_init.c         logg_bkc.c              rsg
sdsm107_104x600 MIDI.h      logg_c               rsg
FPGA_80x480_60.h     logg_jpg               startdisp.h
PRD430x480_60.h     logg_no_exit
sdsm107_104x600 MIDI.h      logg_no_exit
romiasec sd_server~/work/snd101/snd20x_sdk v000/pscpPlayer2

```

<https://blog.csdn.net/ami8>

Execute make to generate the application logo:

<https://blog.csdn.net/ami8>

Copy the logo and logo.jpg to the board, then execute the application logo, and observe whether the picture is displayed normally:

./logo


Kai Mingxian
focus on
👍 2
💬 10
🌟 4
🔗

Comments 10
are not logged in, please [log](#) in to post or view comments

A cross-platform rapid prototyping tool platform for quic... 👁 5407

8ms.xyz is a free cross-platform rapid prototyping tool platform for develo...

Qiming Cloud Sharing | Espressif ESP32-S3 Voice--Text... 👁 178

As a partner of Espressif (Espressif) in Greater China and a partner of sig...

Kai Mingxian sharing | 3.5-inch serial screen application ... 👁 31

Qimingxian provides one-stop color screen display + connection + cloud s...

Kai Mingxian Sharing | 4.3-inch serial screen in outdoor ... 👁 224

Shenzhen Qimingxian Technology has launched a cost-effective serial scr...

Kai Mingxian sharing | Espressif ESP32-S3 offline voice ... 👁 511

Qi Mingxian based on Espressif ESP32-S3 and the domestic chip high-eff...

Kai Mingxian sharing | Low-cost 86 smart switch panel\... 👁 2883

Qi Mingxian based on Espressif ESP32-S3 and the domestic chip high-eff...

Kai Mingxian Sharing | 2.4-inch knob serial screen appl... 👁 6246

Based on Espressif ESP32-S3 and the domestic high-efficiency develop...

Kai Mingxian sharing | What to know about network dis... 👁 4798

Qimingxian provides one-stop color screen display + connection + cloud s...

Kai Mingxian sharing | ESP32 study notes reference - P... 644
Qimingxian provides one-stop color screen display + connection + cloud s...

Qimingxian Sharing | 4.3-inch serial screen solution sui... 4424
Qimingxian provides one-stop color screen display + connection + cloud s...

Qiming Cloud Sharing | Application of A133 Core Board ... 248
The SOM1309 developed by Qiming Cloud based on the Allwinner A133 ...

Qiming Cloud Sharing | ESP32 study notes refer to RTC... 578
As a partner of Espressif (Espressif) in Greater China and a partner of sig...

Qiming Cloud Sharing | ESP32 study notes refer to GPI... 402
As a partner of Espressif (Espressif) in Greater China and a partner of sig...

Qiming Cloud Sharing | ESP32-S3 RGB Dot Screen Tu... 1412
As a partner of Espressif (Espressif) in Greater China and a partner of sig...

Qiming Cloud Sharing | ESP32-S3 + 480*480 resolution... 254
ESP32-S3 + 480*480 resolution RGB interface 2.1-inch round screen – m...

Happy Lantern Festival | Qiming Cloud invites you to gu... 464
Qiming Cloud invites you to guess the lantern riddles together

Qiming Cloud Sharing | How much can the sigmstar SS... 871
As a partner of Espressif (Espressif) in Greater China and a partner of sig...

Qiming Cloud Sharing|Does the USB of ESP32-S3 supp... 713
As a partner of Espressif (Espressif) in Greater China and a partner of sig...

Qiming Cloud Sharing | Following the ESP32-S3 2.1-in... 3427
Following the ESP32-S3 2.1-inch screen with a resolution of 480*480, a 4...

Qiming Cloud Sharing | SSD201, SSD202D infrared inte... 413
As a partner of Espressif (Espressif) in Greater China and a partner of sig...



Kai Mingxian



222	10,000+	6343	330,000+	
original	Weekly	Overall	access	grade
Rank		ranking		
3954	507	168	335	641
integral	fan	Liked	Comment	collect



Private letter

focus on

Search blogger articles



popular articles

Exhibition Express | Qiming Cloud debuts at AWE2021: Look at the application, new technologies lead the intelligent upgrade of home appliances--Qiming Cloud's one-stop solution for WIFI\Bluetooth\smart screen wins attention; Look at the product--4-inch knob screen stunning AWE2021 24129

Consumption upgrade, color screen may become a new outlet in the home appliance industry market 22295

Qiming cloud sharing | 86 box serial screen burning instructions 8286

Problems that may be encountered during the use of ESP32-CAM  6322

Kai Mingxian sharing | 2.4-inch knob serial screen application on fitness equipment  6238

Category column

	Espressif ESP solut...	92 articles
	Android core board s...	4 articles
	SSD201 series dev...	43 articles
	8ms development to...	5 articles
	11	1 article

latest comment

Qiming Cloud Sharing | Following the ES...
qq_34855590: What should I do with the R
GB screen driver? I compiled it with the ...

Xiaoming Sharing | Iterative History of ...
Jade is not a weapon, a human being is no
t a talent without learning: to understand ...

Xiaoming sharing | LVGL debug log
KwongFai-Yeung: What is the meaning of s
tyle pot, and how to debug it?

Xiao Ming's sharing: SSD201/202 syste...
Azan 88: Mention to turn off the firewall

As a sigmastar agent - Qiming Cloud will...
m0_46388867: Qt is running, but no interfa
ce is displayed, do you know the reasor .

latest articles

Qiming Cloud Sharing | Espressif ESP32-S3
Voice--Text-to-Speech (TTS)

Kai Mingxian sharing | 3.5-inch serial screen
application how to upgrade traditional
refrigerators

Kai Mingxian Sharing | 4.3-inch serial
screen in outdoor portable power intelligent
application solution

25 articles in 2022 138 articles in 2021
59 articles in 2020

content