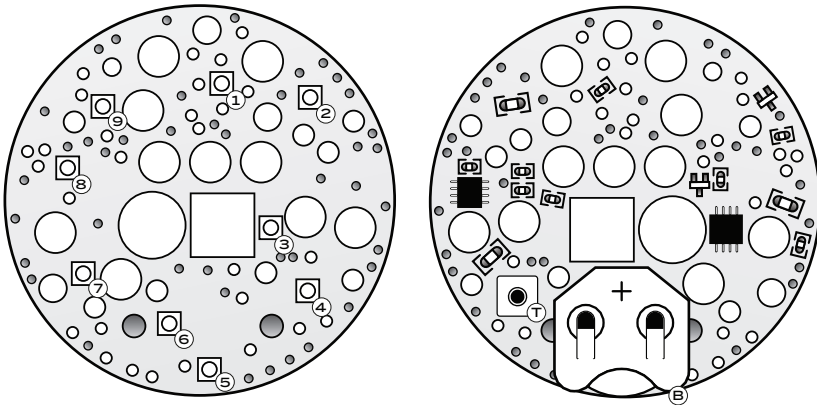# oc09 manual draft

author: Václav Mach, www.xx0x.cz

oc09 shows the time in digital format separated into single digits
14:59 = 1, 4, 5, 9

1..9 => digits ONE ... NINE
when all digits flash at once => ZERO
T => BUTTON
B => CR2032 single-use battery / LIR2032 rechargable battery

When turned on, the clock displays the time and goes to sleep for 4 seconds, then it wakes up
displays the time again. This procedure is repeated until you turn the clock off.

SHORT BUTTON CLICK
Turns on the clock and shows the time.
If woke up, the button switches between display modes (there are 5 modes).

LONG BUTTON CLICK
Opens the menu.
If menu active, opens currently selected menu option.

EXTRA LONG BUTTON CLICK
Turns off the clock.
The time is still running in the background.

MENU:
Menu is signalized by flashing red diodes 1-4.

1) Brightness
 - lower brightness means much larger battery life
2) Wake up interval
 - 4s, 8s, 16s, 24s, 48s
3) Time setting
 - the time is set in 4 steps (each step = one digit)
4) Exit

BATTERY LIFE:
approx. 2 days with CR2032 and default settings (medium brightness, mode 1, wake up interval 4s)
when not in use, keeps the time up to 1 year