


oc09 manual draft

author: Václav Mach, www.xxOx.cz

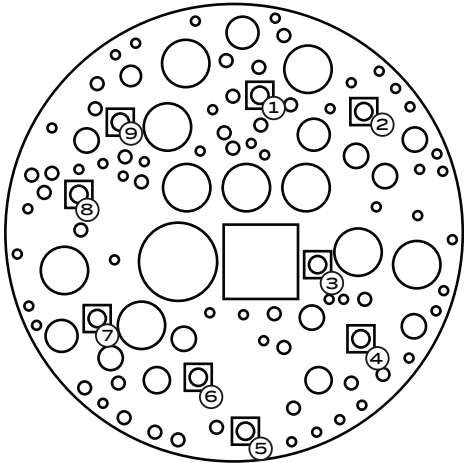

INTRODUCTION:

oc09 shows the time in digital format separated into single digits.

14:59 = 1, 4, 5, 9

When turned on, the clock displays the time and goes to sleep for 4 seconds, then it wakes up displays the time again. This procedure is repeated until you turn the clock off.

LEGEND:

1..9 => digits ONE ... NINE

when all digits flash at once => ZERO

T => BUTTON

B => CR2032 single-use battery / LIR2032 rechargeable battery

BUTTON:

- SHORT CLICK

Turns on the clock and shows the time.

If woke up, the button switches between display modes (there are 5 modes).

- LONG PRESS

Opens the menu.

If menu active, opens currently selected menu option.

- EXTRA LONG PRESS

Turns off the clock.

The time is still running in the background.

MENU:

Menu is signaled by flashing red diodes 1-4.

1) Brightness

- lower brightness means much larger battery life

2) Wake up interval

- 4s, 8s, 16s, 24s, 48s

3) Time setting

- the time is set in 4 steps (each step = one digit)

4) Exit

BATTERY LIFE:

Approx. 2 days with CR2032 and default settings (medium brightness, mode 1, wake up interval 4s). When not in use, keeps the time up to one month and beyond.