



## 1. Description

### 1.1. Project

Project Name	F401RE_IKS01_Unicleo
Board Name	NUCLEO-F401RE
Generated with:	STM32CubeMX 6.2.0
Date	04/16/2021


### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F401
MCU name	STM32F401RETx
MCU Package	LQFP64
MCU Pin number	64

### 1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

## 2. Pinout Configuration

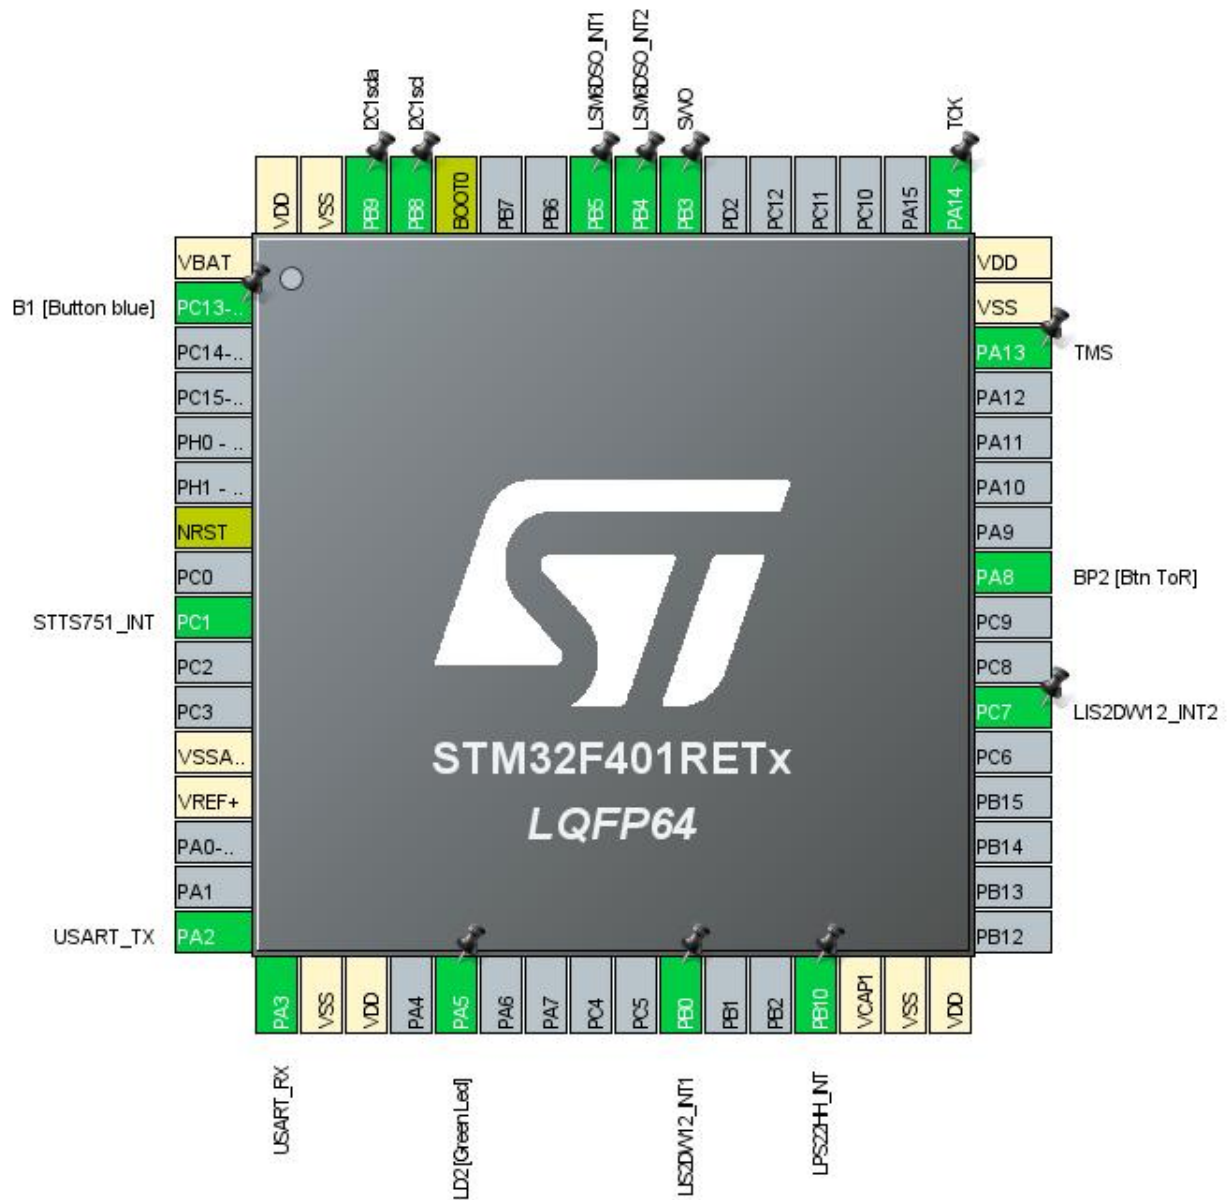

### 3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-ANTI_TAMP	I/O	GPIO_EXTI13	B1 [Button blue]
7	NRST	Reset		
9	PC1	I/O	GPIO_EXTI1	STTS751_INT
12	VSSA/VREF-	Power		
13	VREF+	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LD2 [Green Led]
26	PB0	I/O	GPIO_EXTI0	LIS2DW12_INT1
29	PB10	I/O	GPIO_EXTI10	LPS22HH_INT
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
38	PC7	I/O	GPIO_EXTI7	LIS2DW12_INT2
41	PA8 *	I/O	GPIO_Input	BP2 [Btn ToR]
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
55	PB3	I/O	SYS_JTDO-SWO	SWO
56	PB4	I/O	GPIO_EXTI4	LSM6DSO_INT2
57	PB5	I/O	GPIO_EXTI5	LSM6DSO_INT1
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	I2C1scl
62	PB9	I/O	I2C1_SDA	I2C1sda
63	VSS	Power		
64	VDD	Power		

\* The pin is affected with an I/O function



## 5. Software Project

### 5.1. Project Settings

Name	Value
Project Name	F401RE_IKS01_Unicleo
Project Folder	D:\GitDepots\F401RE_IKS01_Unicleo
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_F4 V1.26.0
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

### 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	No
Set all free pins as analog (to optimize the power consumption)	Yes
Enable Full Assert	No

### 5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_RTC_Init	RTC
4	MX_TIM1_Init	TIM1
5	MX_MEMS_Init	STMicroelectronics.X-CUBE-MEMS1.8.2.0
6	MX_MEMS_Process	STMicroelectronics.X-CUBE-MEMS1.8.2.0

## 6. Power Consumption Calculator report

### 6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F401
MCU	STM32F401RETx
Datasheet	DS10086_Rev3

### 6.2. Parameter Selection

Temperature	25
Vdd	3.3

### 6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

#### 6.4. Sequence


<b>Step</b>	Step1	Step2
<b>Mode</b>	RUN	STOP
<b>Vdd</b>	3.3	3.3
<b>Voltage Source</b>	Battery	Battery
<b>Range</b>	Scale2-Medium	No Scale
<b>Fetch Type</b>	FLASH/ART/PREFETCH	n/a
<b>CPU Frequency</b>	84 MHz	0 Hz
<b>Clock Configuration</b>	HSE PLL	Regulator_LPLV Flash-PwrDwn
<b>Clock Source Frequency</b>	4 MHz	0 Hz
<b>Peripherals</b>		
<b>Additional Cons.</b>	0 mA	0 mA
<b>Average Current</b>	21.6 mA	10 $\mu$ A
<b>Duration</b>	0.1 ms	0.9 ms
<b>DMIPS</b>	105.0	0.0
<b>Ta Max</b>	101.44	105
<b>Category</b>	In DS Table	In DS Table

#### 6.5. Results

Sequence Time	1 ms	Average Current	2.17 mA
Battery Life	2 months, 4 days, 8 hours	Average DMIPS	105.0 DMIPS

#### 6.6. Chart



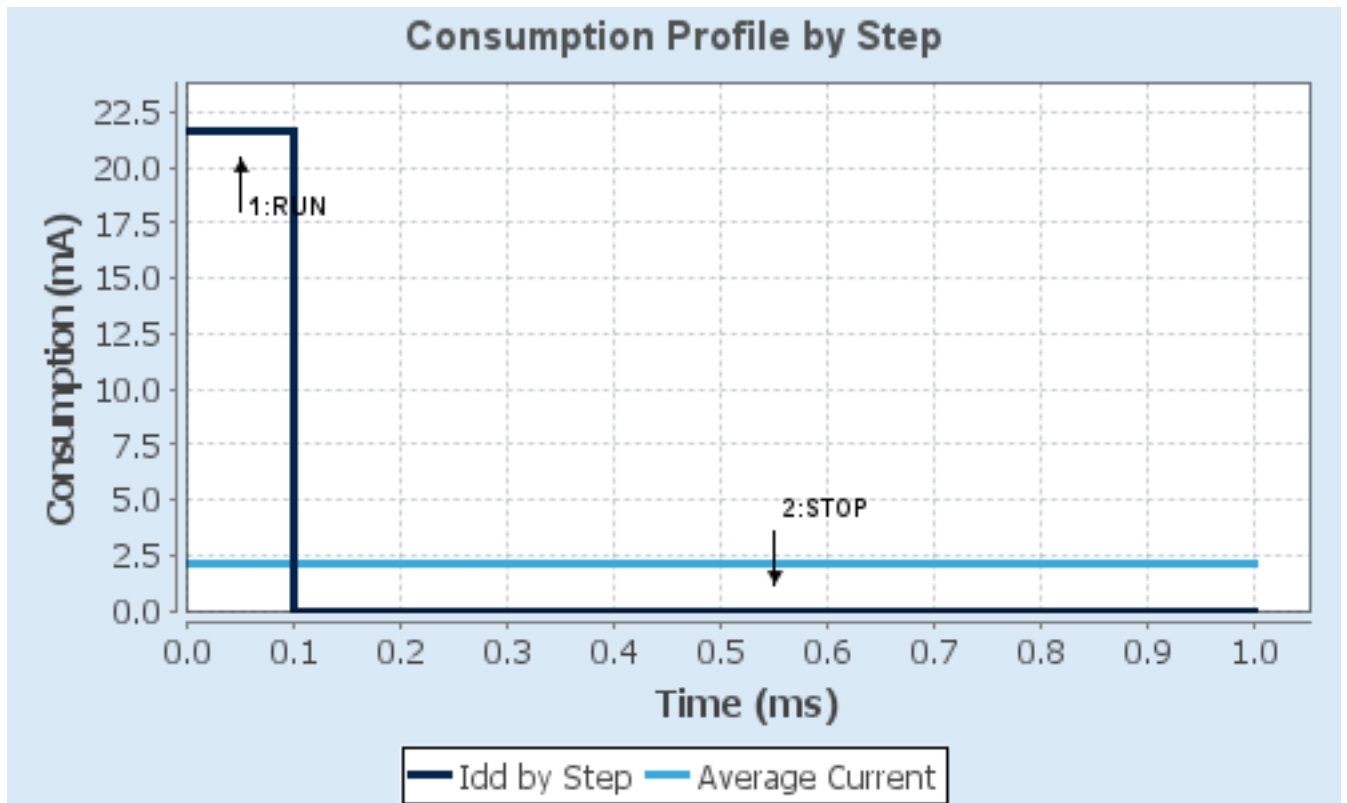

## 7. Peripherals and Middlewares Configuration

### 7.1. I2C1

#### I2C: I2C

##### 7.1.1. Parameter Settings:

###### Master Features:

I2C Speed Mode	<b>Fast Mode *</b>
I2C Clock Speed (Hz)	400000
Fast Mode Duty Cycle	Duty cycle Tlow/Thigh = 2

###### Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

### 7.2. RCC

##### 7.2.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

###### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 2
-------------------------------	---------------------------------

### 7.3. RTC

#### mode: Activate Clock Source

### 7.3.1. Parameter Settings:

#### **General:**

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

## **7.4. SYS**

**Debug: Trace Asynchronous Sw**

**Timebase Source: SysTick**

## **7.5. TIM1**

**Slave Mode: Reset Mode**

**Trigger Source: ITR0**

**Clock Source : Internal Clock**

### 7.5.1. Parameter Settings:

#### **Counter Settings:**

Prescaler (PSC - 16 bits value)	<b>4999 *</b>
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	<b>7999 *</b>
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 8 bits value)	0
auto-reload preload	<b>Enable *</b>
Slave Mode Controller	Reset Mode

#### **Trigger Output (TRGO) Parameters:**

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

## **7.6. USART2**

**Mode: Asynchronous**

### 7.6.1. Parameter Settings:

#### **Basic Parameters:**

Baud Rate	<b>921600 *</b>
-----------	-----------------

Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

**Advanced Parameters:**

Data Direction	Receive and Transmit
Over Sampling	16 Samples

## 7.7. STMicroelectronics.X-CUBE-MEMS1.8.2.0

**mode: BoardOoExtensionJjIKS01A3**

**mode: DeviceJjMEMS1liApplications**

### 7.7.1. Platform Settings:

BSP BUTTON	PC13-ANTI_TAMP
BSP USART	USART2
IKS01A3 BUS IO driver	I2C1
BSP LED	PA5

\* **User modified value**

## 8. System Configuration

### 8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	<b>Very High</b> *	I2C1scl
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	<b>Very High</b> *	I2C1sda
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	USART_RX
GPIO	PC13-ANTI_TAMP	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	<b>Pull-down</b> *	n/a	B1 [Button blue]
	PC1	GPIO_EXTI1	<b>External Interrupt Mode with Falling edge trigger detection</b>	<b>Pull-up</b> *	n/a	STTS751_INT
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]
	PB0	GPIO_EXTI0	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	LIS2DW12_INT1
	PB10	GPIO_EXTI10	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	LPS22HH_INT
	PC7	GPIO_EXTI7	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	LIS2DW12_INT2
	PA8	GPIO_Input	Input mode	<b>Pull-down</b> *	n/a	BP2 [Btn ToR]
	PB4	GPIO_EXTI4	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	LSM6DSO_INT2
	PB5	GPIO_EXTI5	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	LSM6DSO_INT1

### 8.2. DMA configuration

nothing configured in DMA service

### 8.3. NVIC configuration

#### 8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line0 interrupt	true	0	0
EXTI line1 interrupt	true	0	0
EXTI line4 interrupt	true	0	0
EXTI line[9:5] interrupts	true	0	0
TIM1 update interrupt and TIM10 global interrupt	true	0	0
USART2 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 break interrupt and TIM9 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM1 capture compare interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
FPU global interrupt	unused		

#### 8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
EXTI line0 interrupt	false	true	true
EXTI line1 interrupt	false	true	true
EXTI line4 interrupt	false	true	true
EXTI line[9:5] interrupts	false	true	true
TIM1 update interrupt and TIM10 global interrupt	false	true	true
USART2 global interrupt	false	true	true
EXTI line[15:10] interrupts	true	true	true

\* User modified value

## 9. System Views

### 9.1. Category view

#### 9.1.1. Current



## 10. Software Pack Report

### 10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	X-CUBE-MEMS1	8.2.0	Class : Board Extension Group : IKS01A3 Version : 1.5.0 Class : Device Group : Application Variant : IKS01A3_DataLogTerminal Version : 8.2.0

## 11. Docs & Resources

Type	Link
Datasheet	<a href="http://www.st.com/resource/en/datasheet/DM00102166.pdf">http://www.st.com/resource/en/datasheet/DM00102166.pdf</a>
Reference manual	<a href="http://www.st.com/resource/en/reference_manual/DM00096844.pdf">http://www.st.com/resource/en/reference_manual/DM00096844.pdf</a>
Programming manual	<a href="http://www.st.com/resource/en/programming_manual/DM00046982.pdf">http://www.st.com/resource/en/programming_manual/DM00046982.pdf</a>
Errata sheet	<a href="http://www.st.com/resource/en/errata_sheet/DM00158624.pdf">http://www.st.com/resource/en/errata_sheet/DM00158624.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00167594.pdf">http://www.st.com/resource/en/application_note/CD00167594.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00211314.pdf">http://www.st.com/resource/en/application_note/CD00211314.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00249778.pdf">http://www.st.com/resource/en/application_note/CD00249778.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00259245.pdf">http://www.st.com/resource/en/application_note/CD00259245.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264321.pdf">http://www.st.com/resource/en/application_note/CD00264321.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264342.pdf">http://www.st.com/resource/en/application_note/CD00264342.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/CD00264379.pdf">http://www.st.com/resource/en/application_note/CD00264379.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00024853.pdf">http://www.st.com/resource/en/application_note/DM00024853.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00040802.pdf">http://www.st.com/resource/en/application_note/DM00040802.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00040808.pdf">http://www.st.com/resource/en/application_note/DM00040808.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00042534.pdf">http://www.st.com/resource/en/application_note/DM00042534.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00046011.pdf">http://www.st.com/resource/en/application_note/DM00046011.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00072315.pdf">http://www.st.com/resource/en/application_note/DM00072315.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00073742.pdf">http://www.st.com/resource/en/application_note/DM00073742.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00073853.pdf">http://www.st.com/resource/en/application_note/DM00073853.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00080497.pdf">http://www.st.com/resource/en/application_note/DM00080497.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00081379.pdf">http://www.st.com/resource/en/application_note/DM00081379.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00115714.pdf">http://www.st.com/resource/en/application_note/DM00115714.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00129215.pdf">http://www.st.com/resource/en/application_note/DM00129215.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00156364.pdf">http://www.st.com/resource/en/application_note/DM00156364.pdf</a>
Application note	<a href="http://www.st.com/resource/en/application_note/DM00160482.pdf">http://www.st.com/resource/en/application_note/DM00160482.pdf</a>

Application note [http://www.st.com/resource/en/application\\_note/DM00144612.pdf](http://www.st.com/resource/en/application_note/DM00144612.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00213525.pdf](http://www.st.com/resource/en/application_note/DM00213525.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00220769.pdf](http://www.st.com/resource/en/application_note/DM00220769.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00257177.pdf](http://www.st.com/resource/en/application_note/DM00257177.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00272912.pdf](http://www.st.com/resource/en/application_note/DM00272912.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00226326.pdf](http://www.st.com/resource/en/application_note/DM00226326.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00236305.pdf](http://www.st.com/resource/en/application_note/DM00236305.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00281138.pdf](http://www.st.com/resource/en/application_note/DM00281138.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00296349.pdf](http://www.st.com/resource/en/application_note/DM00296349.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00325582.pdf](http://www.st.com/resource/en/application_note/DM00325582.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00327191.pdf](http://www.st.com/resource/en/application_note/DM00327191.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00354244.pdf](http://www.st.com/resource/en/application_note/DM00354244.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00315319.pdf](http://www.st.com/resource/en/application_note/DM00315319.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00380469.pdf](http://www.st.com/resource/en/application_note/DM00380469.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00395696.pdf](http://www.st.com/resource/en/application_note/DM00395696.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00431633.pdf](http://www.st.com/resource/en/application_note/DM00431633.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00493651.pdf](http://www.st.com/resource/en/application_note/DM00493651.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00536349.pdf](http://www.st.com/resource/en/application_note/DM00536349.pdf)

Application note [http://www.st.com/resource/en/application\\_note/DM00725181.pdf](http://www.st.com/resource/en/application_note/DM00725181.pdf)