

Digital Signal Processing

Yash Rajput
BM20BTECH11018

CONTENTS

1	Software Installation	1
2	Digital Filter	1
3	Difference Equation	2
4	Z-transform	2
5	Impulse Response	4
6	DFT and FFT	6
7	Exercises	8

Abstract—This manual provides a simple introduction to digital signal processing.

1 SOFTWARE INSTALLATION

Run the following commands

```
sudo apt-get update
sudo apt-get install libffi-dev libsndfile1 python3
  -scipy python3-numpy python3-matplotlib
sudo pip install cffi pysoundfile
```

2 DIGITAL FILTER

2.1 Download the sound file from

```
wget https://github.com/yashrajput22/EE3900
  -22/blob/master/codes/Section-2/
  Sound_Noise.wav
```

2.2 You will find a spectrogram at <https://academo.org/demos/spectrum-analyzer>. Upload the sound file that you downloaded in Problem 2.1 in the spectrogram and play. Observe the spectrogram. What do you find?

Solution: There are a lot of yellow lines between 440 Hz to 5.1 KHz. These represent the synthesizer key tones. Also, the key strokes are audible along with background noise.

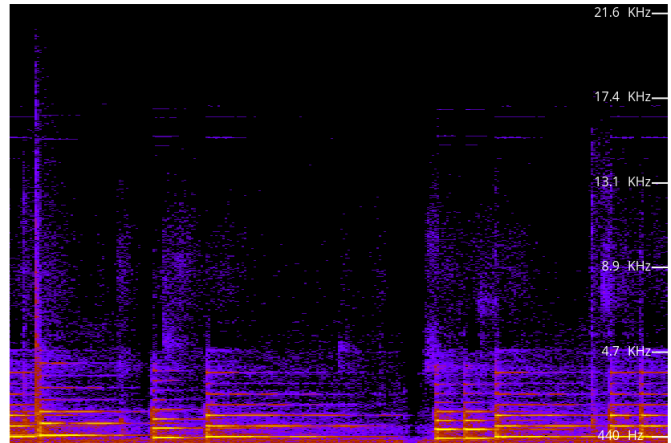


Fig. 2.2

2.3 Write the python code for removal of out of band noise and execute the code.

Solution:

```
import soundfile as sf
from scipy import signal
#read .wav file
input_signal,fs = sf.read('Sound_Noise.wav'
)
#sampling frequency of Input signal
sampl_freq=fs
#order of the filter
order=4
#cutoff frquency 4kHz
cutoff_freq=4000.0
#digital frequency
Wn=2*cutoff_freq/sampl_freq
# b and a are numerator and denominator
  polynomials respectively
b, a = signal.butter(order,Wn, 'low')
#filter the input signal with butterworth filter
output_signal = signal.filtfilt(b, a,
  input_signal)
#output signal = signal.lfilter(b, a,input
  signal)
#write the output signal into .wav file
```

```
sf.write('Sound_With_ReducedNoise.wav',
        output_signal, fs)
```

2.4 The output of the python script in Problem 2.3 is the audio file Sound_With_ReducedNoise.wav. Play the file in the spectrogram in Problem 2.2. What do you observe?

Solution: The key strokes as well as background noise is subdued in the audio. Also, the signal is blank for frequencies above 5.1 kHz.

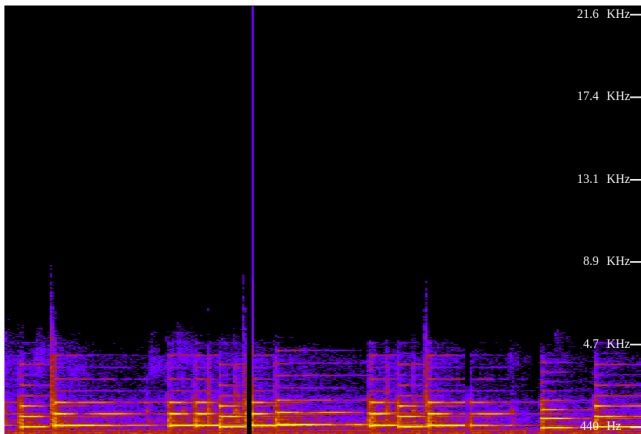


Fig. 2.4

3 DIFFERENCE EQUATION

3.1 Let

$$x(n) = \left\{ \underset{\uparrow}{1}, 2, 3, 4, 2, 1 \right\} \quad (3.1)$$

Sketch $x(n)$.

3.2 Let

$$y(n) + \frac{1}{2}y(n-1) = x(n) + x(n-2),$$

$$y(n) = 0, n < 0 \quad (3.2)$$

Sketch $y(n)$.


Solution: The following code yields Fig. 3.3.

```
wget https://github.com/yashrajput22/EE3900
-22/blob/master/codes/Section-3/3_2.py
```

3.3 Repeat the above exercise using a C code.

Solution: The following code yields Fig. 3.3.

```
wget https://github.com/yashrajput22/EE3900
-22/blob/master/codes/Section-3/3_2.c
```

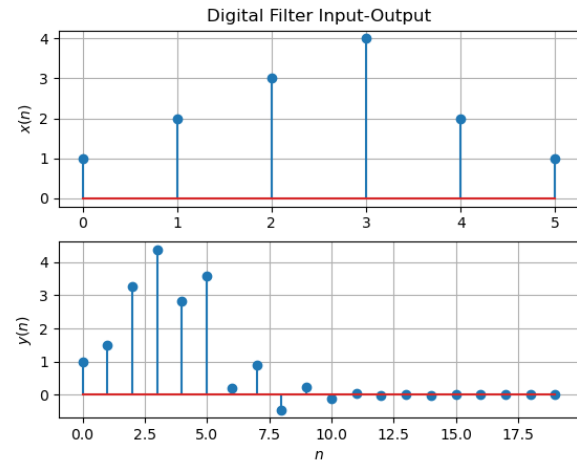

Solution: From (4.1),

$$\mathcal{Z}\{x(n-k)\} = \sum_{n=-\infty}^{\infty} x(n-1)z^{-n} \quad (4.4)$$

$$= \sum_{n=-\infty}^{\infty} x(n)z^{-n-1} = z^{-1} \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (4.5)$$

resulting in (4.2). Similarly, it can be shown that

$$\mathcal{Z}\{x(n-k)\} = z^{-k}X(z) \quad (4.6)$$

4.2 Obtain $X(z)$ for $x(n)$ defined in problem (??).

Solution:

$$Z(x(n)) = \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (4.7)$$

$$= x(0)z^0 + x(1)z^{-1} + x(2)z^{-2} + x(3)z^{-3} + \quad (4.8)$$

$$\begin{aligned} & x(4)z^{-4} + x(5)z^{-5} \\ & = 1 + 2z^{-1} + 3z^{-2} + 4z^{-3} + 2z^{-4} + z^{-5} \end{aligned} \quad (4.9)$$

4.3 Find

$$H(z) = \frac{Y(z)}{X(z)} \quad (4.10)$$

from (3.2) assuming that the Z-transform is a linear operation.

Solution: Applying (4.6) in (3.2),

$$Y(z) + \frac{1}{2}z^{-1}Y(z) = X(z) + z^{-2}X(z) \quad (4.11)$$

$$\Rightarrow \frac{Y(z)}{X(z)} = \frac{1 + z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (4.12)$$

4.4 Find the Z transform of

$$\delta(n) = \begin{cases} 1 & n = 0 \\ 0 & \text{otherwise} \end{cases} \quad (4.13)$$

and show that the Z-transform of

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (4.14)$$

is

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (4.15)$$

Solution: It is easy to show that

$$\delta(n) \stackrel{Z}{\rightleftharpoons} 1 \quad (4.16)$$

and from (4.14),

$$U(z) = \sum_{n=0}^{\infty} z^{-n} \quad (4.17)$$

$$= \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (4.18)$$

using the formula for the sum of an infinite geometric progression.

4.5 Show that

$$a^n u(n) \stackrel{Z}{\rightleftharpoons} \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (4.19)$$

Solution:

$$\mathcal{Z}\{a^n u(n)\} = \sum_{n=-\infty}^{\infty} a^n u(n)z^{-n} \quad (4.20)$$

$$= \sum_{n=-\infty}^{\infty} u(n)(az^{-1})^n \quad (4.21)$$

$$= \sum_{n=-\infty}^{\infty} (az^{-1})^n, \quad |az^{-1}| < 1 \quad (4.22)$$

$$(4.23)$$

$$= \frac{1}{1 - az^{-1}}, \quad |a| < |z| \quad (4.24)$$

using the formula for the sum of an infinite geometric progression.

4.6 Let

$$H(e^{j\omega}) = H(z = e^{j\omega}). \quad (4.25)$$

Plot $|H(e^{j\omega})|$. Comment. $H(e^{j\omega})$ is known as the *Discrete Time Fourier Transform* (DTFT) of $x(n)$.

Solution: The graph is symmetric and periodic it is attaining high of value 4 and minimum between (0 - 0.5). It is bounded between (0, 4) and periodic with period (2π) because in the below equation $\cos(\omega)$ is periodic function having period 2π

$$H(e^{j\omega}) = \frac{1 + e^{-2j\omega}}{1 + \frac{e^{-j\omega}}{2}} \quad (4.26)$$

$$\Rightarrow |H(e^{j\omega})| = \frac{|1 + e^{-2j\omega}|}{|1 + \frac{e^{-j\omega}}{2}|} \quad (4.27)$$

$$= \frac{|1 + e^{2j\omega}|}{|e^{2j\omega} + \frac{e^{j\omega}}{2}|} \quad (4.28)$$

$$= \frac{|1 + \cos 2\omega + j \sin 2\omega|}{|e^{j\omega} + \frac{1}{2}|} \quad (4.29)$$

$$= \frac{|4 \cos^2(\omega) + 4j \sin(\omega) \cos(\omega)|}{|2e^{j\omega} + 1|} \quad (4.30)$$

$$= \frac{|4 \cos(\omega)| |\cos(\omega) + j \sin(\omega)|}{|2 \cos(\omega) + 1 + 2j \sin(\omega)|} \quad (4.31)$$

$$\therefore |H(e^{j\omega})| = \frac{|4 \cos(\omega)|}{\sqrt{5 + 4 \cos(\omega)}} \quad (4.32)$$

The following code plots Fig. 4.6.

```
wget https://github.com/yashrajput22/EE3900
-22/blob/master/codes/Section-4/4_5.py
```

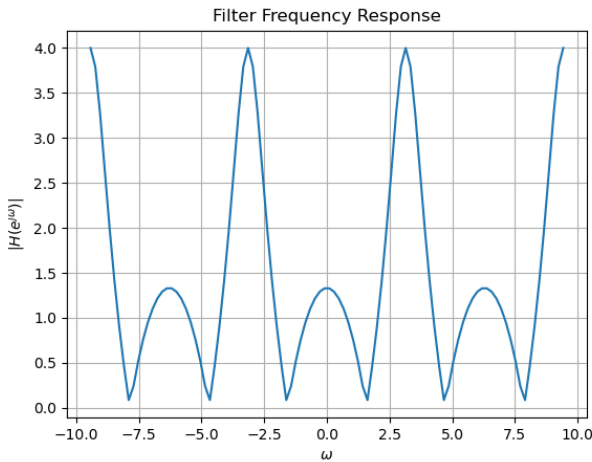


Fig. 4.6: $|H(e^{j\omega})|$

4.7 Express $x(n)$ in terms of $H(e^{j\omega})$.

Solution:

$$\int_{-\pi}^{\pi} e^{j\omega(n-k)} d\omega = \begin{cases} 2\pi & n = k \\ 0 & \text{otherwise} \end{cases} \quad (4.33)$$

$$H(e^{j\omega}) = \sum_{n=-\infty}^{\infty} h(n) e^{-j\omega n} \quad (4.34)$$

$$\int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega k} d\omega = \sum_{n=-\infty}^{\infty} h(n) \int_{-\pi}^{\pi} e^{-j\omega n} e^{j\omega k} d\omega \quad (4.35)$$

$$\int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega k} d\omega = \sum_{n=-\infty}^{\infty} h(n) 2\pi \quad (4.36)$$

$$\int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega k} d\omega = 2\pi h(n) \quad (4.37)$$

$$\frac{1}{2\pi} \int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega k} d\omega = h(n) \quad (4.38)$$

5 IMPULSE RESPONSE

5.1 Using long division, find

$$h(n), \quad n < 5 \quad (5.1)$$

for $H(z)$ in (4.12).

Solution: We substitute $x := z^{-1}$, and write

$$\begin{array}{r} \frac{2x - 4}{\frac{1}{2}x + 1) \quad x^2 \quad + 1} \\ \underline{-x^2 - 2x} \\ -2x + 1 \\ \underline{2x + 4} \\ 5 \end{array}$$

So,

$$H(z) = -4 + 2z^{-1} + \frac{5}{1 + \frac{1}{2}z^{-1}} \quad (5.2)$$

$$= -4 + 2z^{-1} + 5 \sum_{n=0}^{\infty} \left(-\frac{1}{2}\right)^n z^{-n} \quad (5.3)$$

$$= 1 - \frac{1}{2}z^{-1} + 5 \sum_{n=2}^{\infty} \left(-\frac{1}{2}\right)^n z^{-n} \quad (5.4)$$

$$= \sum_{n=0}^{\infty} \left(-\frac{1}{2}\right)^n z^{-n} + 4 \sum_{n=2}^{\infty} \left(-\frac{1}{2}\right)^n z^{-n} \quad (5.5)$$

$$= \sum_{n=-\infty}^{\infty} u(n) \left(-\frac{1}{2}\right)^n z^{-n} + \sum_{n=-\infty}^{\infty} u(n-2) \left(-\frac{1}{2}\right)^{n-2} z^{-n} \quad (5.6)$$

Therefore, from (4.1),

$$h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.7)$$

5.2 Find an expression for $h(n)$ using $H(z)$, given that

$$h(n) \stackrel{Z}{\rightleftharpoons} H(z) \quad (5.8)$$

and there is a one to one relationship between $h(n)$ and $H(z)$. $h(n)$ is known as the *impulse response* of the system defined by (3.2).

Solution: From (4.12),

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (5.9)$$

$$\Rightarrow h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.10)$$

using (4.19) and (4.6).

5.3 Sketch $h(n)$. Is it bounded? Convergent?

Solution: Yes, it is bounded between and convergent. We can clearly see in the plot it is not tending to infinite and remain finite. The following code plots Fig. 5.3.

```
wget https://github.com/yashrajput22/EE3900
-22/blob/master/codes/Section-5/5_3.py
```

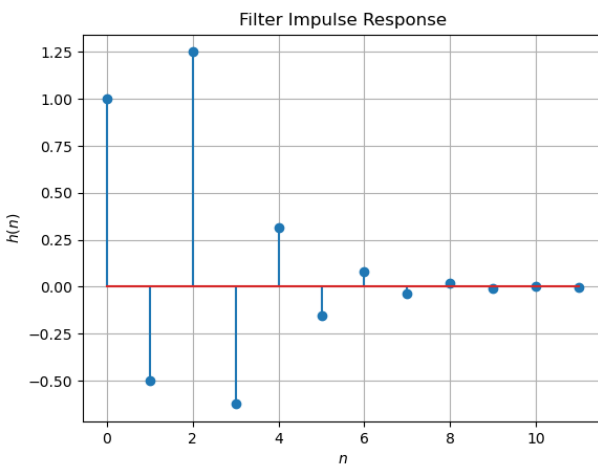


Fig. 5.3: $h(n)$ as the inverse of $H(z)$

5.4 Convergent? Justify using the ratio test.

Solution: We see that $h(n)$ is bounded. For

large n , we see that

$$h(n) = \left(-\frac{1}{2}\right)^n + \left(-\frac{1}{2}\right)^{n-2} \quad (5.11)$$

$$= \left(-\frac{1}{2}\right)^n (4 + 1) = 5 \left(-\frac{1}{2}\right)^n \quad (5.12)$$

$$\Rightarrow \left| \frac{h(n+1)}{h(n)} \right| = \frac{1}{2} \quad (5.13)$$

and therefore, $\lim_{n \rightarrow \infty} \left| \frac{h(n+1)}{h(n)} \right| = \frac{1}{2} < 1$. Hence, we see that $h(n)$ converges.

5.5 The system with $h(n)$ is defined to be stable if

$$\sum_{n=-\infty}^{\infty} h(n) < \infty \quad (5.14)$$

Is the system defined by (3.2) stable for the impulse response in (5.8)?

Solution: By using $h(n)$ from 5.3

$$h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.15)$$

$$= \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^n u(n) + \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.16)$$

$$= \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^n u(n) + \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.17)$$

$$= \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^n + \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^{n-2} \quad (5.18)$$

$$(5.19)$$

$$= \frac{2}{3} + \frac{2}{3} < \infty \quad (5.20)$$

5.6 Verify the above result using a python code.

Solution:

```
wget https://github.com/yashrajput22/EE3900
-22/blob/master/codes/Section-5/5_6.py
```

5.7 Compute and sketch $h(n)$ using

$$h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2), \quad (5.21)$$

This is the definition of $h(n)$.

Solution: The following code plots Fig. 5.7.

Note that this is the same as Fig. 5.3.

$$= h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2) \quad (5.22)$$

$$= H(z) + \frac{1}{2}z^{-1}H(z) = 1 + z^{-2} \quad (5.23)$$

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (5.24)$$

$$h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.25)$$

wget https://github.com/yashrajput22/EE3900-22/blob/master/codes/Section-5/5_7.py

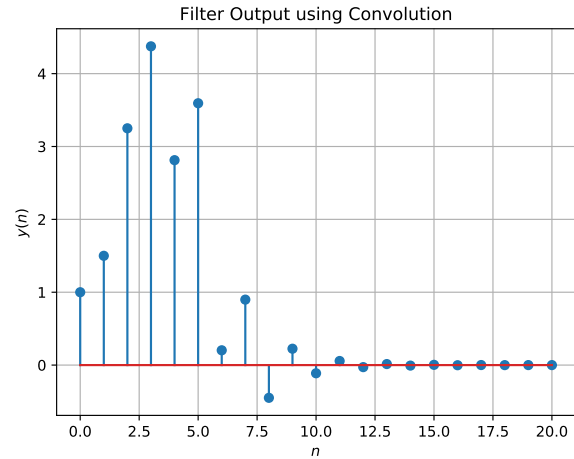


Fig. 5.8: $y(n)$ from the definition of convolution

We use Toeplitz matrices for convolution

$$\mathbf{y} = \mathbf{x} \otimes \mathbf{h} \quad (5.27)$$

$$\mathbf{y} = \begin{pmatrix} h_1 & 0 & \cdot & \cdot & \cdot & 0 \\ h_2 & h_1 & \cdot & \cdot & \cdot & 0 \\ h_3 & h_2 & h_1 & \cdot & \cdot & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ 0 & \cdot & \cdot & h_3 & h_2 & h_1 \\ 0 & \cdot & \cdot & \cdot & h_2 & h_1 \\ 0 & \cdot & \cdot & \cdot & 0 & h_1 \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{pmatrix} \quad (5.28)$$

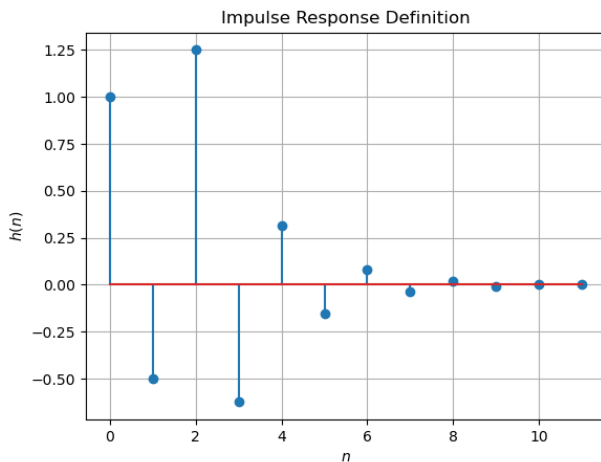


Fig. 5.7: $h(n)$ from the definition

5.8 Compute

$$y(n) = x(n) * h(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (5.26)$$

Comment. The operation in (5.26) is known as *convolution*.

Solution: The following code plots Fig. 5.8. Note that this is the same as $y(n)$ in Fig. 3.3.

wget https://github.com/yashrajput22/EE3900-22/blob/master/codes/Section-5/5_8.py

5.9 Express the above convolution using a Teoplitz matrix.

Solution:

5.10 Show that

$$y(n) = \sum_{k=-\infty}^{\infty} x(n-k)h(k) \quad (5.29)$$

Solution: From (5.26), we substitute $k := n-k$ to get

$$y(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (5.30)$$

$$= \sum_{n-k=-\infty}^{\infty} x(n-k)h(k) \quad (5.31)$$

$$= \sum_{k=-\infty}^{\infty} x(n-k)h(k) \quad (5.32)$$

6 DFT AND FFT

6.1 Compute

$$X(k) \triangleq \sum_{n=0}^{N-1} x(n)e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1 \quad (6.1)$$

and $H(k)$ using $h(n)$.

6.2 Compute

$$Y(k) = X(k)H(k) \quad (6.2)$$

6.3 Compute

$$y(n) = \frac{1}{N} \sum_{k=0}^{N-1} Y(k) \cdot e^{j2\pi kn/N}, \quad n = 0, 1, \dots, N-1 \quad (6.3)$$

Solution: The following code plots Fig. 5.8 and computes $X(k)$ and $Y(k)$. Note that this is the same as $y(n)$ in Fig. 3.3.

```
wget https://github.com/yashrajput22/EE3900-22/blob/master/codes/Section-6/6_3.py
```

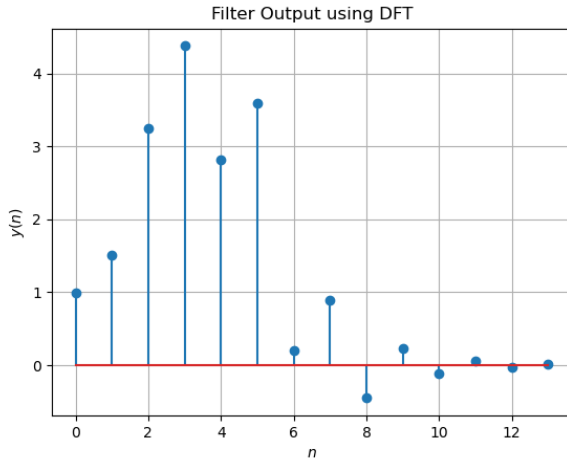


Fig. 6.3: $y(n)$ from the DFT

6.4 Repeat the previous exercise by computing $X(k)$, $H(k)$ and $y(n)$ through FFT and IFFT.

Solution: Download the code from

```
wget https://github.com/yashrajput22/EE3900-22/blob/master/codes/Section-6/6_4.py
```

6.5 Wherever possible, express all the above equations as matrix equations.

Solution: We use the DFT Matrix, where $\omega = e^{-j2\pi/N}$, which is given by

$$\mathbf{W} = \begin{pmatrix} \omega^0 & \omega^0 & \dots & \omega^0 \\ \omega^0 & \omega^1 & \dots & \omega^{N-1} \\ \vdots & \vdots & \ddots & \vdots \\ \omega^0 & \omega^{N-1} & \dots & \omega^{(N-1)(N-1)} \end{pmatrix} \quad (6.4)$$

i.e. $W_{jk} = \omega^{jk}$, $0 \leq j, k < N$. Hence, we can

write any DFT equation as

$$\mathbf{X} = \mathbf{W}\mathbf{x} = \mathbf{x}\mathbf{W} \quad (6.5)$$

where

$$\mathbf{x} = \begin{pmatrix} x(0) \\ x(1) \\ \vdots \\ x(n-1) \end{pmatrix} \quad (6.6)$$

Using (??), the inverse Fourier Transform is given by

$$\mathbf{x} = \mathcal{F}^{-1}(\mathbf{X}) = \mathbf{W}^{-1}\mathbf{X} = \frac{1}{N}\mathbf{W}^H\mathbf{X} = \frac{1}{N}\mathbf{X}\mathbf{W}^H \quad (6.7)$$

$$\Rightarrow \mathbf{W}^{-1} = \frac{1}{N}\mathbf{W}^H \quad (6.8)$$

where H denotes hermitian operator. We can rewrite (??) using the element-wise multiplication operator as

$$\mathbf{Y} = \mathbf{H} \cdot \mathbf{X} = (\mathbf{W}\mathbf{h}) \cdot (\mathbf{W}\mathbf{x}) \quad (6.9)$$

The plot of $y(n)$ using the DFT matrix in Fig. (5) is the same as $y(n)$ in Fig. (3.3). Download the code using

```
$ wget https://raw.githubusercontent.com/goats-9/ee3900-assignments/main/Assignment_01/codes/6_5.py
```

and run it using

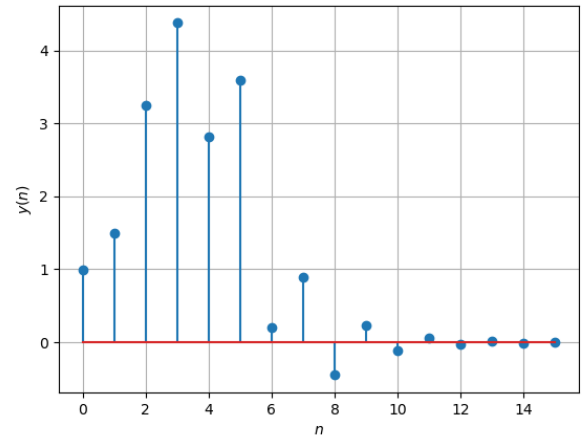


Fig. 5: $y(n)$ using the DFT matrix

7 EXERCISES

Answer the following questions by looking at the python code in Problem 2.3.

7.1 The command

```
output_signal = signal.lfilter(b, a,
                               input_signal)
```

in Problem 2.3 is executed through the following difference equation

$$\sum_{m=0}^M a(m) y(n-m) = \sum_{k=0}^N b(k) x(n-k) \quad (7.1)$$

where the input signal is $x(n)$ and the output signal is $y(n)$ with initial values all 0. Replace **signal.filtfilt** with your own routine and verify.

7.2 Repeat all the exercises in the previous sections for the above a and b .

7.3 What is the sampling frequency of the input signal?

Solution: Sampling frequency(fs)=44.1kHz.

7.4 What is type, order and cutoff-frequency of the above butterworth filter

Solution: The given butterworth filter is low pass with order=2 and cutoff-frequency=4kHz.

7.5 Modifying the code with different input parameters and to get the best possible output.