

Gravity: I2C 16x2 Arduino LCD with RGB Backlight Display SKU: DFR0464

 [Home](#) > [Sensors & Modules](#) > [LCDs, LEDs & Displays](#) > [LCD](#)

Contents [\[hide\]](#)

1

[Introduction](#)

2

[Specification](#)

3

[Board Overview](#)

4

[Tutorial](#)

4.1

[Requirements](#)

4.2

[Connection Diagram](#)

4.3

[Sample Code](#)

5

[FAQ](#)

6

[More Documents](#)



Introduction

Have you been fed up with Black/White LCD screen? Do you want to try a colorful one? DFRobot I2C 16x2 Arduino LCD with RGB Backlight Display module will bring you a new experience about screen. It comes with RGB full color backlight, which has 16 million kinds of color.

Usually, Arduino LCD display projects will run out of pin resources easily, especially with Arduino Uno. And it is also very complicated with the wire soldering and connection. This I2C 16x2 LCD Screen is using an I2C communication interface. It means it only needs 4 pins for the LCD display: VCC, GND, SDA, SCL. It will saves at least 4 digital / analog pins on Arduino. And Gravity interface make it easier to use with our Gravity: IO expansion shield.

Specification

- Operating Voltage: 3.3V ~ 5.0V
- Operating Current: <0.8mA
- Display: 16 * 2
- Communication: IIC / I2C
- Backlight: RGB adjustable backlight (16 million)
- Operating Temperature: -20 to + 70 °C
- Storage Temperature: -30 to + 80 °C
- Dimension: 87.0 * 32.0 * 13.0mm/3.42 * 1.26 * 0.51 inches

Board Overview



Num	Label	Description
1	VCC	3.3~5.0V
2	GND	GND
3	SCL	I2C-SCL
4	SDA	I2C- SDA


Tutorial

In this section, we 'll demonstrate a fade effect with different color.

Requirements

- DFRduino UNO (or similar) x 1
- Gravity IO expansion Shield x1
- Gravity: I2C LCD1602 RGB Backlight Module x1
- M-M/F-M/F-F Jumper wires
- **Software**
 - Arduino IDE, [Click to Download Arduino IDE from Arduino®](#)

Connection Diagram

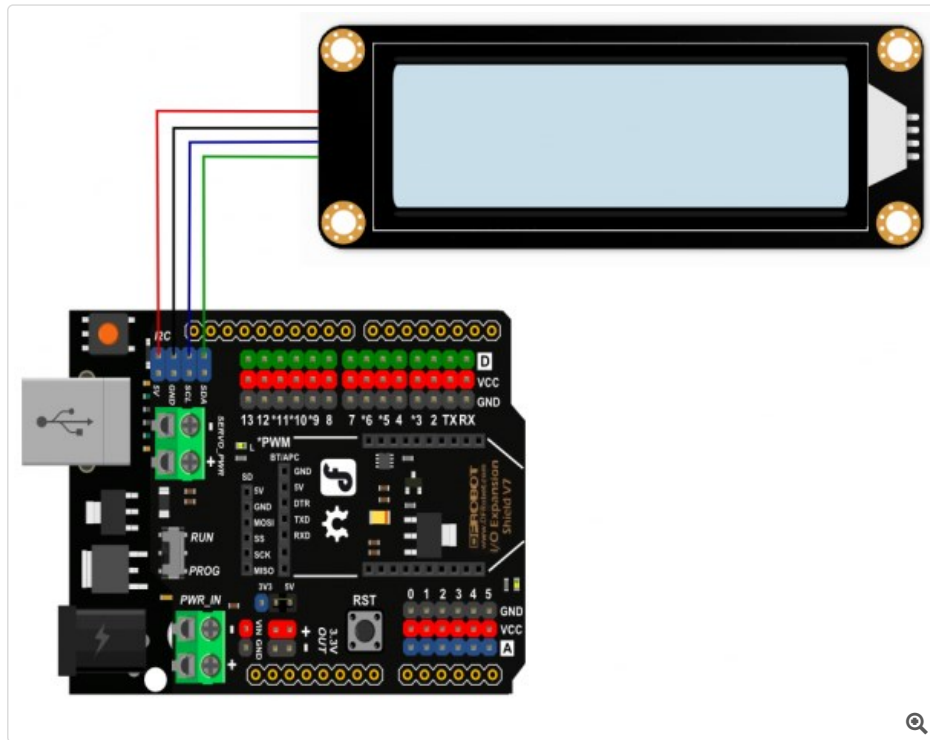

Sample Code

Please download the LCD library: [DFRobot RGB LCD](#). [How to install Libraries in Arduino IDE](#)

```

/*!
 * file SetColor.ino
 * brief SetColor.
 * @n This example Set the volume size and play music snippet.
 *
 * Copyright [DFRobot](http://www.dfrobot.com), 2016
 * Copyright GNU Lesser General Public License
 *
 * version V1.0
 * date 2017-2-10
 */

#include

#include "DFRobot_RGBLCD.h"
int r,g,b;
int t=0;

DFRobot_RGBLCD lcd(16,2); //16 characters and 2 lines of show

void setup() {
  Serial.begin(9600);
  // initialize
  lcd.init();
}

void loop() {

  r= (abs(sin(3.14*t/180)))*255; //get R,G,B value
  g= (abs(sin(3.14*(t+60)/180)))*255;
  b= (abs(sin(3.14*(t+120)/180)))*255;
  t=t+1;
}

```

```
lcd.setRGB(r, g, b); //Set R,G,B Value
lcd.setCursor(0,0);
lcd.print("DFRobot");
lcd.setCursor(0,1);
lcd.print("Gravity: RGB LCD");
//R:0-255 G:0-255 B:0-255

delay(1);
}
```

FAQ

For any questions, advice or cool ideas to share, please visit the [DFRobot Forum](#).

More Documents

- [LCD1602 RGB Backlight Module Datasheet](#)
- [Arduino Library \(Github Repository\)](#)



Shopping from [link [DFRobot Store](#)] or [DFRobot Distributor](#).

[What links here](#)[Related changes](#)[Special pages](#)[Printable version](#)[Permanent link](#)[Page information](#)

This page was last modified on 26 July 2017, at 17:02.

Content is available under [GNU Free Documentation License 1.3 or later](#) unless otherwise noted.

[Privacy policy](#) [About DFRobot Electronic Product Wiki and Tutorial: Arduino and Robot Wiki-DFRobot.com](#) [Disclaimers](#)

