Remapping Operation Steps:

Visit HID Remapper config website => https://www.remapper.org/config/.
Make sure the Twi-Hack device is connected to the system with a HID device (for demo use keyboard). Now click open device,

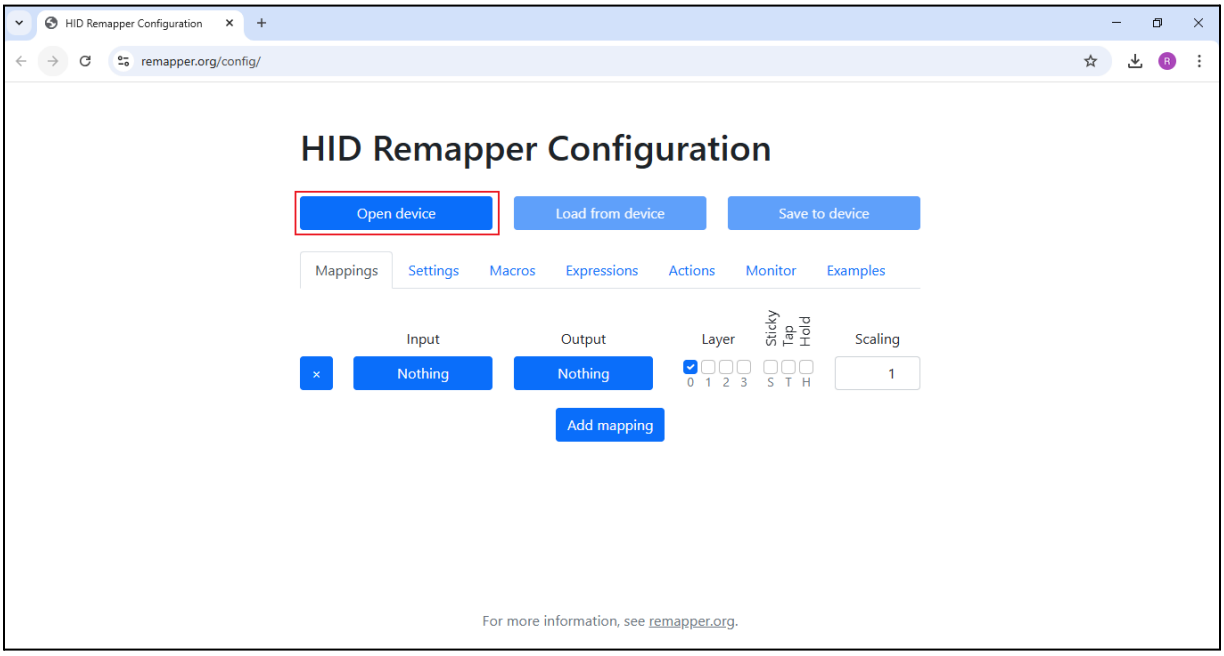

Select device listed as shown and click connect,

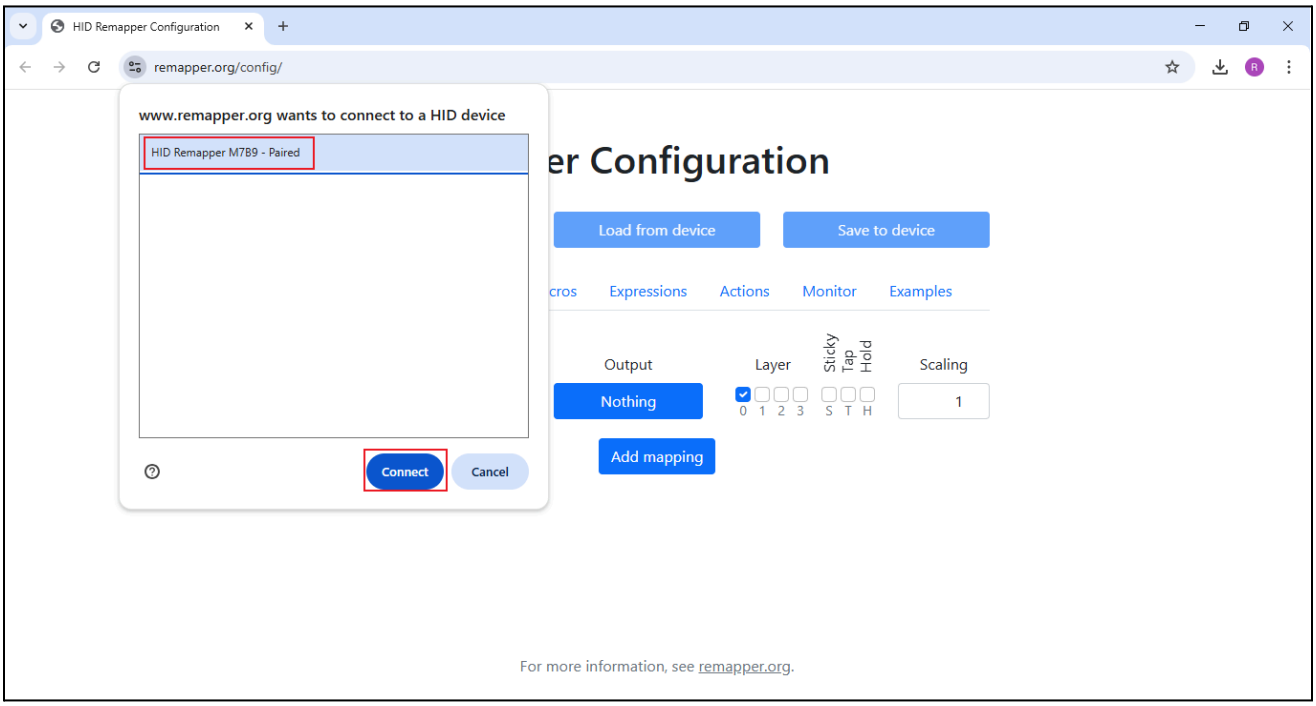

Once connected now you can decide for particular key (input) pressed what output you need, for example will map "W" as Up Arrow. Click on input side select key need to remap, then on output side.

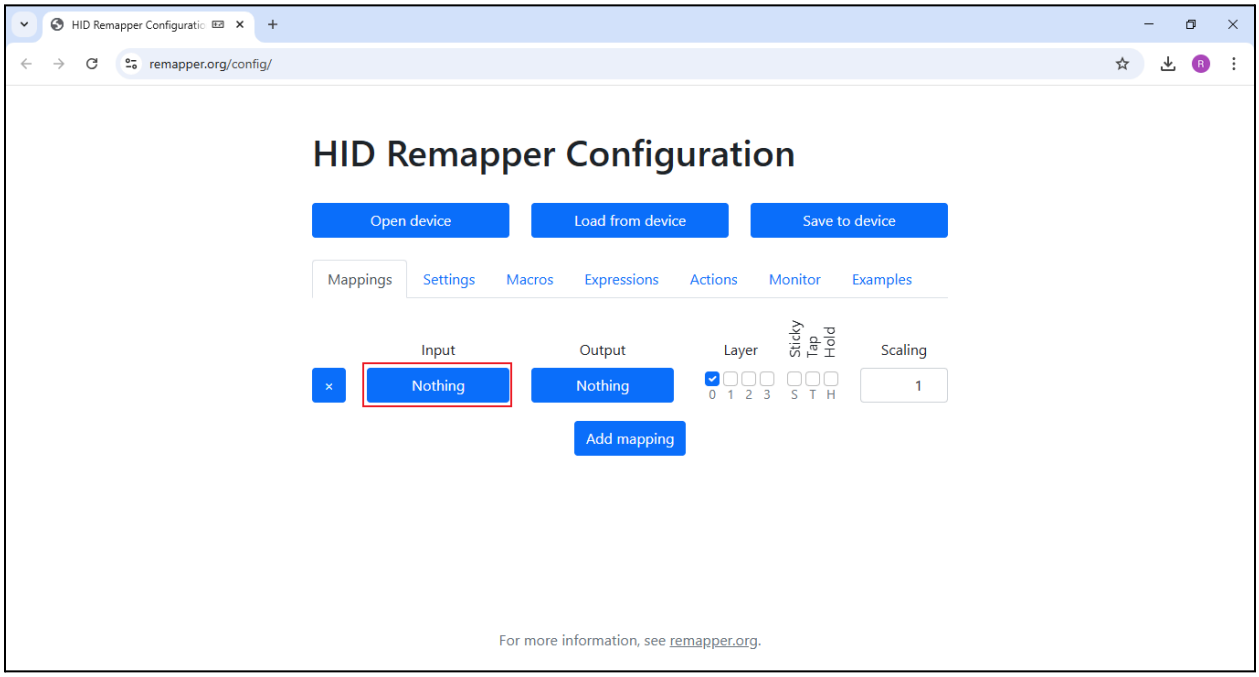

Device key at input side for which you want to Map, here we choose ‘W’

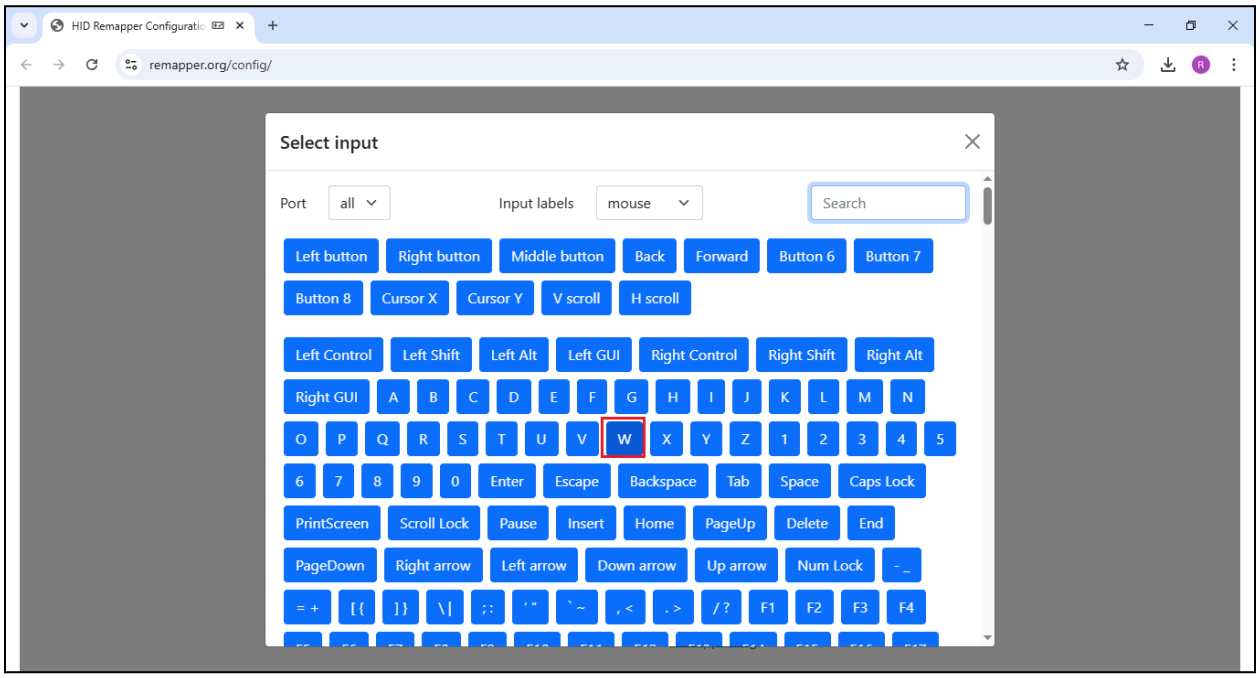

Now choose what output you need, here we opt ‘Up Arrow’.

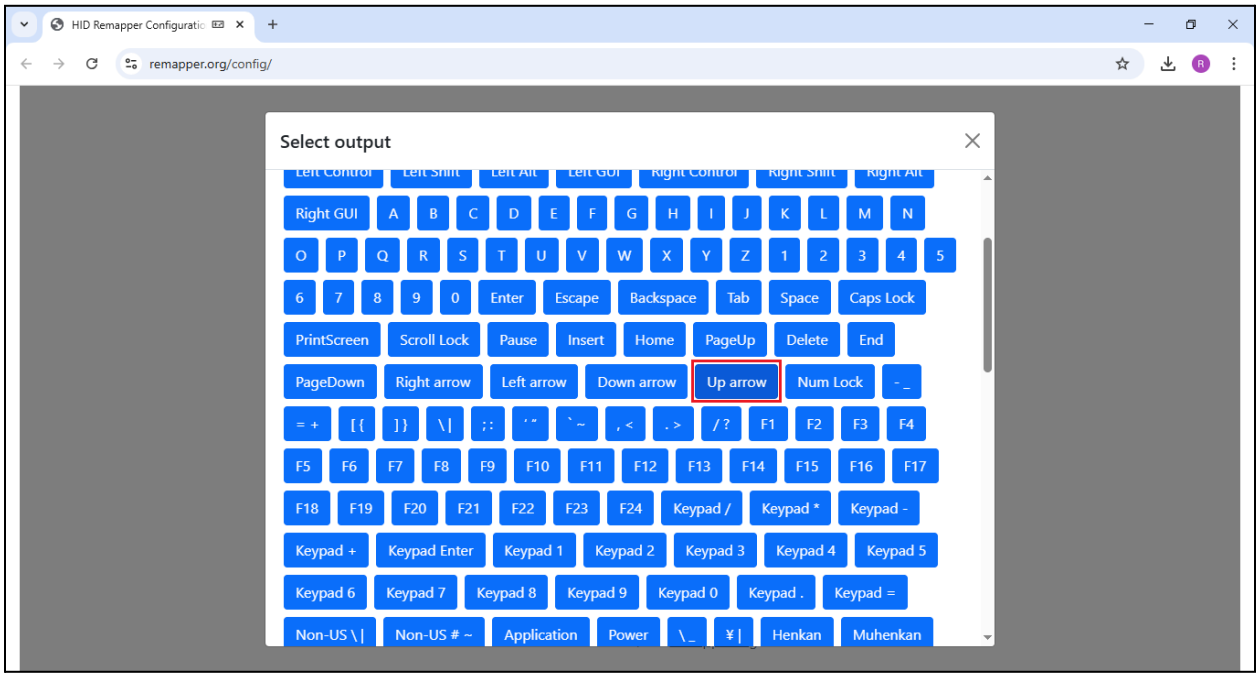

So now for ‘W’ we have output as ‘Up Arrow’

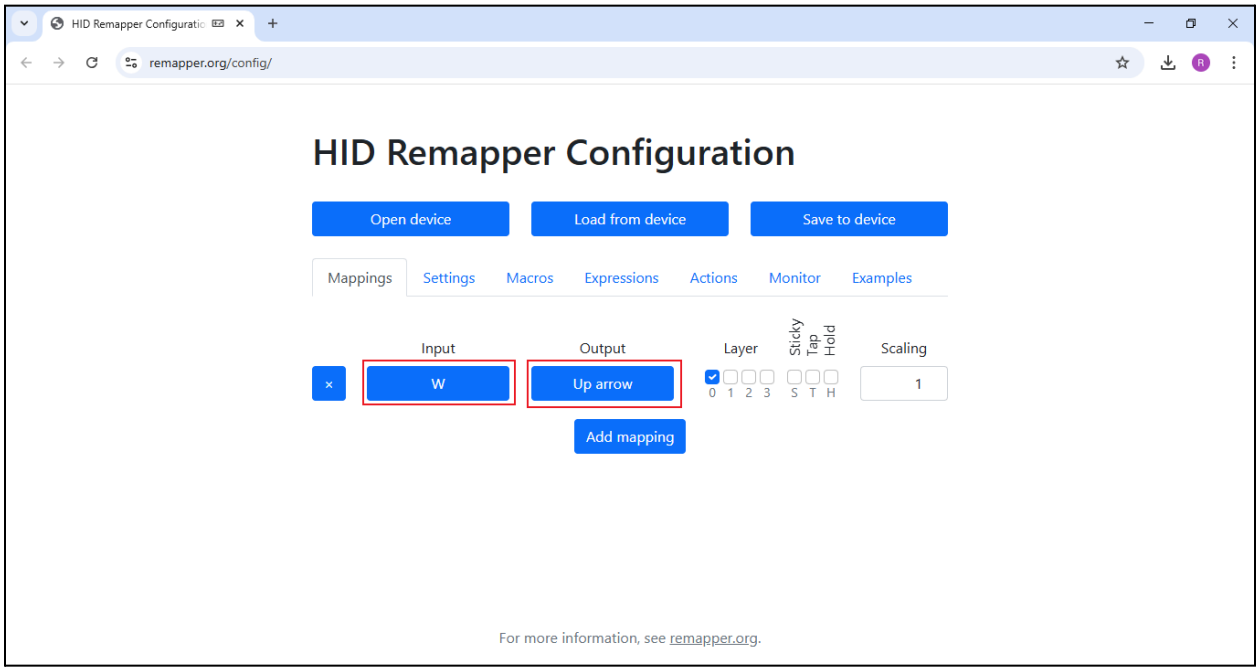

Save this configuration to device as shown,

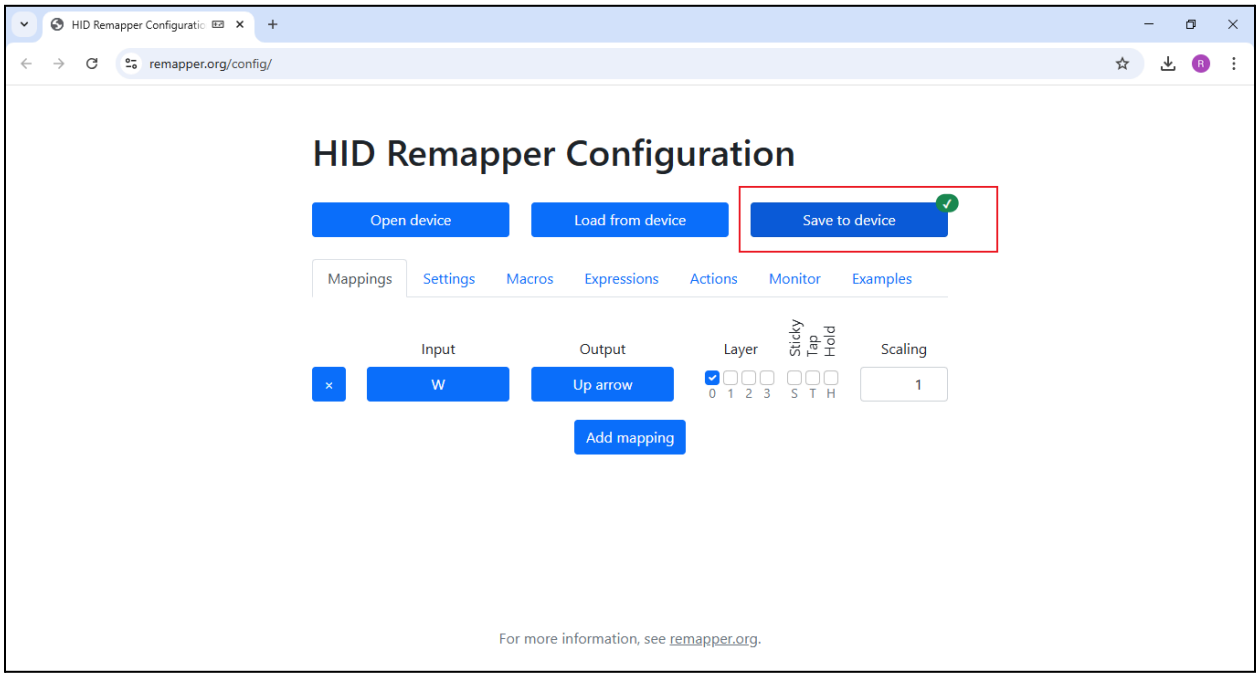

You can confirm with online key-test => https://en.key-test.ru/

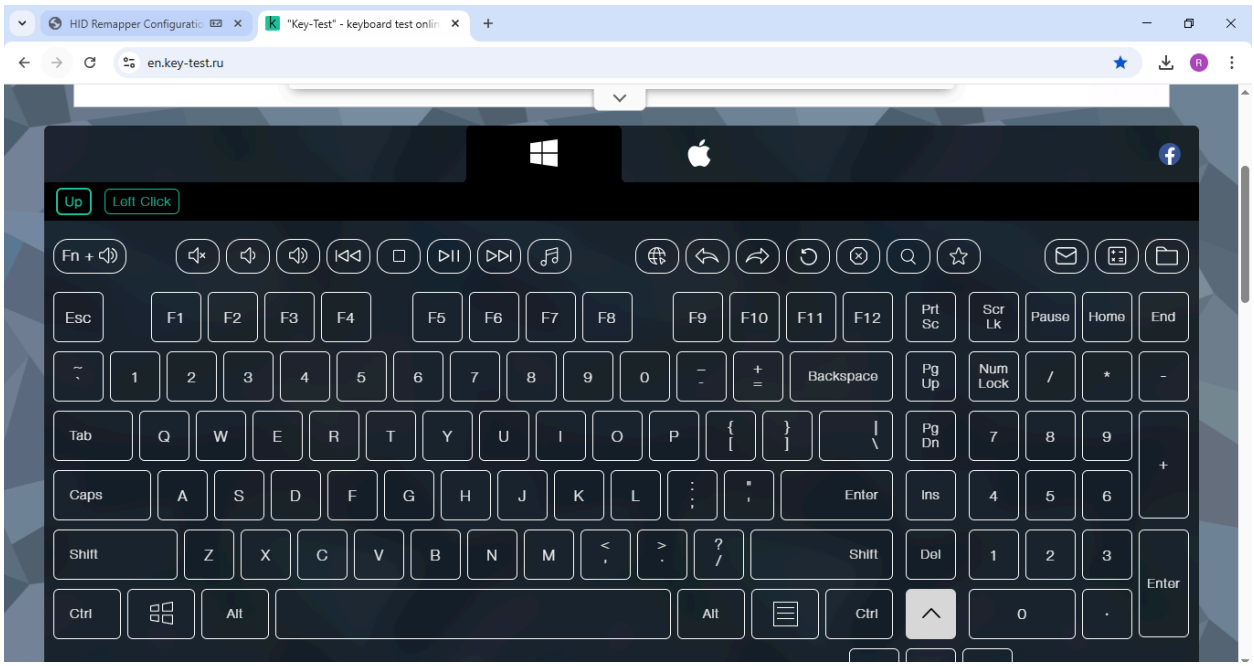

Reference:

- For more details you can checkout official HID remapper site: https://www.remapper.org/manual/
- Github also => https://github.com/jfedor2/hid-remapper