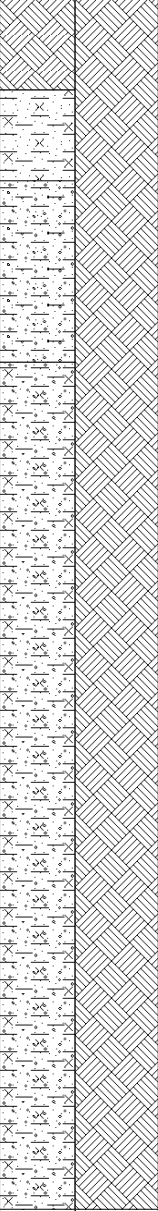
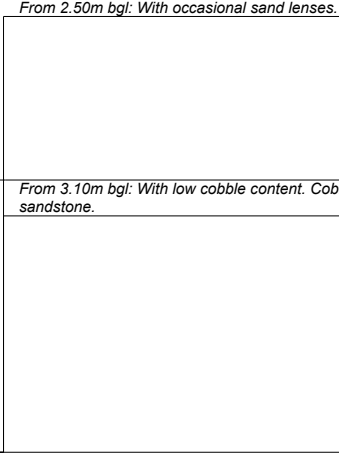






				DRAFT TRIAL PIT RECORD		TP No. TP01 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 20/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) (ppm)	Ground -water	Description	Depth (m)	Level (m AOD)	Legend	Backfill	
B	0.60 - 1.10	50.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.	0.25	14.05			
		58.0		Firm medium strength light brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.	0.50	13.80			
D	0.90	64.0		Firm medium strength dark brown mottled bluish grey slightly sandy gravelly CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz.					
B	2.00 - 2.50	58.0	2	Firm to stiff medium to high strength dark brown locally light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains and occasional sand lenses.	1.80	12.50			
		60.0							
D	2.30	68.0							
		74.0	3	From 3.00m bgl: With low cobble content. Cobbles are subangular to subrounded of sandstone.					
		80.0							
		84.0							
		70.0	4	End of trial pit at 3.80m	3.80	10.50			
		74.0							
		82.0							
Remarks and Groundwater Observations					GL (m AOD)		Fig No. TP01		
1. Trial pit complete at 3.80m bgl . 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.					14.30				
					Easting: 453019.23				
					Northing: 452335.72				



TP03

				DRAFT TRIAL PIT RECORD		TP No. TP04 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 20/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) { ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B	1.00 - 1.50	50.0 50.0 64.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	13.63		
				Firm medium strength orangish brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.		0.70	13.23		
D	1.20	60.0 60.0 82.0	2	Firm to stiff medium to high strength dark brown mottled bluish grey slightly sandy gravelly CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz.		1.90	12.03		
				Firm to stiff dark brown locally light grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains and occasional sand lenses.					
B	3.00 - 3.50		3	From 2.60m bgl: With low cobble content. Cobbles are subangular to subrounded of sandstone.		4.20	9.73		
D	3.40	76.0 78.0 86.0		From 3.00m bgl: With frequent sand lenses.					
		70.0 74.0 80.0	4	End of trial pit at 4.20m					
			5						
Remarks and Groundwater Observations						GL (m AOD) 13.93		Fig No.	
1. Trial pit complete at 4.20m bgl. 2. Remained stable. 3. Groundwater seepage at 3.80m bgl. 4. Backfilled with arisings upon completion. 5. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 453392.23		TP04	
						Northing: 452316.15			

				DRAFT TRIAL PIT RECORD		TP No. TP05 Sheet 1 of 1							
				Site: Hessay, York		Contract No: C10738							
				Client: Hessay Solar Limited		Date: 20/04/2026							
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25							
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC					
Type	Depth From - To(m)	Vane Results (kN/m2) (ppm)	Ground -water	Description	Depth (m)	Level (m AOD)	Legend	Backfill					
B	0.60 - 1.10	44.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.	0.30	13.69							
		52.0		Firm medium strength light grey locally light brown sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.	0.60	13.39							
D	0.90	60.0		Firm to stiff medium strength light bluish grey locally dark brown slightly gravelly sandy CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone, limestone, mudstone and quartz. With occasional sand lenses.	1.20	12.79							
		50.0		Firm to stiff medium to high strength dark brown locally light grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains.									
B	2.00 - 2.50	62.0		2		4.00			9.99				
		70.0											
D	2.30	70.0								3	From 2.50m bgl: With occasional sand lenses. 		
		76.0											
		80.0										4	End of trial pit at 4.00m
		68.0	5										
		78.0											
		84.0						End of trial pit at 4.00m					
		74.0		End of trial pit at 4.00m									
		80.0											
		80.0			End of trial pit at 4.00m								
Remarks and Groundwater Observations 1. Trial pit complete at 4.00m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						GL (m AOD) 13.99			Fig No. TP05				
						Easting: 453475.40							
						Northing: 452232.93							

				DRAFT TRIAL PIT RECORD		TP No. TP06 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 21/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B	0.80 - 1.30	52.0 60.0 60.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone and quartz. With many rootlets.		0.30	13.92		
				Firm medium strength orangish brown locally bluish grey sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.		0.60	13.62		
D	1.00	62.0 70.0 74.0	2	Firm medium strength dark brown mottled bluish grey slightly sandy gravelly CLAY with low cobble content. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz. Cobbles are subangular to subrounded of sandstone.		1.40	12.82		
				Firm to stiff medium to high strength dark brown locally bluish grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains.					
		70.0 80.0 82.0	3	From 2.00m bgl: With low cobble content. Cobbles are subangular to subrounded of sandstone.					
				From 2.60m bgl: With occasional sand lenses.					
		74.0 78.0 80.0	4	At 2.90m bgl: 1 No. subangular sandstone boulder - 0.6 x 0.3 x 0.2m.					
				End of trial pit at 4.00m		4.00	10.22		
Remarks and Groundwater Observations						GL (m AOD) 14.22		Fig No.	
1. Trial pit complete at 4.00m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 453684.59		TP06	
						Northing: 452038.72			

DRAFT TRIAL PIT RECORD

TP No.

TP07

Sheet 1 of 1

Site: Hessay, York

Contract No: C10738

Client: Hessay Solar Limited

Date:	21/04/2026
-------	------------

Method: 13 Tonne Tracked Excavator with 900mm toothed bucket

Scale: 1:25

SAMPLE DETAILS

STRATA RECORD

Logged By: JC

JC

Checked By: AEC

JC

Type	Depth From - To(m)	Vane Results (kN/m2) {(ppm)}	Ground -water	Description	Depth (m)	Level (m AOD)	Legend	Backfill
B D	0.60 - 1.10 0.70	48.0 52.0 58.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.	0.30	14.00		
				Firm medium strength orangish brown mottled light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. With rare rootlets.	0.50	13.80		
				Firm to stiff medium to high strength dark brown mottled bluish grey slightly sandy gravelly CLAY with low cobble content. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz. Cobbles are subangular to subrounded of sandstone.				
				<i>At 1.20m bgl: 1 No. land drain encountered.</i>				
B D	2.50 - 3.00 2.80	70.0 70.0 84.0 74.0 80.0 82.0	2 3	Firm to stiff medium to high strength dark brown locally light grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains.	2.00	12.30		
				<i>From 2.20m bgl: With low cobble content. Cobbles are subangular to subrounded of sandstone.</i>				
				<i>From 2.50m bgl: With low boulder content. Boulders are subangular of sandstone up to 0.4 x 0.4 x 0.3m in size.</i>				
				<i>From 3.20m bgl: With occasional sand lenses.</i>				
			4	End of trial pit at 4.10m	4.10	10.20		
			5					

Remarks and Groundwater Observations				
--------------------------------------	--	--	--	--

1. Trial pit complete at 4.10m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.

[illegible]



14.31


14.51
Easting:
453473.81


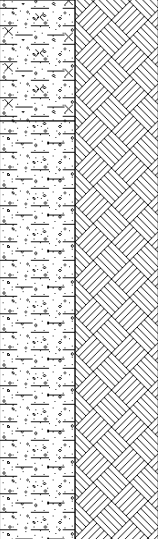


Northing:
451960.11

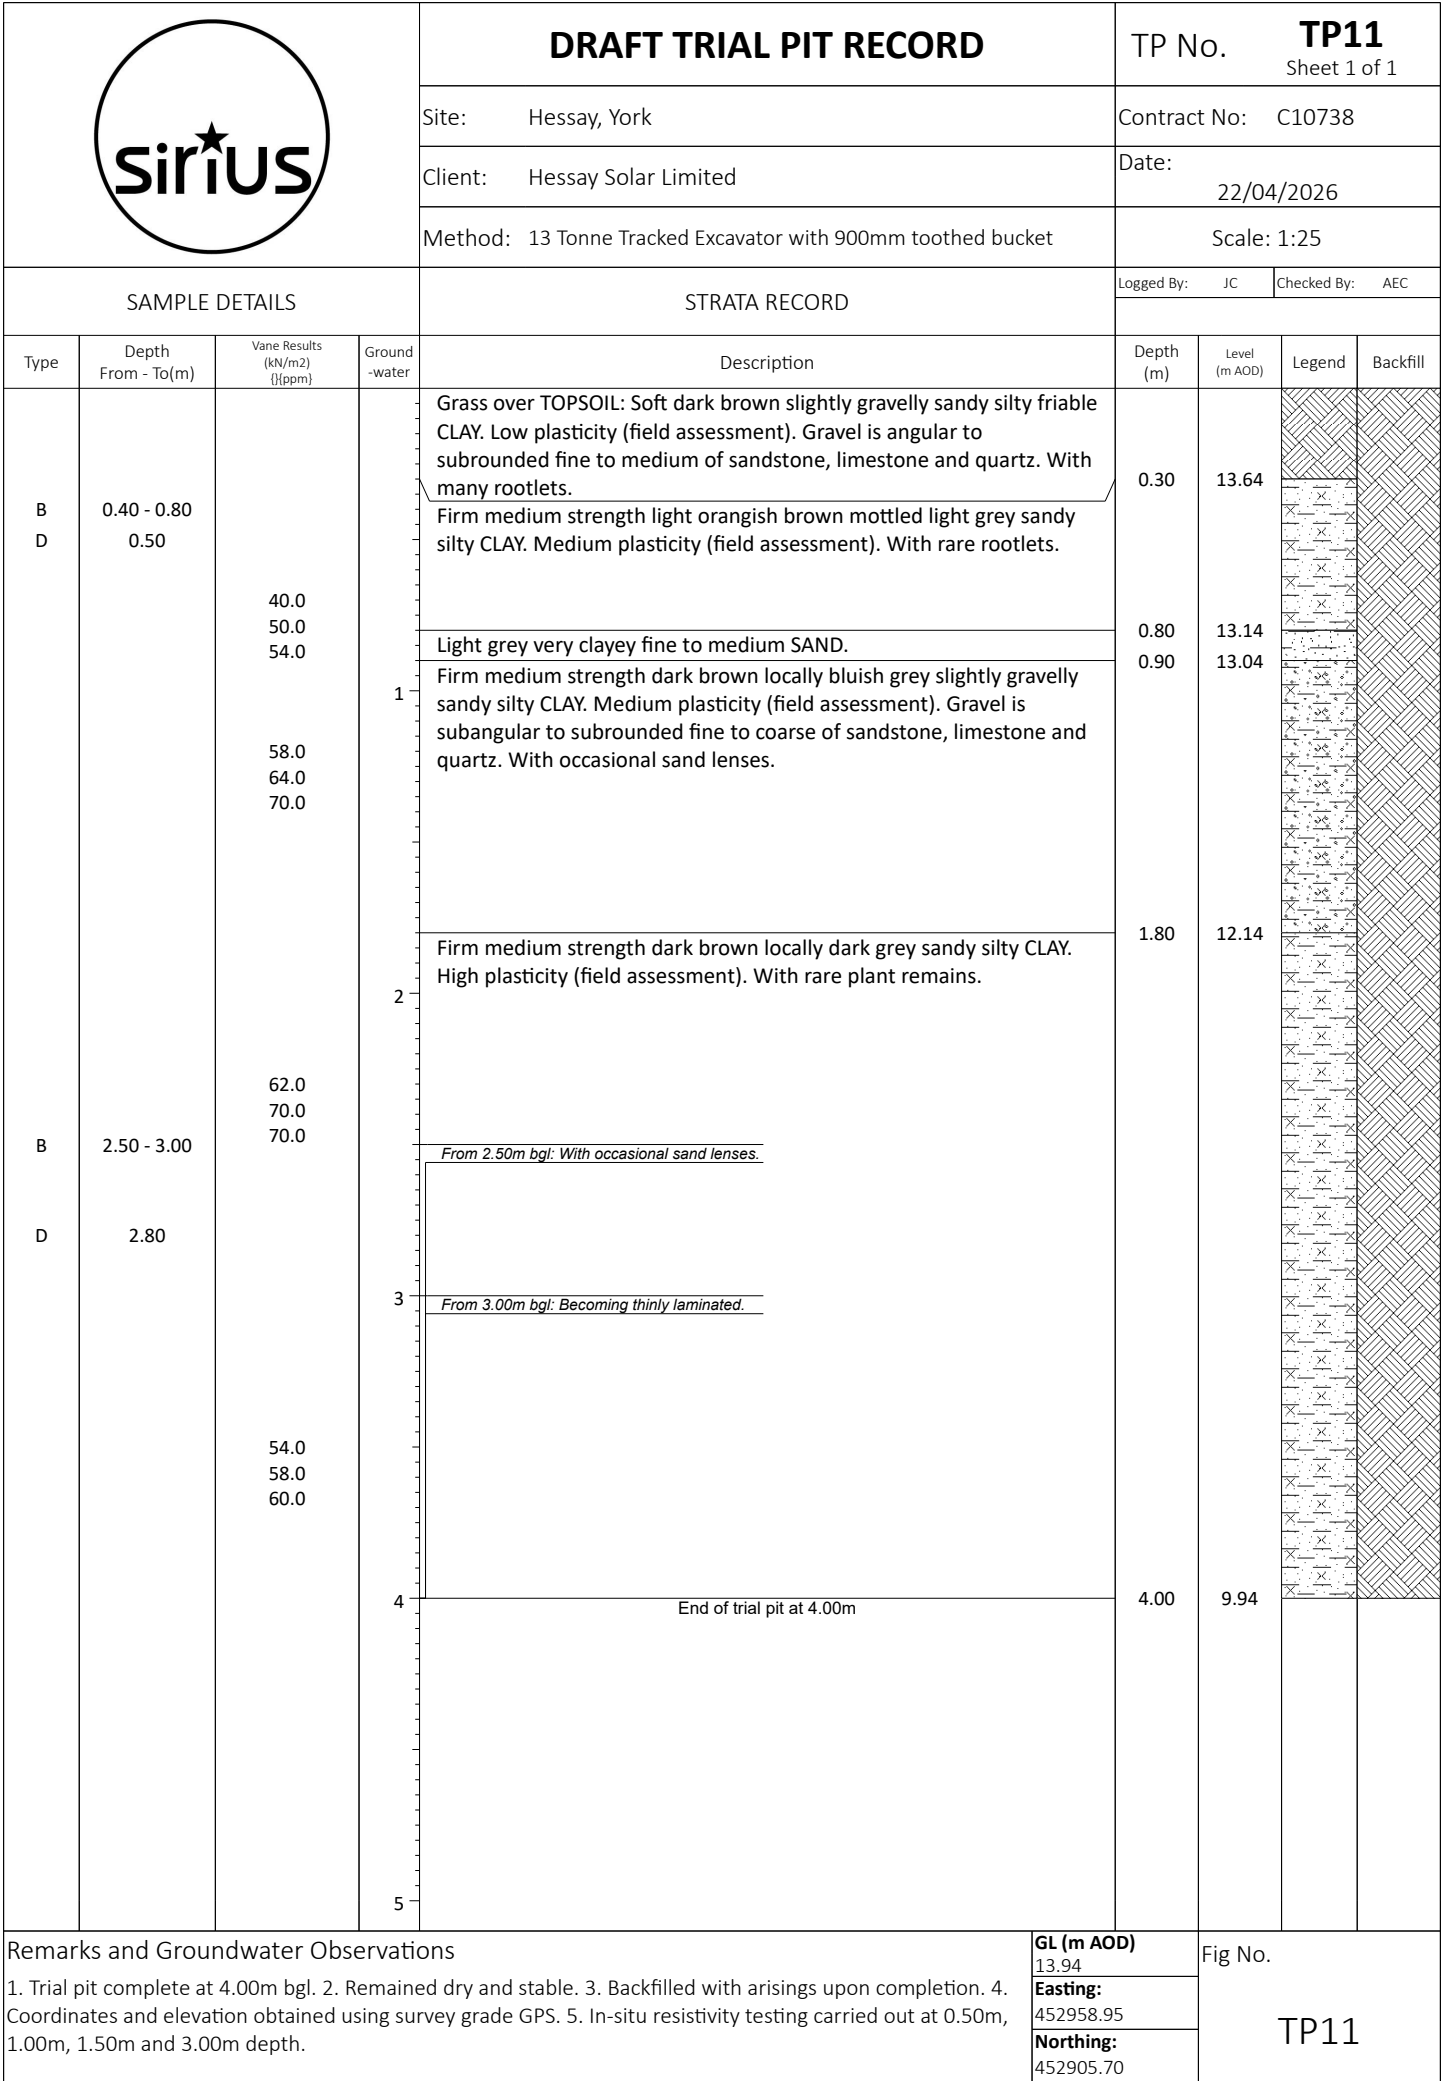
Fig No.

TP07











				DRAFT TRIAL PIT RECORD		TP No. TP08 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 21/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B D	0.50 - 1.00 0.60	52.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	14.01		
		60.0		Firm medium strength orangish brown mottled light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. With rare rootlets.		0.50	13.81		
		60.0		Firm to stiff medium to high strength dark brown mottled bluish grey slightly sandy gravelly CLAY with low cobble content. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz. Cobbles are subangular to subrounded of sandstone.					
B D	3.00 - 3.50 3.20	62.0	2	Firm to stiff medium to high strength dark brown locally light grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains.		1.70	12.61		
		70.0		From 2.00m bgl: With low cobble content. Cobbles are subangular to subrounded of sandstone.					
		80.0		From 2.40m bgl: With occasional sand lenses.					
B D	3.00 - 3.50 3.20	82.0	3						
		84.0							
B D	3.00 - 3.50 3.20	70.0	4						
		74.0							
		86.0							
B D	3.00 - 3.50 3.20	70.0	5						
		80.0							
		80.0							
End of trial pit at 4.10m						4.10	10.21		
Remarks and Groundwater Observations						GL (m AOD) 14.31		Fig No.	
1. Trial pit complete at 4.10m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 453536.60		TP08	
						Northing: 451859.01			


				DRAFT TRIAL PIT RECORD		TP No. TP09 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 21/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) { ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
ES	0.10			Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	13.98		
ES	0.50	56.0 62.0 70.0		Firm medium strength orangish brown mottled light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. With rare rootlets.		0.60	13.68		
		76.0 84.0 88.0	1	Firm to stiff high strength dark brown mottled bluish grey slightly sandy gravelly CLAY with low cobble content. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz. Cobbles are subangular to subrounded of sandstone. <u>At 0.90m bgl: 1 No. land drain encountered.</u>					
		80.0 80.0 84.0							
			2	Firm to stiff high strength dark brown locally light grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains. <u>From 2.50m bgl: With occasional sand lenses.</u>		2.00	12.28		
		78.0 80.0 90.0							
			3	End of trial pit at 3.00m		3.00	11.28		
			4						
			5						
Remarks and Groundwater Observations						GL (m AOD) 14.28		Fig No. TP09	
1. Trial pit complete at 3.00m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS.						Easting: 453504.16			
						Northing: 451832.55			



				DRAFT TRIAL PIT RECORD		TP No. TP10 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 21/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) (ppm)	Ground -water	Description	Depth (m)	Level (m AOD)	Legend	Backfill	
ES	0.20	54.0 60.0 70.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.	0.30	13.85			
ES	0.40			Firm medium strength orangish brown mottled light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. With rare rootlets.	0.70	13.45			
				Firm to stiff medium to high strength dark brown mottled bluish grey slightly sandy gravelly CLAY with low cobble content. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone, mudstone and quartz. Cobbles are subangular to subrounded of sandstone. <u>At 0.90m bgl: 1 No. land drain encountered.</u>					
		52.0 64.0 76.0	2						
		74.0 80.0 82.0		Firm to stiff medium to high strength dark brown locally light grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare plant remains and occasional sand lenses.	2.10	12.05			
			3	End of trial pit at 3.00m	3.00	11.15			
			4						
			5						
Remarks and Groundwater Observations 1. Trial pit complete at 3.00m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS.					GL (m AOD)		Fig No. TP10		
					14.15				
					Easting:				
					453640.73				
					Northing:				
					451934.55				









				DRAFT TRIAL PIT RECORD		TP No. TP12 Sheet 1 of 1				
				Site: Hessay, York		Contract No: C10738				
				Client: Hessay Solar Limited		Date: 22/04/2026				
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25				
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC		
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill	
B D	0.80 - 1.30 0.90			Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone and quartz. With many rootlets.		0.30	13.51			
		38.0		Firm medium strength light orangish brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.		0.60	13.21			
		46.0		Light grey very clayey fine to medium SAND.		0.70	13.11			
		50.0		Firm medium strength dark brown locally orangish brown mottled bluish grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With frequent sand lenses.						
B D	3.00 - 3.50 3.30		1							
		48.0								
		56.0								
		60.0								
B D	3.00 - 3.50 3.30		2			2.10	11.71			
		56.0		Firm medium strength dark brown locally dark grey sandy silty CLAY. High plasticity (field assessment). With rare plant remains.						
		58.0								
		60.0								
B D	3.00 - 3.50 3.30		3	From 3.00m bgl: With occasional sand lenses. From 3.20m bgl: Becoming thinly laminated.						
		46.0								
		52.0								
		62.0								
B D	3.00 - 3.50 3.30		4							
		42.0								
		44.0								
		58.0								
B D	3.00 - 3.50 3.30		5			4.20	9.61			
		46.0		End of trial pit at 4.20m						
		46.0								
		50.0								
Remarks and Groundwater Observations						GL (m AOD) 13.81		Fig No.		
1. Trial pit complete at 4.20m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 452987.33		TP12		
						Northing: 452724.44				

				DRAFT TRIAL PIT RECORD		TP No. TP13 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 22/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) { ppm}	Ground -water	Description	Depth (m)	Level (m AOD)	Legend	Backfill	
B	0.40 - 0.90			Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone and quartz. With many rootlets.	0.30	13.73			
	D	0.60		Firm medium strength light orangish brown locally dark grey sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.					
		50.0							
		54.0							
		60.0							
			1	Firm medium strength dark brown locally orangish brown mottled bluish grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With occasional sand lenses.	0.90	13.13			
		50.0		<u>At 0.90m bgl: 1 No. land drain encountered.</u>					
		54.0		<u>From 1.40m bgl: With frequent sand lenses.</u>					
		62.0							
			2						
		50.0							
		52.0							
		58.0							
B	2.60 - 3.10			Firm medium strength dark brown locally dark grey sandy silty CLAY. High plasticity (field assessment). With rare plant remains.	2.10	11.93			
		58.0							
		64.0							
		70.0							
D	3.00		3	<u>From 3.00m bgl: With occasional sand lenses.</u>					
		54.0							
		60.0		<u>From 3.50m bgl: Becoming thinly laminated.</u>					
		60.0							
			4	<u>From 3.80m bgl: Becoming slightly gravelly. Gravel is subangular to rounded fine to coarse of sandstone, limestone, mudstone and quartz.</u>					
		48.0							
		52.0							
		60.0							
				End of trial pit at 4.10m	4.10	9.93			
			5						
Remarks and Groundwater Observations					GL (m AOD) 14.03		Fig No. TP13		
1. Trial pit complete at 4.10m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.					Easting: 453050.65				
					Northing: 452526.23				








				DRAFT TRIAL PIT RECORD		TP No. TP15 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 22/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B D	0.80 - 1.30 0.90	40.0 46.0 54.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	13.66		
				Firm medium strength light orangish brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With occasional rootlets.		0.60	13.36		
				Light grey very clayey fine to medium SAND.		0.70	13.26		
				Firm medium strength dark brown locally bluish grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz.					
B D	3.50 - 4.00 3.60	58.0 64.0 70.0	2	From 1.50m bgl: With occasional sand lenses.					
B D	3.50 - 4.00 3.60	58.0 64.0 70.0	3	Firm medium strength dark brown locally dark grey sandy silty CLAY. High plasticity (field assessment). With rare plant remains.		2.40	11.56		
				From 3.00m bgl: Becoming thinly laminated.					
B D	3.50 - 4.00 3.60	58.0 64.0 70.0	4	End of trial pit at 4.00m		4.00	9.96		
Remarks and Groundwater Observations						GL (m AOD) 13.96		Fig No. TP15	
1. Trial pit complete at 4.00m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 453151.99			
						Northing: 452736.47			

				DRAFT TRIAL PIT RECORD		TP No. TP16 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 23/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) (ppm)	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B	1.00 - 1.50	44.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone and quartz. With many rootlets.		0.30	13.65		
		50.0		Firm medium strength light orangish brown mottled light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With rare rootlets.		0.60	13.35		
		52.0		Firm medium strength greyish brown locally orangish brown slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With occasional sand lenses and rare rootlets.					
D	1.20	42.0							
		54.0							
		60.0							
			2						
		50.0							
		52.0							
		60.0							
			3	Firm medium strength dark brown locally dark grey sandy silty CLAY. High plasticity (field assessment). With rare plant remains.		2.10	11.85		
B	3.10 - 3.60	58.0							
D	3.20	60.0							
		64.0							
			4	From 3.00m bgl: Becoming slightly gravelly. Gravel is subangular to rounded fine to coarse of sandstone, limestone, mudstone and quartz.					
				From 3.40m bgl: Becoming thinly laminated.					
		54.0							
		60.0							
		62.0							
			5	End of trial pit at 4.20m		4.20	9.75		
Remarks and Groundwater Observations						GL (m AOD) 13.95		Fig No.	
1. Trial pit complete at 4.20m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 453177.70		TP16	
						Northing: 452870.10			

				DRAFT TRIAL PIT RECORD		TP No. TP17 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 23/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B	0.60 - 1.10	50.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	13.64		
		50.0 54.0		Firm medium strength light orangish brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With rare rootlets.		0.60	13.34		
D	0.90	50.0 56.0 60.0		Firm medium strength greyish brown locally orangish brown slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With occasional sand lenses and rare rootlets.					
				<u>From 1.50m bgl: With frequent sand lenses.</u>					
				Firm medium strength dark brown locally dark grey sandy silty CLAY. High plasticity (field assessment). With rare plant remains.		1.80	12.14		
B	2.30 - 2.80	58.0 64.0 70.0	2						
D	2.50			<u>From 2.50m bgl: With occasional sand lenses.</u>					
				<u>From 3.00m bgl: Becoming thinly laminated.</u>					
		60.0 70.0 74.0	3	<u>From 3.20m bgl: Becoming slightly gravelly. Gravel is subangular to rounded fine to coarse of sandstone, limestone, mudstone and quartz.</u>					
		54.0 60.0 60.0							
			4						
		58.0 60.0 64.0		End of trial pit at 4.10m		4.10	9.84		
			5						
Remarks and Groundwater Observations 1. Trial pit complete at 4.10m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS.5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						GL (m AOD) 13.94		Fig No. TP17	
						Easting: 453269.82			
						Northing: 452514.15			

				DRAFT TRIAL PIT RECORD		TP No. TP18 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 23/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B	0.40 - 0.80			Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	13.62		
D	0.70	48.0 52.0 56.0		Firm medium strength light orangish brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With occasional rootlets.					
			1	Firm medium strength dark brown locally bluish grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With occasional sand lenses.		0.80	13.12		
		54.0 58.0 60.0							
			2	Firm medium strength dark brown locally dark grey sandy silty CLAY. High plasticity (field assessment). With rare plant remains.		1.90	12.02		
		58.0 64.0 70.0							
			3	Firm to stiff medium to high strength dark brown locally dark grey slightly gravelly sandy silty CLAY with low cobble content. High plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone, limestone and quartz. Cobbles are subrounded of sandstone.		3.00	10.92		
B	3.50 - 4.00	76.0 80.0 84.0							
D	3.80								
			4	End of trial pit at 4.00m		4.00	9.92		
			5						
Remarks and Groundwater Observations 1. Trial pit complete at 4.00m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						GL (m AOD) 13.92		Fig No. TP18	
						Easting: 453401.88			
						Northing: 452529.09			



				DRAFT TRIAL PIT RECORD		TP No. TP20 Sheet 1 of 1			
				Site: Hessay, York		Contract No: C10738			
				Client: Hessay Solar Limited		Date: 23/04/2026			
				Method: 13 Tonne Tracked Excavator with 900mm toothed bucket		Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: JC		Checked By: AEC	
Type	Depth From - To(m)	Vane Results (kN/m2) {ppm}	Ground -water	Description		Depth (m)	Level (m AOD)	Legend	Backfill
B D	0.70 - 1.20 0.80	44.0	1	Grass over TOPSOIL: Soft dark brown slightly gravelly sandy silty friable CLAY. Low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone, quartz and rare brick. With many rootlets.		0.30	13.75		
		46.0		Firm medium strength light orangish brown mottled light grey sandy silty CLAY. Medium plasticity (field assessment). With occasional rootlets.		0.60	13.45		
		52.0		Firm medium strength greyish brown locally light grey slightly gravelly sandy silty CLAY. Medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, limestone and quartz. With occasional sand lenses and rare rootlets.					
B D	2.40 - 2.90 2.60	48.0	2						
		50.0		Firm medium strength dark brown locally dark grey slightly gravelly sandy silty CLAY. High plasticity (field assessment). Gravel is subangular to rounded fine to coarse of sandstone, quartz and mudstone. With rare plant remains.		1.90	12.15		
		56.0							
B D	2.40 - 2.90 2.60	60.0	3						
		68.0							
		74.0							
B D	2.40 - 2.90 2.60	52.0	4						
		58.0							
		62.0							
B D	2.40 - 2.90 2.60	58.0	5						
		64.0							
		70.0							
End of trial pit at 4.10m						4.10	9.95		
Remarks and Groundwater Observations						GL (m AOD) 14.05		Fig No.	
1. Trial pit complete at 4.10m bgl. 2. Remained dry and stable. 3. Backfilled with arisings upon completion. 4. Coordinates and elevation obtained using survey grade GPS. 5. In-situ resistivity testing carried out at 0.50m, 1.00m, 1.50m and 3.00m depth.						Easting: 453325.76		TP20	
						Northing: 452879.77			