



				DRAFT WINDOW SAMPLING RECORD			BH No. WS02 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 14/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well	
ES	0.40	16.0 18.0 22.0		TOPSOIL: Dark brown slightly sandy CLAY.	0.20	13.75			
				Soft low strength light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
D	0.80	32.0 36.0 36.0 N=8 (1,1/2,2,2,2)	1	Firm to stiff low to medium strength grey mottled reddish brown slightly sandy silty CLAY of medium plasticity (field assessment). Occasional silty sand lenses.	0.55	13.40			
D	2.60	N=9 (1,2/2,2,2,3)	2	Becomes very silty and stiff.	3.30	10.65			
D	3.80	N=11 (2,2/2,2,3,4)	3		5.00	8.95			
D		N=9 (2,1/2,2,2,3)	4	Stiff medium to high strength grey mottled reddish brown slightly sandy slightly gravelly very silty CLAY of medium plasticity (field assessment). Gravel is subangular fine of sandstone. Occasional silty sand lenses.					
		N=18 (5,5/5,4,4,5)	5						
				End of Borehole at 5.00m					
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Groundwater monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.					GL (m AOD) 13.95m AOD		Fig No. WS02		
					Easting: 453179.77				
					Northing: 452788.50				

				DRAFT WINDOW SAMPLING RECORD			BH No. WS03 Sheet 1 of 1				
				Site: Hessay, York			Contract No: C10738				
				Client: Hessay Solar Limited			Date: 14/04/2026				
				Method: Tracked window sampling rig.			Scale: 1:25				
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC			
				Driller: RP Drilling							
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well		
ES	0.10			TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.85				
				Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).							
				Grey fine to medium SAND.							
D	0.80	N=7 (2,1/1,2,2,2)	1	Firm to stiff low to medium strength grey mottled reddish brown slightly sandy slightly gravelly silty thickly laminated CLAY of medium plasticity (field assessment). Gravel is subangular fine to medium of sandstone. Occasional silty sand lenses.		0.55 0.60	13.50 13.45				
D	1.60	N=9 (1,1/2,2,2,3)	2			2.20	11.85				
D	2.70			Firm medium strength dark grey mottled reddish brown slightly sandy clayey thinly laminated SILT of high plasticity (field assessment).							
D	3.80	N=6 (1,2/1,1,2,2)	3	Stiff low to medium strength greyish brown slightly sandy very silty CLAY of high plasticity (field assessment).		2.90	11.15				
		N=7 (1,1/2,1,2,2)	4								
		N=9 (2,2/2,2,2,3)	5	End of Borehole at 5.00m		5.00	9.05				
Remarks and Groundwater Observations:						GL (m AOD) 14.05m AOD		Fig No. WS03			
1. Groundwater from 2.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 453145.52					
						Northing: 452686.67					










				DRAFT WINDOW SAMPLING RECORD			BH No. WS06 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 14/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.40			TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.84		
				Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.50	N=8 (1,2/2,2,2,2)	1	Firm to stiff medium strength reddish brown mottled grey slightly sandy silty CLAY of medium plasticity (field assessment). Rare silty sand lenses.		0.50	13.54		
				<i>Becomes very silty and thin to thickly laminated.</i>					
D	4.20	N=11 (2,1/2,2,3,4)	2						
D	4.80	N=10 (2,2/2,2,3,3)	3						
D	4.80	N=9 (2,1/2,2,2,3)	4						
D	4.80	N=28 (4,6/6,7,7,8)	5	Firm high strength greyish brown sandy silty CLAY of medium plasticity (field assessment).		4.70	9.34		
				End of Borehole at 5.00m		5.00	9.04		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.04m AOD		Fig No. WS06	
						Easting: 453251.46			
						Northing: 452686.39			




				DRAFT WINDOW SAMPLING RECORD			BH No. WS08 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 14/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.40	N=6 (1,1/1,1,2,2)	1	TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.83		
	Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).								
D	0.70			Firm to stiff low to medium strength grey mottled reddish brown slightly sandy slightly gravelly silty thickly laminated CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone. Occasional sand lenses.		0.45	13.58		
D	2.80	N=10 (2,2/2,2,3,3)	2						
	Firm to stiff low to medium strength greyish brown slightly sandy very silty CLAY of high plasticity (field assessment).								
D	5.00	N=10 (1,2/2,3,3,4)	3			2.20	11.83		
D		N=6 (1,2/1,2,1,2)	4						
D		N=13 (2,2/3,3,3,4)	5	Becomes sandy.					
End of Borehole at 5.00m						5.00	9.03		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.03m AOD		Fig No. WS08	
						Easting: 453358.41			
						Northing: 452487.93			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS09 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 14/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well	
D	1.80	N=8 (1,1/2,2,2,2)	1	TOPSOIL: Dark brown slightly sandy CLAY.	0.15	13.84			
				Firm light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
				Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone. Rare silty sand lenses. <u>Becomes very silty and thickly laminated.</u>	0.45	13.54			
D	3.80	N=10 (2,2/2,2,3,3)	2						
D		N=12 (2,2/2,3,3,4)	3						
D		N=10 (2,1/2,2,3,3)	4						
D		N=16 (3,2/2,4,5,5)	5						
				Stiff high strength greyish brown slightly sandy very silty CLAY of high plasticity (field assessment).	4.80	9.19			
				End of Borehole at 5.00m	5.00	8.99			
Remarks and Groundwater Observations:					GL (m AOD) 13.99m AOD		Fig No.		
1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.					Easting: 453436.22		WS09		
					Northing: 452487.57				



				DRAFT WINDOW SAMPLING RECORD			BH No. WS10 Sheet 1 of 1	
				Site: Hessay, York			Contract No: C10738	
				Client: Hessay Solar Limited			Date: 14/04/2026	
				Method: Tracked window sampling rig.			Scale: 1:25	
SAMPLE DETAILS				STRATA RECORD			Logged By: CA Checked By: AEC	
				Driller: RP Drilling				
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well
ES	0.10	N=9 (1,2/2,2,2,3)	1	TOPSOIL: Dark brown slightly sandy CLAY.	0.20	13.83		
				Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).				
						Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly silty thickly laminated CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone. Occasional sand lenses.	0.80	13.23
D	1.60	N=11 (2,2/3,2,3,3)	2					
						Firm to stiff medium strength reddish brown mottled grey slightly sandy gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to rounded fine to coarse of sandstone, limestone and quartz.	2.30	11.73
D	2.80	N=13 (2,2/3,3,3,4)	3					
						Firm to stiff medium strength greyish brown slightly sandy very silty CLAY of high plasticity (field assessment).	3.60	10.43
		N=10 (2,1/2,2,3,3)	4					
D	4.60	N=24 (3,2/4,6,7,7)	5		5.00	9.03		
				End of Borehole at 5.00m				
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.					GL (m AOD) 14.03m AOD		Fig No. WS10	
					Easting: 453448.97			
					Northing: 452586.36			

				DRAFT WINDOW SAMPLING RECORD		BH No. WS11 Sheet 1 of 1		
				Site: Hessay, York		Contract No: C10738		
				Client: Hessay Solar Limited		Date: 14/04/2026		
				Method: Tracked window sampling rig.		Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA Checked By: AEC		
				Driller: RP Drilling				
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well
D	1.20	N=7 (2,1/2,1,2,2)	1	TOPSOIL: Dark brown slightly sandy CLAY.	0.20	13.83		
				Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).				
				Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly silty thickly laminated CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone. Occasional sand lenses.				
D	2.20	N=10 (2,2/2,2,3,3)	2		0.45	13.58		
D	3.80	N=13 (2,2/3,3,3,4)	3		3.35	10.68		
		N=10 (2,2/2,2,3,3)	4	Stiff medium strength greyish brown mottled grey slightly sandy gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is subangular to rounded fine to coarse of sandstone, limestone and quartz.	4.20	9.83		
		N=17 (2,3/3,4,4,6)	5	Stiff medium strength greyish brown slightly sandy slightly gravelly clayey SILT of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone.	5.00	9.03		
				Becomes sandy.				
				End of Borehole at 5.00m				
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Groundwater monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.					GL (m AOD) 14.03m AOD		Fig No. WS11	
					Easting: 453346.09			
					Northing: 452591.38			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS12 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 15/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.87		
				Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
				Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly silty thickly laminated CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone. Frequent silty sand lenses.					
D	0.80	N=9 (1,2/2,2,2,3)	1			0.40	13.67		
D	0.80	N=10 (2,2/2,2,3,3)	2						
D	0.80	N=12 (2,2/3,3,3,3)	3	Becomes gravelly.					
D	3.50	N=12 (2,2/3,3,3,3)	3						
D	3.50	N=9 (2,1/1,2,2,4)	4	Firm to stiff medium strength greyish brown slightly sandy slightly gravelly very silty CLAY of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone.		3.60	10.47		
D	3.50	N=35 (7,7/8,9,9,9)	5	Becomes sandy.					
End of Borehole at 5.00m						5.00	9.07		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.07m AOD		Fig No.	
						Easting: 453346.12		WS12	
						Northing: 452686.59			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS14 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 15/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.40	36.0		TOPSOIL: Dark brown slightly sandy CLAY.		0.30	13.90		
		Soft low strength light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).							
		36.0							
D	0.80	38.0		Firm to stiff medium to high strength reddish brown mottled grey slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone. Occasional silty sand lenses.		0.50	13.70		
		44.0							
		48.0							
D	0.80	50.0	1	<i>Becomes thickly laminated.</i>					
		N=7							
		(1,1/2,2,1,2)							
D	2.50	60.0	2						
		66.0							
		66.0							
D	2.50	N=10	2						
		(2,2/2,2,3,3)							
D	2.50	74.0	3						
		80.0							
		82.0							
D	2.50	N=7	3						
		(1,1/2,1,2,2)							
D	4.50		4	Firm medium strength greyish brown slightly sandy silty CLAY of high plasticity (field assessment).		3.70	10.50		
		N=8							
		(1,2/2,2,2,2)							
D	4.50		4						
D	4.90		5	<i>Becomes sandy.</i>					
		N=15							
		(4,4/4,3,4,4)							
				End of Borehole at 5.00m		5.00	9.20		
Remarks and Groundwater Observations:						GL (m AOD) 14.20m AOD		Fig No.	
1. Groundwater encountered at 4.65m bgl. 2. Monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 453285.38		WS14	
						Northing: 452332.12			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS15 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 15/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.60 - 2.60	30.0 32.0 36.0	1	TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.78		
		Firm low strength grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).							
D	2.60	N=7 (2,1/1,2,2,2)	2	Firm to stiff low to medium strength reddish brown mottled grey slightly sandy silty CLAY of medium plasticity (field assessment). Rare sand lenses.		0.90	13.08		
		42.0 44.0 44.0							
		N=9 (2,1/2,2,3,2)							
D	2.60	N=10 (1,2/2,3,2,3)	3	Firm to stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly silty CLAY of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone and quartz.		2.50	11.48		
		N=8 (1,1/2,2,2,2)							
		N=13 (2,2/2,3,4,4)	4						
			5	Becomes soft and sandy.		5.00	8.98		
				End of Borehole at 5.00m					
Remarks and Groundwater Observations: 1. Groundwater from 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.98m AOD		Fig No. WS15	
						Easting: 453262.56			
						Northing: 452380.79			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS16 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 15/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES	0.15			TOPSOIL: Dark brown slightly sandy CLAY.						
				Soft orangish brown mottled grey slightly sandy slightly silty CLAY of medium plasticity (field assessment).			0.25	13.71		
				Firm to stiff low to medium strength reddish brown mottled grey slightly sandy silty CLAY of medium plasticity (field assessment). Frequent silty sand lenses.			0.70	13.26		
D	0.90	26.0 34.0 38.0 N=8 (1,1/2,2,2,2)	1	<i>Becomes thickly laminated.</i>						
D	1.80	54.0 58.0 60.0 N=8 (1,1/2,2,2,2)	2							
				Firm low to medium strength greyish brown slightly sandy very silty CLAY of high plasticity (field assessment).			2.70	11.26		
		N=9 (2,2/1,2,2,3)	3							
D	3.50	N=7 (1,1/1,2,2,2)	4							
		N=7 (1,2/1,2,2,2)	5	End of Borehole at 5.00m			5.00	8.96		
Remarks and Groundwater Observations:							GL (m AOD) 13.96m AOD		Fig No.	
1. Groundwater from 2.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							Easting: 453187.84		WS16	
							Northing: 452488.41			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS17 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 15/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	1.50	42.0 48.0 52.0		TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.94		
				Firm medium strength light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
				Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone. Frequent silty sand lenses.		0.55	13.59		
1 <u>Becomes sandy and thickly laminated.</u>									
D	2.90	N=9 (1,1/2,2,2,3)				2.40	11.74		
				Stiff medium strength greyish brown mottled grey slightly sandy slightly gravelly silty CLAY of high plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, limestone and quartz.					
				N=13 (3,3/3,3,4,3)		3			5.00
N=8 (1,2/2,2,2,2)		4							
N=9 (1,2/2,2,2,3)			5						
				End of Borehole at 5.00m					
Remarks and Groundwater Observations: 1. Groundwater from 2.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.14m AOD		Fig No. WS17	
						Easting: 453083.61			
						Northing: 452490.03			





				DRAFT WINDOW SAMPLING RECORD			BH No. WS18 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 16/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES	0.30	44.0 48.0 50.0		TOPSOIL: Dark brown slightly sandy CLAY.			0.20	14.03		
				Firm medium strength grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).						
D	2.50	56.0 58.0 62.0 N=8 (2,2/2,2,2,2)	1	Firm medium strength grey mottled reddish brown slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone. Rare sand lenses.			0.60	13.63		
D	2.50	66.0 68.0 74.0 N=9 (2,1/2,2,2,3)	2							
D	2.50	N=10 (1,2/3,2,3,2)	3	Firm medium strength greyish brown slightly sandy very silty CLAY of high plasticity (field assessment).			2.80	11.43		
D	4.50	N=8 (4,4/3,2,1,2)	4	Loose grey silty slightly clayey SAND. Sand is fine to medium.			3.90	10.33		
D	4.50	N=10 (1,2/3,2,2,3)	5				5.00	9.23		
				End of Borehole at 5.00m						
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 14.23m AOD		Fig No. WS18	
							Easting: 452980.57			
							Northing: 452492.07			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS19 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 16/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.84		
				Soft light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
D	0.60					0.80	13.24		
		N=7 (1,1/2,1,2,2)	1	Firm to stiff medium strength reddish brown mottled grey slightly sandy silty thickly laminated CLAY of medium plasticity (field assessment). Frequent silty sand lenses.		0.80	13.24		
		60.0 66.0 70.0				0.80	13.24		
		N=8 (1,2/1,2,2,3)	2	Becomes sandy.		0.80	13.24		
D	2.50					2.80	11.24		
		N=6 (1,1/1,1,2,2)	3	Firm low strength greyish brown slightly sandy silty CLAY of high plasticity (field assessment).		2.80	11.24		
						2.80	11.24		
		N=7 (1,1/1,2,2,2)	4			2.80	11.24		
						2.80	11.24		
		N=6 (1,1/1,1,2,2)	5			2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		
						2.80	11.24		

				DRAFT WINDOW SAMPLING RECORD			BH No. WS20 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 16/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.80	30.0 32.0 36.0		TOPSOIL: Dark brown slightly sandy CLAY.		0.15	13.94		
				Firm medium strength light brown mottled grey and orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
				Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is angular to subangular fine to medium of sandstone. Frequent silty sand lenses.		0.50	13.58		
1 <i>Becomes thickly laminated.</i>									
D	1.80	62.0 64.0 68.0 N=9 (1,2/1,3,2,3)	2			2.95	11.14		
3 <i>Soft low strength greyish brown slightly sandy slightly gravelly very silty CLAY of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone and quartz.</i>									
D		3.60							
D	4.50	N=4 (0,1/1,1,1,1)	4			5.00	9.09		
				5 <i>Becomes sandy.</i>					
				End of Borehole at 5.00m					
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Groundwater monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.08m AOD		Fig No. WS20	
						Easting: 452972.55			
						Northing: 452584.99			


				DRAFT WINDOW SAMPLING RECORD			BH No. WS21 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 16/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.40			TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.97		
				Soft to firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.30	N=8 (1,1/2,2,2,2)	1	Firm to stiff medium strength reddish brown mottled grey slightly sandy silty thickly laminated CLAY of medium plasticity (field assessment). Frequent silty sand lenses.		0.75	13.42		
D	2.70	66.0 68.0 74.0 N=8 (1,1/2,2,2,2)	2	Soft to firm low to medium strength greyish brown slightly sandy silty CLAY of high plasticity (field assessment).		2.30	11.87		
D	4.80	26.0 30.0 30.0 N=5 (1,1/1,1,1,2)	3			4.30	9.87		
				Firm greyish brown sandy very silty CLAY of high plasticity (field assessment).					
		N=10 (2,3/2,3,2,3)	4						
		N=15 (3,3/3,3,5,4)	5	End of Borehole at 5.00m		5.00	9.17		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.17m AOD		Fig No. WS21	
						Easting: 452862.93			
						Northing: 452586.18			




				DRAFT WINDOW SAMPLING RECORD			BH No. WS22 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 16/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.10			TOPSOIL: Dark brown slightly sandy CLAY.		0.15	14.14		
				Soft to firm low strength grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.80	26.0 30.0 34.0 N=7 (1,1/1,2,2,2)	1	Firm medium strength grey mottled reddish brown slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. Occasional sand lenses.		0.80	13.49		
				<i>Becomes thickly laminated.</i>					
D	1.80	60.0 64.0 64.0 N=4 (1,1/1,1,1,1)	2	<i>Rare decayed roots.</i>		2.35	11.94		
				Soft low strength sandy very silty thin to thickly laminated CLAY of high plasticity (field assessment).					
D	2.80	N=2 (0,0/1,0,1,0)	3			3.50	10.79		
				Firm high strength greyish brown sandy slightly clayey SILT of medium plasticity (field assessment).					
D	3.80	N=25 (4,4/4,5,7,9)	4			4.50	9.79		
				Medium dense greyish brown silty SAND. Sand is fine to medium.					
D	4.70	N=12 (1,2/1,3,4,4)	5			5.00	9.29		
				End of Borehole at 5.00m					
Remarks and Groundwater Observations: 1. Groundwater from 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.29m AOD Easting: 452740.97 Northing: 452583.87		Fig No. WS22	


				DRAFT WINDOW SAMPLING RECORD			BH No. WS23 Sheet 1 of 1	
				Site: Hessay, York			Contract No: C10738	
				Client: Hessay Solar Limited			Date: 16/04/2026	
				Method: Tracked window sampling rig.			Scale: 1:25	
SAMPLE DETAILS				STRATA RECORD			Logged By: CA Checked By: AEC	
				Driller: RP Drilling				
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well
D	0.40	N=10 (2,1/2,2,3,3)	1	TOPSOIL: Dark brown slightly sandy CLAY.	0.20	13.94		
				Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).				
				Firm to stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. Occasional sand lenses.	0.65	13.50		
D	3.50	N=8 (2,2/2,2,2,2)	2		2.25	11.90		
				Firm low to medium strength slightly sandy very silty CLAY of high plasticity (field assessment).	5.00	9.14		
D		N=7 (1,1/1,2,2,2)	3					
								
D		N=8 (1,1/1,2,2,3)	4					
								
D		N=7 (1,1/2,2,1,2)	5	Becomes sandy.	5.00	9.14		
				End of Borehole at 5.00m				
				Remarks and Groundwater Observations:				
1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.					Easting: 452858.85		WS23	
					Northing: 452686.34			







				DRAFT WINDOW SAMPLING RECORD			BH No. WS24 Sheet 1 of 1	
				Site: Hessay, York			Contract No: C10738	
				Client: Hessay Solar Limited			Date: 17/04/2026	
				Method: Tracked window sampling rig.			Scale: 1:25	
SAMPLE DETAILS				STRATA RECORD			Logged By: CA Checked By: AEC	
				Driller: RP Drilling				
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Dark brown slightly sandy CLAY.	0.20	13.77		
				Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).				
				Firm to stiff low to medium strength grey mottled reddish brown slightly sandy silty CLAY of medium plasticity (field assessment). Occasional sand lenses.				
D	0.70	N=10 (2,1/2,2,3,3)	1	Becomes thickly laminated.	0.50	13.47		
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
								
Remarks and Groundwater Observations:				GL (m AOD) 13.97m AOD		Fig No.		
1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.				Easting: 452942.77		WS24		
				Northing: 452685.37				

				DRAFT WINDOW SAMPLING RECORD			BH No. WS25 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 17/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.50	16.0 20.0 22.0 N=6 (1,1/1,1,2,2)	1	TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.74		
				Soft to firm very low to low strength grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.70	54.0 58.0 66.0 N=5 (1,1/1,1,1,2)	2	Firm to stiff low to medium strength grey mottled reddish brown slightly sandy silty thickly laminated CLAY of medium to high plasticity (field assessment). Frequent sand lenses.		0.95	12.99		
D	2.70	N=4 (1,1/1,1,1,1,1) N=7 (1,1/1,2,2,2,2)	3	Soft to firm low strength greyish brown slightly sandy silty CLAY of high plasticity (field assessment).		2.00	11.94		
			4						
			5	End of Borehole at 5.00m		5.00	8.94		
Remarks and Groundwater Observations: 1. Groundwater from 2.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.94m AOD		Fig No. WS25	
						Easting: 453040.13			
						Northing: 452686.37			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS27 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 17/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Dark brown slightly sandy CLAY.		0.15	13.84		
				Soft to firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.20	36.0 38.0 44.0 N=8 (1,2/2,2,2,2)	1	Firm to stiff low to medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium to high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone. Frequent sand lenses. <i>Becomes thickly laminated.</i>		0.50	13.49		
D	2.60	54.0 60.0 68.0 N=9 (2,1/2,2,2,3)	2						
D		N=11 (2,2/2,3,3,3)	3	Firm medium strength greyish brown slightly sandy slightly gravelly silty CLAY of high plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. <i>Becomes very sandy.</i>		2.90	11.09		
		50 (2,1/50 for 115mm)	4	End of Borehole at 4.00m		4.00	9.99		
			5						
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.99m AOD		Fig No. WS27	
						Easting: 453258.83			
						Northing: 452785.57			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS29 Sheet 1 of 1	
				Site: Hessay, York			Contract No: C10738	
				Client: Hessay Solar Limited			Date: 17/04/2026	
				Method: Tracked window sampling rig.			Scale: 1:25	
SAMPLE DETAILS				STRATA RECORD			Logged By: CA Checked By: AEC	
				Driller: RP Drilling				
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Dark brown slightly sandy CLAY.	0.20	13.80		
				Soft to firm orangish brown mottled grey sandy slightly silty CLAY of medium plasticity (field assessment).				
D	0.60				0.90	13.10		
		34.0 36.0 40.0 N=7 (2,1/1,2,2,2)	1	Firm to stiff low to medium strength reddish brown mottled grey slightly sandy slightly silty CLAY of medium to high plasticity (field assessment). Frequent sand lenses. <i>Becomes thickly laminated.</i>				
D	1.60				2.40	11.60		
		N=8 (2,2/2,2,2,2)	2					
				Soft to firm low to medium strength greyish brown mottled grey and reddish brown slightly sandy slightly gravelly very silty CLAY of high plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone, quartz and limestone.	2.40	11.60		
		60.0 64.0 68.0 N=9 (2,2/2,2,2,3)	3					
D	3.60				5.00	9.00		
		N=6 (2,1/1,2,1,2)	4					
					5.00	9.00		
		N=9 (1,2/2,2,2,3)	5	End of Borehole at 5.00m				
Remarks and Groundwater Observations:					GL (m AOD) 14.00m AOD		Fig No.	
1. No groundwater encountered. 2. Groundwater monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.					Easting: 453387.65		WS29	
					Northing: 452904.06			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS30 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 17/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Dark brown slightly sandy CLAY.		0.15	13.84		
				Soft to firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	0.90	N=7 (1,1/2,1,2,2)	1	Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Frequent sand lenses. <i>Becomes silty and thickly laminated.</i>		0.45	13.54		
D	3.60	N=9 (2,2/2,2,2,3)	2			2.20	11.79		
D	4.90	N=9 (2,2/2,2,2,3)	3	Firm medium strength greyish brown mottled grey and reddish brown slightly sandy slightly gravelly very silty CLAY of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone, quartz and limestone.		5.00	8.99		
D		N=10 (2,1/2,3,2,3)	4						
D		N=19 (2,3/4,4,5,6)	5	<i>Becomes very sandy.</i>					
End of Borehole at 5.00m									
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.99m AOD		Fig No. WS30	
						Easting: 453363.08			
						Northing: 452782.15			


				DRAFT WINDOW SAMPLING RECORD			BH No. WS31 Sheet 1 of 1				
				Site: Hessay, York			Contract No: C10738				
				Client: Hessay Solar Limited			Date: 20/04/2026 - 21/04/2026				
				Method: Tracked window sampling rig.			Scale: 1:25				
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC			
						Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well		
ES	0.10	N=9 (2,1/2,2,2,3)	1	TOPSOIL: Dark brown slightly sandy CLAY.		0.25	13.72				
D	0.40			Soft to firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).							
				<i>Becomes sandy.</i>							
D	2.80	N=10 (2,1/2,3,2,3)	2	Firm to stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Frequent sand lenses.		0.60	13.37				
				<i>Becomes thickly laminated.</i>							
D	4.20	N=4 (1,1/1,1,1,1,1)	3	Soft to firm low to medium strength greyish brown mottled grey and reddish brown slightly sandy silty CLAY of high plasticity (field assessment).		2.10	11.87				
D	4.20	N=9 (2,2/2,2,2,3)	4								
D	4.20	N=7 (2,1/1,2,2,2)	5	End of Borehole at 5.00m		5.00	8.97				
Remarks and Groundwater Observations:						GL (m AOD) 13.97m AOD		Fig No. WS31			
1. Groundwater from 2.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 452939.25					
						Northing: 452982.89					

				DRAFT WINDOW SAMPLING RECORD			BH No. WS32 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.74		
				Soft to firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	0.80	N=8 (1,2/2,2,2,2)	1	Firm to stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone. Frequent sand lenses.		0.55	13.38		
				<i>Becomes thickly laminated.</i>					
D	3.60	N=10 (1,2/2,2,3,3)	2	Firm low to medium strength greyish brown mottled grey and reddish brown slightly sandy silty CLAY of high plasticity (field assessment).		1.95	11.98		
				<i>Becomes very silty and high plasticity with occasional sand lenses.</i>					
D	3.60	N=9 (1,2/2,2,2,3)	3						
D	3.60	N=7 (1,1/1,2,2,2)	4						
D	3.60	N=13 (2,2/2,3,4,4)	5						
End of Borehole at 5.00m						5.00	8.94		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.94m AOD		Fig No. WS32	
						Easting: 452895.39			
						Northing: 452906.51			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS33 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.10	24.0 28.0 30.0 N=8 (1,1/2,2,2,2)	1	TOPSOIL: Dark brown slightly sandy CLAY.		0.20	13.64		
				Firm low strength grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Firm to stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. <i>Becomes thickly laminated with frequent sand lenses.</i>		0.75	13.09		
D	1.70	44.0 48.0 50.0 N=8 (1,2/2,2,2,2)	2	Firm medium strength greyish brown slightly sandy silty thickly laminated CLAY of high plasticity (field assessment).		2.05	11.79		
D	2.70	54.0 58.0 60.0 N=7 (1,1/1,2,2,2,2)	3						
D	4.60	N=8 (1,1/2,2,2,2,2)	4						
D		N=8 (1,1/2,2,2,2,2)	5	End of Borehole at 5.00m		5.00	8.84		
Remarks and Groundwater Observations:						GL (m AOD) 13.84m AOD		Fig No.	
1. Groundwater seepage encountered from 2.00m bgl. 2. Groundwater monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 452989.16		WS33	
						Northing: 452905.82			


				DRAFT WINDOW SAMPLING RECORD			BH No. WS34 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Dark brown slightly sandy CLAY.		0.15	13.67		
				Firm low strength grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	0.60	26.0 28.0 34.0		Firm to stiff low strength grey mottled reddish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).		0.80	13.02		
				<i>Becomes thickly laminated with occasional sand lenses.</i>					
D	3.50	N=6 (1,1/1,2,1,2)				2.55	11.27		
				Firm low strength greyish brown mottled grey slightly sandy silty CLAY of high plasticity (field assessment).					
D		N=6 (1,1/1,1,2,2)				5.00	8.82		
				End of Borehole at 5.00m					
Remarks and Groundwater Observations:						GL (m AOD) 13.82m AOD		Fig No.	
1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 452994.78		WS34	
						Northing: 452780.31			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS35 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.80	32.0 36.0 38.0	1	TOPSOIL: Dark brown slightly sandy CLAY.		0.10	13.80		
				Firm low strength grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.80	34.0 34.0 40.0 N=8 (1,2/2,2,2,2)	2	Firm to stiff low to medium strength grey mottled reddish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment). <i>Becomes thickly laminated with frequent sand lenses.</i>		0.65	13.25		
				<i>Becomes silty.</i>					
D	3.80	N=8 (1,1/2,2,2,2,2)	3			3.20	10.70		
				Firm low to medium strength greyish brown mottled grey slightly sandy very silty thin to thickly laminated CLAY of high plasticity (field assessment).					
D	4.80	N=7 (1,1/1,2,2,2,2)	4			4.70	9.20		
				Firm medium strength greyish brown mottled reddish brown slightly sandy slightly gravelly silty CLAY of of low plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and quartz. Rare sand pockets.					
			5	End of Borehole at 5.00m		5.00	8.90		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.90m AOD		Fig No. WS35	
						Easting: 453080.40			
						Northing: 452783.53			



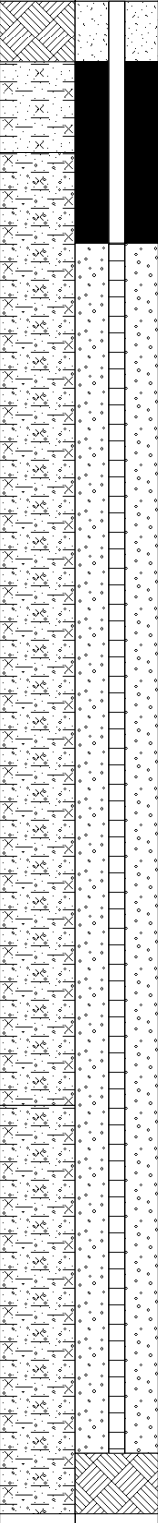
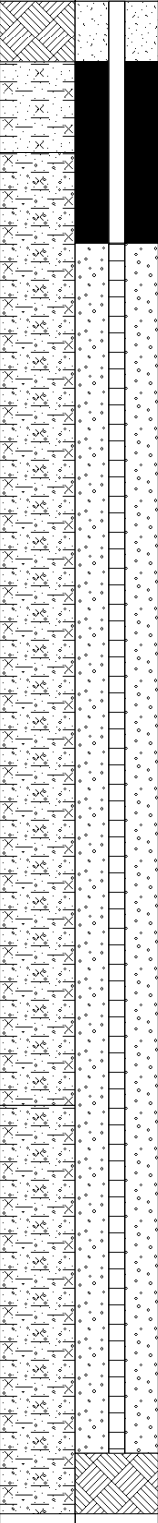
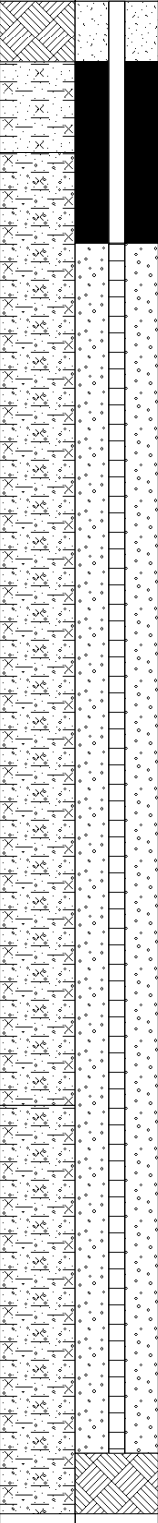
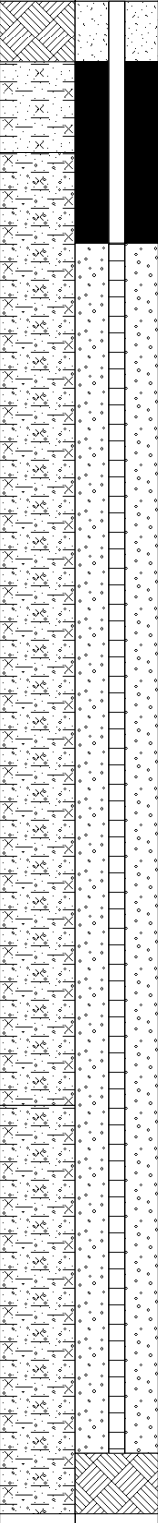
				DRAFT WINDOW SAMPLING RECORD			BH No. WS37 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 21/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES	0.10	N=9 (2,1/2,2,2,3)	1	TOPSOIL: Brown slightly sandy CLAY.			0.15	14.02		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).						
D	0.80	N=10 (2,1/2,2,2,3,3)	2	Firm to stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subangular fine to medium of sandstone and limestone.			0.80	13.37		
D	1.80	N=10 (2,1/2,2,3,3,3)	3	<i>Becomes thickly laminated.</i>			3.10	11.07		
				<i>Becomes silty.</i>						
D	3.80	N=8 (1,2/1,2,2,3)	4	Firm to stiff medium strength greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone, limestone and quartz.			5.00	9.17		
		N=20 (2,2/3,3,8,6)	5							
				End of Borehole at 5.00m						
Remarks and Groundwater Observations: 1. Groundwater from 3.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 14.17m AOD		Fig No. WS37	
							Easting: 453724.74			
							Northing: 452077.62			


				DRAFT WINDOW SAMPLING RECORD			BH No. WS38 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.25			TOPSOIL: Brown slightly sandy CLAY.		0.20	15.37		
	0.40			Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.60	N=10 (2,1/2,2,3,3)	1	Stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.		0.55	15.02		
D	2.70	N=12 (2,2/3,3,2,4)	2						
D		N=8 (1,1/2,2,2,2)	3	Stiff medium strength greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone, limestone and quartz.		2.90	12.67		
		50 (2,2/50 for 225mm)	4	End of Borehole at 4.00m		4.00	11.57		
			5						
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 15.57m AOD		Fig No. WS38	
						Easting: 453702.76			
						Northing: 452177.55			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS40 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	1.70	N=8 (1,1/2,2,2,2)	1	TOPSOIL: Brown slightly sandy CLAY.		0.25	13.70		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment). <i>Becomes sandy.</i>					
D	2.80	N=8 (1,1/2,2,2,2,3) 68.0 80.0 88.0 N=9 (2,1/2,2,2,3)	2	Stiff medium to high strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone. <i>Becomes thickly laminated.</i>		0.65	13.30		
D	2.80	N=8 (1,2/2,2,2,2)	3	Firm to soft medium to low strength greyish brown slightly sandy silty thickly laminated CLAY of high plasticity (field assessment).		2.50	11.45		
		N=2 (1,2/0,0,1,1)	4	<i>Becomes sandy.</i>					
		N=6 (1,1/1,1,1,3)	5	End of Borehole at 5.00m		5.00	8.95		
Remarks and Groundwater Observations: 1. Groundwater from 3.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.95m AOD		Fig No. WS40	
						Easting: 453524.27			
						Northing: 452185.83			





				DRAFT WINDOW SAMPLING RECORD			BH No. WS41 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.40	44.0 48.0 52.0		TOPSOIL: Brown slightly sandy CLAY.		0.20	13.64		
				Firm medium strength grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	0.90	N=9 (1,2/2,2,3,2)	1	Stiff medium to high strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine of sandstone.		0.60	13.24		
				<i>Becomes thickly laminated with rare sand lenses.</i>					
				<i>Becomes silty.</i>					
		100.0 70.0 94.0 N=10 (2,1/2,3,2,3)	2						
		66.0 68.0 70.0 N=8 (2,2/2,2,2,2)	3	Firm to stiff medium strength greyish brown slightly sandy silty thickly laminated CLAY of high plasticity (field assessment).		2.95	10.89		
		N=8 (2,2/2,2,2,2)	4						
D	4.90	N=30 (3,4/5,7,9,9)	5	End of Borehole at 5.00m		5.00	8.84		
Remarks and Groundwater Observations: 1. Groundwater seepage encountered from 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 13.84m AOD		Fig No. WS41	
						Easting: 453508.65			
						Northing: 452274.18			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS42 Sheet 1 of 1	
				Site: Hessay, York			Contract No: C10738	
				Client: Hessay Solar Limited			Date: 21/04/2026	
				Method: Tracked window sampling rig.			Scale: 1:25	
SAMPLE DETAILS				STRATA RECORD			Logged By: CA Checked By: AEC	
				Driller: RP Drilling				
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well
ES	0.30	58.0 62.0 64.0 N=8 (2,1/2,2,2,2)		TOPSOIL: Brown slightly sandy CLAY.	0.20	13.86		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).				
				Stiff medium to high strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine of sandstone.				
D	3.90	74.0 80.0 86.0 N=9 (2,1/2,2,3,2)		1 <i>Becomes thickly laminated.</i>	0.50	13.56		
				2 <i>Becomes silty and thickly laminated.</i>				
				3				
D	4.90	N=11 (2,2/2,3,3,3)		Stiff medium strength greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.	3.65	10.41		
				4				
D	4.90	N=30 (3,4/5,7,9,9)		End of Borehole at 5.00m	5.00	9.06		
Remarks and Groundwater Observations:					GL (m AOD) 14.06m AOD		Fig No.	
1. Groundwater encountered at 3.40m bgl. 2. Monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.					Easting: 453610.37		WS42	
					Northing: 452076.20			




				DRAFT WINDOW SAMPLING RECORD			BH No. WS43 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 21/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description	Depth (m)	Level (m AOD)	Legend	Well	
		N=9 (1,2/2,2,2,3)	1	TOPSOIL: Brown slightly sandy CLAY.	0.20	14.01			
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff medium to low strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.					
				<i>Becomes silty and thickly laminated.</i>					
				N=8 (2,1/2,2,2,2)	2	<i>Band of greyish brown silt.</i>			
						N=9 (2,2/2,2,2,3)			3
				N=7 (1,1/1,2,2,2)	4				
						N=21 (6,6/6,5,5,5)			5
				Stiff greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.					
									5.00
Remarks and Groundwater Observations:					GL (m AOD) 14.21m AOD		Fig No. WS43		
1. Groundwater encountered at 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.					Easting: 453703.42				
					Northing: 451985.17				

				DRAFT WINDOW SAMPLING RECORD			BH No. WS44 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 22/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Brown slightly sandy CLAY.					
D	0.40			Firm grey mottled orangish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular fine to coarse of sandstone.		0.20	14.14		
		46.0 56.0 60.0 N=10 (2,2/2,2,3,3)	1	Stiff medium to high strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone. <i>Becomes silty and thickly laminated.</i>		0.60	13.74		
D	1.70	66.0 74.0 82.0 N=9 (2,2/2,2,2,3)	2	<i>High plasticity.</i>					
		N=13 (3,3/3,3,3,4)	3	Stiff medium to low strength greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.		2.95	11.39		
D	3.80	N=7 (1,2/1,2,2,2)	4						
		N=18 (3,4/4,4,5,5)	5	End of Borehole at 5.00m		5.00	9.34		
Remarks and Groundwater Observations: 1. Groundwater from 3.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.34m AOD		Fig No. WS44	
						Easting: 453521.57			
						Northing: 451804.86			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS45 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 22/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
D	0.90	36.0 36.0 40.0 48.0 52.0 60.0 N=9 (2,1/2,2,2,3)	1	TOPSOIL: Brown slightly sandy CLAY.			0.20	14.09		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).						
				Stiff low to medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.						
D	2.50	66.0 68.0 74.0 N=10 (2,2/2,2,3,3)	2	<i>Becomes thickly laminated.</i>			0.55	13.74		
				<i>Becomes silty with a high plasticity.</i>						
				<i>Becomes very sandy.</i>						
D	4.60	N=7 (1,2/1,2,2,2) N=8 (2,1/2,2,2,2) N=19 (4,4/4,4,5,6)	3	Firm medium strength greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.			3.20	11.09		
D			4				5.00	9.29		
				End of Borehole at 5.00m						
Remarks and Groundwater Observations: 1. Groundwater from 3.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 14.29m AOD		Fig No. WS45	
							Easting: 453552.19			
							Northing: 451896.13			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS46 Sheet 1 of 2		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 22/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
						Driller: RP Drilling			
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground-water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Brown slightly sandy CLAY.		0.20	13.96		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
D	1.60	56.0 60.0 64.0 N=10 (1,2/2,2,3,3)	1	Stiff medium to high strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.		0.60	13.56		
				<i>Becomes thickly laminated.</i>					
D	2.60	64.0 72.0 78.0 N=9 (2,1/2,2,2,3)	2			2.35	11.81		
				Firm medium to low strength greyish brown slightly sandy silty thin to thickly laminated CLAY of high plasticity (field assessment).					
D	2.60	42.0 50.0 56.0 N=7 (1,1/2,1,2,2)	3			4.60	9.56		
				<i>Becomes sandy.</i>					
D	2.60	36.0 38.0 40.0 N=9 (2,2/2,2,3,2)	4			5.00	9.16		
				Firm low to very low strength greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.					
D	2.60	24.0 28.0 30.0 12.0 18.0 30.0	5						
				Continued next sheet					
Remarks and Groundwater Observations:						GL (m AOD) 14.16m AOD		Fig No.	
1. Groundwater seepage encountered from 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 453646.32		WS46	
						Northing: 451900.30			

				DRAFT WINDOW SAMPLING RECORD				BH No. WS46 Sheet 2 of 2			
				Site: Hessay, York				Contract No: C10738			
				Client: Hessay Solar Limited				Date: 22/04/2026			
				Method: Tracked window sampling rig.				Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD				Logged By: CA		Checked By: AEC	
								Driller: RP Drilling			
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description				Depth (m)	Level (m AOD)	Legend	Well
		N=17 (3,3/3,4,5,5)		End of Borehole at 5.00m							
			6								
			7								
			8								
			9								
			10								
Remarks and Groundwater Observations:							GL (m AOD)		Fig No. WS46		
1. Groundwater seepage encountered from 4.00m bgl. 2. Backfilled with arisings upon completion. 3.							14.16m AOD				
Coordinates and elevations obtained using survey grade GPS.							Easting:				
							453646.32				
							Northing:				
							451900.30				

				DRAFT WINDOW SAMPLING RECORD			BH No. WS47 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 22/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Brown slightly sandy CLAY.			0.20	13.95		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).						
D	1.50	N=10 (2,1/2,2,3,3)	1	Stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone. <i>Becomes thickly laminated.</i>			0.70	13.45		
D	3.50	N=8 (2,1/2,2,2,2,2)	2	Firm medium strength greyish brown slightly sandy silty thin to thickly laminated CLAY of high plasticity (field assessment).			2.20	11.95		
D		N=9 (2,1/2,2,2,3)	3							
		40.0 44.0 48.0 N=7 (1,2/1,2,2,2)	4							
		24.0 30.0 32.0 N=24 (3,5/5,6,6,7)	5	Firm greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone and limestone.			4.55	9.60		
				End of Borehole at 5.00m			5.00	9.15		
Remarks and Groundwater Observations: 1. Groundwater seepage encountered from 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 14.15m AOD		Fig No. WS47	
							Easting: 453607.04			
							Northing: 451984.38			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS48 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 22/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
D	0.90	54.0 56.0 62.0 N=10 (2,2/2,2,3,3)	1	TOPSOIL: Brown slightly sandy CLAY.			0.20	14.11		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).						
				Stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone.			0.50	13.81		
D	3.00	N=13 (1,2/3,4,3,3)	2	Becomes silty and thickly laminated.			2.90	11.41		
				Firm low strength greyish brown slightly sandy slightly clayey SILT of medium plasticity (field assessment).						
				Firm low to medium strength greyish brown slightly sandy silty CLAY of high plasticity (field assessment).						
D	3.80	36.0 42.0 46.0 N=8 (2,2/2,2,2,2)	3				3.20	11.11		
							4.30	10.01		
				Stiff greyish brown sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone and limestone.						
		N=15 (4,4/4,3,4,4)	4				5.00	9.31		
				End of Borehole at 5.00m						
Remarks and Groundwater Observations: 1. Groundwater encountered at 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 14.31m AOD		Fig No. WS48	
							Easting: 453447.94			
							Northing: 451896.21			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS49 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 22/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
						Driller: RP Drilling			
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Brown slightly sandy CLAY.		0.15	14.13		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone.		0.55	13.73		
D	1.80	N=9 (1,2/2,2,2,3)	1	<i>Becomes thickly laminated.</i>					
		N=10 (3,3/2,2,3,3)	2						
D	2.80	54.0 60.0 68.0 N=7 (1,2/1,2,2,2)	3	Firm to stiff low to medium strength greyish brown slightly sandy silty thin to thickly laminated CLAY of high plasticity (field assessment).		2.30	11.98		
		38.0 40.0 44.0 N=6 (1,1/1,2,1,2)	4						
		N=25 (4,5/5,6,7,7)	5						
End of Borehole at 5.00m						5.00	9.28		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.28m AOD		Fig No. WS49	
						Easting: 453419.24			
						Northing: 451988.98			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS51 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 23/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.70	N=12 (2,2/3,3,3,3)	1	TOPSOIL: Brown slightly sandy CLAY.		0.20	14.07		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone.					
D	2.50	N=10 (2,2/2,2,3,3)	2	Becomes silty and thickly laminated.		0.50	13.77		
D	2.50	58.0 60.0 64.0 N=9 (2,2/3,5,5,5)	3			3.05	11.22		
D	2.50	36.0 38.0 42.0 N=7 (1,1/2,1,2,2)	4			4.45	9.82		
D	2.50	N=18 (2,2/3,5,5,5)	5	Firm low to medium strength greyish brown slightly sandy silty thin to thickly laminated CLAY of high plasticity (field assessment).		5.00	9.27		
				Stiff greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.					
				End of Borehole at 5.00m		5.00	9.27		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.27m AOD		Fig No. WS51	
						Easting: 453493.68			
						Northing: 452073.84			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS52 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 23/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES	0.10	N=12 (2,2/3,3,3,3)		TOPSOIL: Brown slightly sandy CLAY.			0.20	13.79		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).						
				Stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.						
D	1.80	N=9 (2,2/2,2,2,3)	1	<i>Becomes silty and thickly laminated.</i>			0.60	13.39		
D	3.80	N=7 (2,1/2,1,2,2)	3	Firm low strength greyish brown slightly sandy silty thin to thickly laminated CLAY of high plasticity (field assessment).			3.00	10.99		
D	3.80	N=7 (1,1/1,2,2,2)	4	Stiff medium strength greyish brown sandy slightly gravelly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone, quartz and limestone.			3.40	10.59		
		N=12 (2,1/3,2,3,4)	5	End of Borehole at 5.00m			5.00	8.99		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 13.99m AOD		Fig No. WS52	
							Easting: 453435.11			
							Northing: 452187.97			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS53 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 23/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	1.50	50.0 56.0 58.0 N=8 (1,1/2,2,2,2)	1	TOPSOIL: Brown slightly sandy CLAY.		0.15	13.89		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff low to medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.					
D	2.50	30.0 36.0 48.0 N=10 (2,1/2,2,3,3)	2	<i>Becomes thickly laminated with rare sand lenses.</i>		0.40	13.64		
				Firm to stiff low to high strength greyish brown mottled reddish brown slightly sandy silty CLAY of high plasticity (field assessment).					
D	4.50	64.0 70.0 78.0 N=6 (1,2/1,2,1,2)	3			2.00	12.04		
D		26.0 32.0 38.0 N=8 (2,1/2,2,2,2)	4			4.90	9.14		
				Stiff greyish brown sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone and quartz.					
				End of Borehole at 5.00m		5.00	9.04		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Groundwater monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.04m AOD		Fig No.	
						Easting: 453409.92		WS53	
						Northing: 452278.16			















				DRAFT WINDOW SAMPLING RECORD			BH No. WS55 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 23/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	1.70	N=8 (2,2/2,2,2,2) 72.0 74.0 84.0 N=10 (2,1/2,2,3,3)	1	TOPSOIL: Brown slightly sandy CLAY.		0.20	13.88		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff medium to high strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.		0.70	13.38		
D	4.80	N=8 (2,2/2,2,2,2) 38.0 48.0 58.0 N=8 (2,2/2,2,2,2) N=6 (2,1/1,1,2,2)	3	Firm low to medium strength greyish brown mottled reddish brown and grey slightly sandy silty thinly laminated CLAY of high plasticity (field assessment).		2.35	11.73		
				Stiff greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone and quartz.		4.40	9.68		
		N=20 (3,4/5,5,5,5)	5	End of Borehole at 5.00m		5.00	9.08		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.08m AOD		Fig No. WS55	
						Easting: 453234.27			
						Northing: 452281.83			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS57 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 24/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
ES	0.30			TOPSOIL: Dark brown slightly sandy CLAY.		0.20 0.40	13.95 13.75		
				Firm grey mottled orangish brown sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.					
D	1.80	N=11 (2,2/2,3,3,3)	1	Becomes silty and thickly laminated.					
D	2.80	N=9 (2,2/2,2,2,3)	2						
D		N=9 (2,2/2,2,2,3)	3	Firm low to medium strength greyish brown mottled reddish brown and grey slightly sandy slightly gravelly silty CLAY of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone.		3.00	11.15		
		N=6 (1,1/1,1,2,2)	4	Becomes sandy.					
		N=11 (2,3/2,3,3,3)	5	Stiff medium strength greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone and quartz.		4.30	9.85		
				End of Borehole at 5.00m		5.00	9.15		
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.15m AOD		Fig No. WS57	
						Easting: 453136.95			
						Northing: 452186.40			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS58 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 24/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC		
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well	
D	1.50	58.0 60.0 66.0 N=10 (2,2/2,2,3,3)	1	TOPSOIL: Brown slightly sandy CLAY.						
				Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).		0.25	13.94			
				Stiff medium to high strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.		0.45	13.74			
D	2.90	78.0 82.0 88.0 N=10 (2,1/2,2,3,3)	2	<i>Becomes silty and thickly laminated.</i>						
										
D	4.80	66.0 74.0 74.0 N=9 (2,2/2,2,2,3)	3	Firm to stiff medium to high strength greyish brown mottled reddish brown and grey slightly sandy slightly gravelly silty CLAY of high plasticity (field assessment). Gravel is subangular to subrounded fine to medium of sandstone and quartz.		2.70	11.48			
										
D	4.80	N=19 (1,2/6,5,4,4)	4							
										
D	4.80	N=30 (4,6/7,7,8,8)	5	Stiff greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone and quartz.		4.50	9.68			
										
				End of Borehole at 5.00m		5.00	9.18			
										
Remarks and Groundwater Observations:						GL (m AOD) 14.18m AOD		Fig No. WS58		
1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						Easting: 453148.17				
						Northing: 452281.80				

				DRAFT WINDOW SAMPLING RECORD			BH No. WS59 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 24/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground-water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES	0.10			TOPSOIL: Brown slightly sandy CLAY.						
				Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).			0.20	14.08		
				Stiff medium strength grey mottled reddish brown slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to medium of sandstone and limestone. Rare sand lenses noted.			0.40	13.88		
D	0.90	N=10 (2,2/2,2,3,3)	1							
D	3.50	N=10 (2,3/2,2,3,3)	2	Becomes silty and thin to thickly laminated.						
D	3.50	58.0 64.0 68.0	3	High plasticity.						
D	3.50	N=10 (2,2/2,3,2,3)	4							
D	3.50	38.0 42.0 50.0 N=11 (1,1/2,3,3,3)	4	Stiff low to medium strength greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone and quartz.			3.80	10.48		
D	3.50	N=18 (2,1/2,2,7,7)	5							
				End of Borehole at 5.00m			5.00	9.28		
Remarks and Groundwater Observations:							GL (m AOD) 14.28m AOD		Fig No.	
1. Groundwater encountered at 4.00m bgl. 2. Monitoring well installed as detailed above. 3. Coordinates and elevations obtained using survey grade GPS.							Easting:		WS59	
							453052.81			
							Northing:			
							452281.87			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS60 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 24/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	1.80	60.0 60.0 68.0 N=14 (1,2/5,3,3,3)	1	TOPSOIL: Brown slightly sandy CLAY.		0.20	14.23		
				Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff medium to high strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subrounded fine to coarse of sandstone and limestone.		0.60	13.83		
<i>Becomes silty and thickly laminated.</i>									
D	2.50	102.0 58.0 70.0 N=8 (2,1/1,2,2,3)	2	Reddish brown silty SAND. Sand is fine to medium.		2.00	12.43		
				Firm medium strength grey mottled greyish brown sandy slightly clayey SILT of of medium plasticity (field assessment).		2.20	12.23		
				Firm very low to low strength greyish brown sandy silty CLAY of medium plasticity (field assessment).		2.60	11.83		
D	3.80	12.0 20.0 22.0 N=0 (0,0/0,0,0,0)	3	Very loose to loose reddish brown silty SAND. Sand is fine to medium.		3.00	11.43		
D		N=6 (2,1/1,1,2,2)	4						
D		N=9 (2,1/1,2,2,4)	5						
End of Borehole at 5.00m						5.00	9.43		
Remarks and Groundwater Observations: 1. Groundwater from 2.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.43m AOD		Fig No. WS60	
						Easting: 452956.19			
						Northing: 452282.11			



				DRAFT WINDOW SAMPLING RECORD			BH No. WS62 Sheet 1 of 1		
				Site: Hessay, York			Contract No: C10738		
				Client: Hessay Solar Limited			Date: 24/04/2026		
				Method: Tracked window sampling rig.			Scale: 1:25		
SAMPLE DETAILS				STRATA RECORD		Logged By: CA		Checked By: AEC	
				Driller: RP Drilling					
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description		Depth (m)	Level (m AOD)	Legend	Well
D	0.90	N=11 (2,2/3,2,3,3)	1	TOPSOIL: Brown slightly sandy CLAY.		0.20	14.01		
				Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).					
				Stiff low to high strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subangular fine to coarse of sandstone and limestone.					
				<i>Becomes silty and thin to thickly laminated.</i>		0.50	13.71		
		60.0 74.0 80.0 N=8 (2,2/2,2,2,2)	2						
				<i>High plasticity.</i>					
		38.0 40.0 44.0 N=7 (2,1/1,2,2,2)	3						
D	3.60								
		N=6 (1,1/1,1,2,2)	4	Firm to stiff low to medium strength greyish brown sandy slightly gravelly slightly silty CLAY of low plasticity (field assessment). Gravel is subangular to subrounded fine to coarse of sandstone and quartz.		3.90	10.31		
		N=11 (2,3/2,3,3,3)	5	End of Borehole at 5.00m		5.00	9.21		
Remarks and Groundwater Observations: 1. Groundwater from 4.00m bgl. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.						GL (m AOD) 14.21m AOD		Fig No. WS62	
						Easting: 453053.31			
						Northing: 452371.61			

				DRAFT WINDOW SAMPLING RECORD			BH No. WS63 Sheet 1 of 1			
				Site: Hessay, York			Contract No: C10738			
				Client: Hessay Solar Limited			Date: 27/04/2026			
				Method: Tracked window sampling rig.			Scale: 1:25			
SAMPLE DETAILS				STRATA RECORD			Logged By: CA		Checked By: AEC	
				Driller: RP Drilling						
Type	Depth From - To(m)	SPT (N), (ppm), Vane Result (kN/m2)	Ground- water	Description			Depth (m)	Level (m AOD)	Legend	Well
ES D	0.30 0.40	52.0 56.0 64.0 N=7 (2,1/1,2,2,2)	1	TOPSOIL: Brown slightly sandy CLAY.			0.20	13.91		
	Firm grey mottled orangish brown slightly sandy slightly silty CLAY of medium plasticity (field assessment).									
D	1.80	N=7 (2,1/2,1,2,2)	2	Stiff low to medium strength reddish brown mottled grey slightly sandy slightly gravelly slightly silty CLAY of medium plasticity (field assessment). Gravel is angular to subangular fine to coarse of sandstone and limestone. <i>Becomes thickly laminated.</i>			0.70	13.41		
				<i>Becomes silty and high plasticity.</i>						
D	3.60	N=6 (1,1/1,2,1,2) N=8 (2,1/2,2,2,2) N=16 (2,2/3,4,4,5)	3	Firm to stiff low to medium strength greyish brown mottled grey slightly sandy silty CLAY of high plasticity (field assessment).			3.00	11.11		
D			4							
D			5				5.00	9.11		
				End of Borehole at 5.00m						
Remarks and Groundwater Observations: 1. No groundwater encountered. 2. Backfilled with arisings upon completion. 3. Coordinates and elevations obtained using survey grade GPS.							GL (m AOD) 14.11m AOD		Fig No. WS63	
							Easting: 453150.57			
							Northing: 452367.53			