

LDController***.exe

Installation



Copy two files to any folder in PC. These programs uses .NET Framework 4.0 or more.

LDControllerXX.exe (XX : version number)

tmHIDLD.dll


Running

Run LDControllerXX.exe.

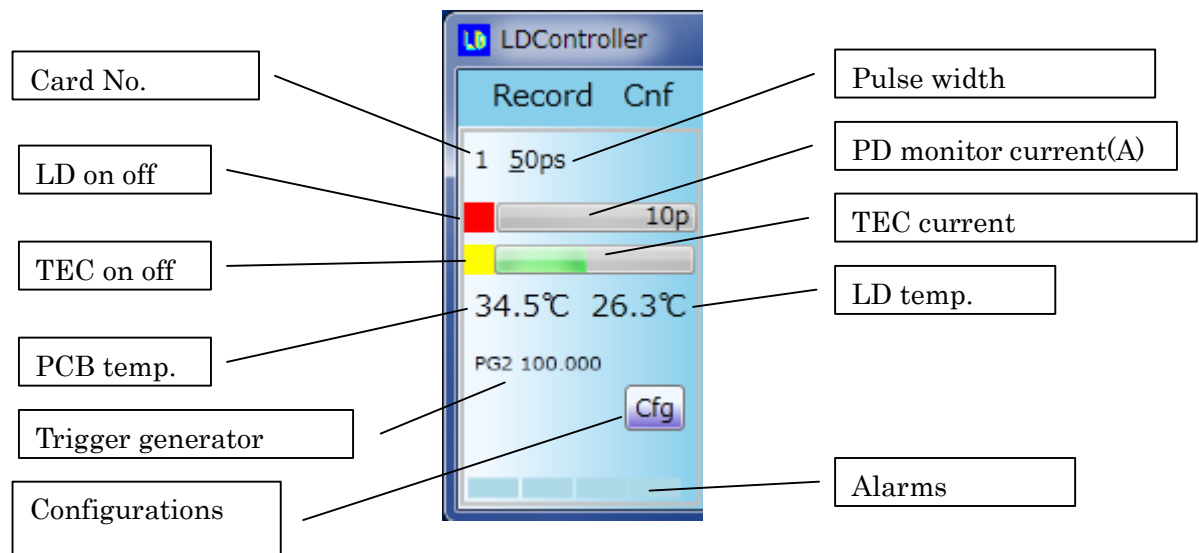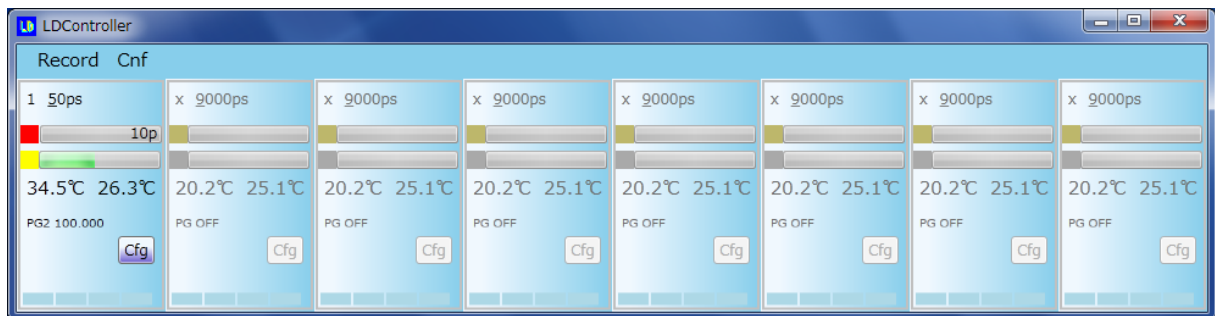


Window size is resizable.


Menus

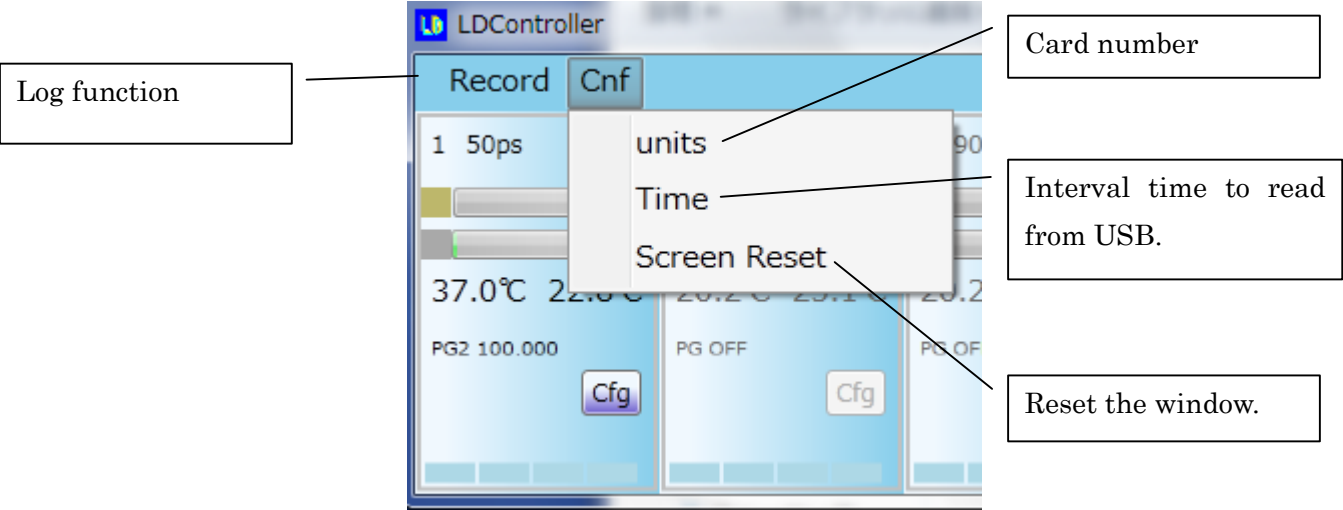

Serial number window


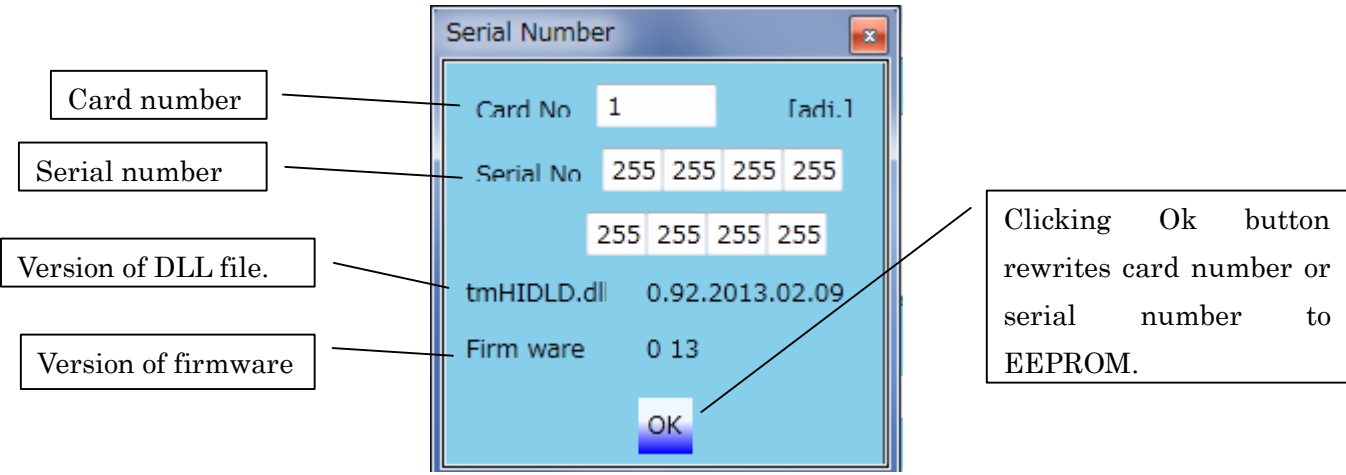


Pulse width window

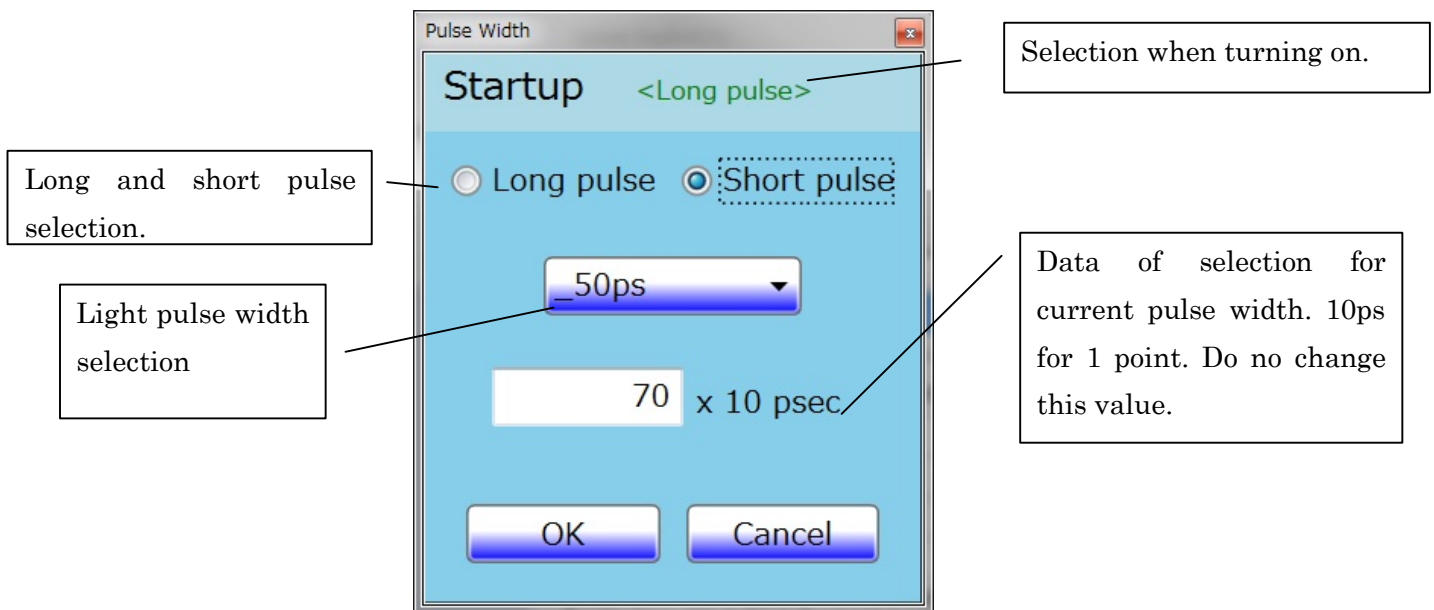


Note: Please turn light off when changing long and short selection.

What is difference between short pulse and long pulse? The short pulse always has same pulse width configured in pulse width window above. A pulse width of the long pulse is same as trigger pulse.

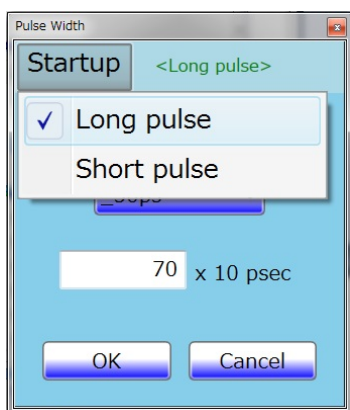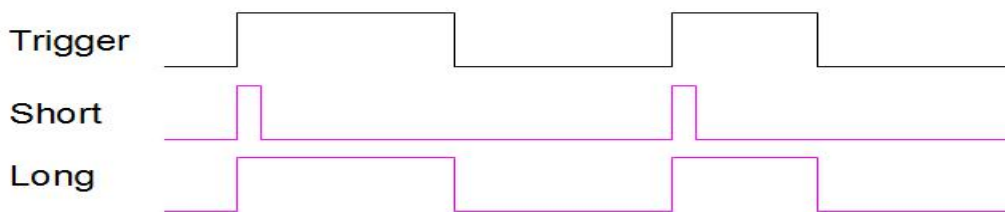


Which is selected in short and long pulse mode when the power is on is selected by startup menu.


Pattern generator window

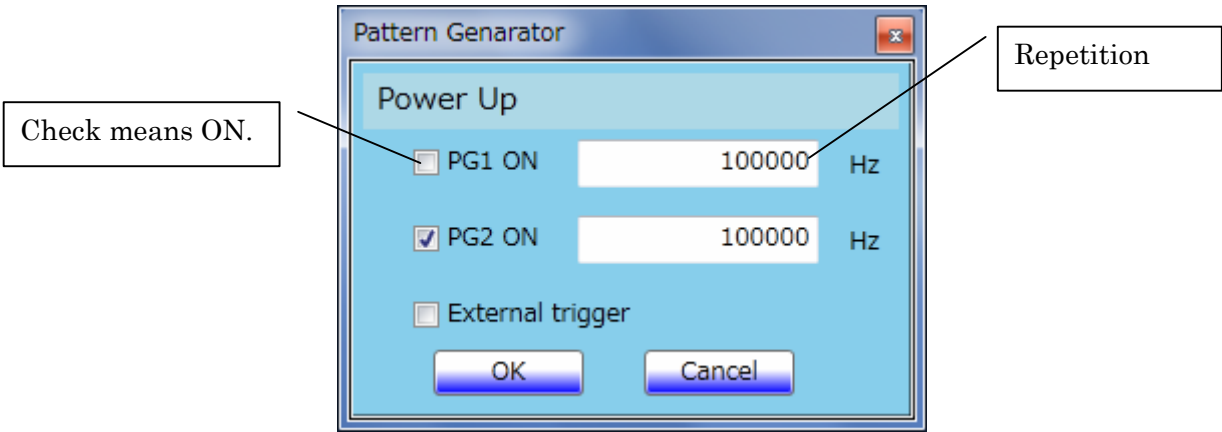

Selecting pattern generator status when turning on.

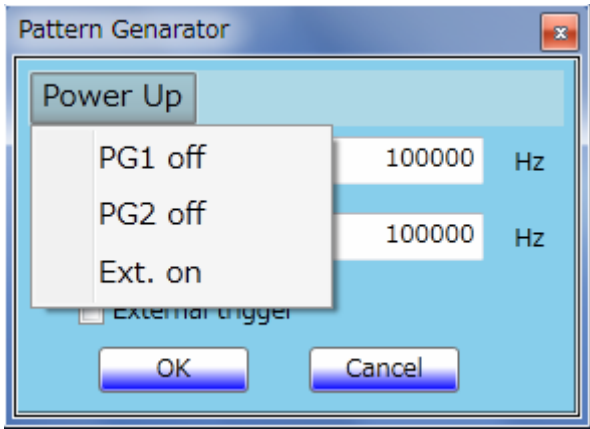

Configuration window

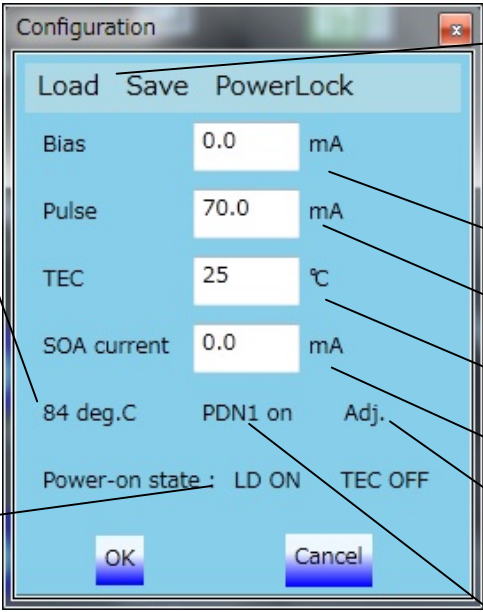

Load and Save EEPROM data with text file.

Bias current (See next page)

Pulse current (See next page)

LD temperature configuration

SOA current (No connection)


Automatic pulse current adjustment from repetition.

Power down mode. Off means power down.

Heater temperature of current pulse width IC.

LD and TEC state when turning on.

Recording window

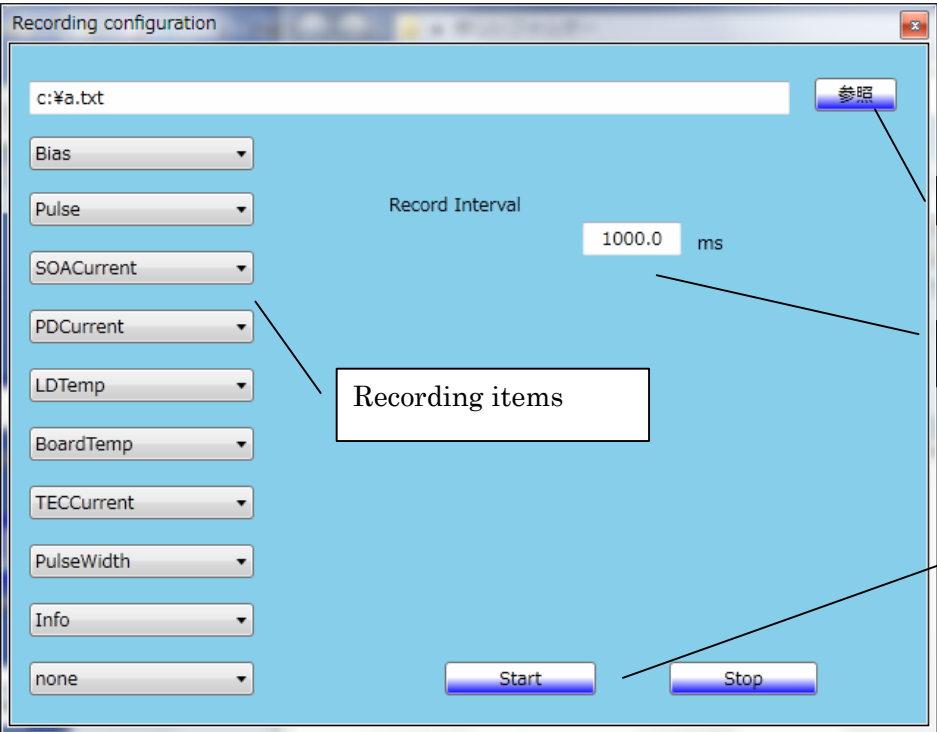

File selection

Recording interval time.


Start and Stop recording

Recording items

Bias and Pulse current

When LD is on the total current is bias current plus pulse current.

Bias current --- When LD is on the LD always carrying bias current. This can be used for CW light. A bias current value must be chosen from CW output characteristics in inspection sheet.

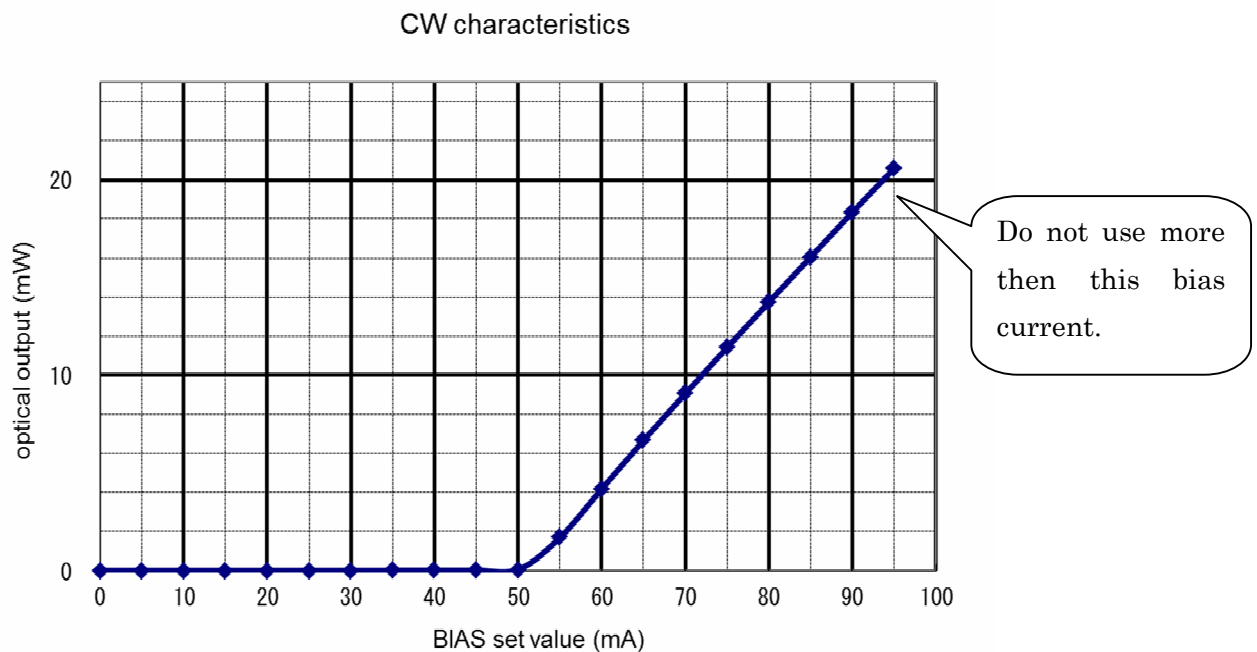

Pulse current --- When LD is on the LD carrying pulse plus bias current only period of configured pulse width started by trigger high edge.

Recording text format

A format of recording file is below. Data is appended to same file when start button is clicked.

```
time, Bias (0) , Pulse (0) , SOACurrent (0) , PDCurrent (0) , LDTemp (0) , BoardTemp (0) , TECCurrent (0) , PulseWidth (0) , Info (0)
2013/02/18 14:05:17, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31, 16. 668, 0, 48
2013/02/18 14:05:19, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31, 16. 668, 0, 48
2013/02/18 14:05:20, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31, 16. 668, 0, 48
2013/02/18 14:05:21, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31, 16. 668, 0, 48
2013/02/18 14:05:22, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31. 5, 16. 668, 0, 48
2013/02/18 14:05:23, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31. 5, 16. 668, 0, 48
2013/02/18 14:05:24, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31. 5, 16. 668, 0, 48
2013/02/18 14:05:25, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31. 5, 16. 668, 0, 48
2013/02/18 14:05:26, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 31. 5, 16. 668, 0, 48
*** End ***
time, Bias (0) , Pulse (0) , SOACurrent (0) , PDCurrent (0) , LDTemp (0) , BoardTemp (0) , TECCurrent (0) , PulseWidth (0) , Info (0)
2013/02/18 14:06:05, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 21392, 33. 5, 16. 668, 0, 48
2013/02/18 14:06:06, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 2628, 33. 5, 16. 668, 0, 48
2013/02/18 14:06:07, 30. 00733, 80. 01954, 0. 1000244, 0. 008955744, 21. 2628, 33. 5, 16. 668, 0, 48
*** End ***
```

Info

Bit0. . . no use

Bit1. . . no use

Bit2. . . 1: LD On 0: LD Off

Bit3. . . 1: TEC On 0: TEC Off

Bit4. . . 1: LD switch of PCB is on 0: Off

Bit5. . . 1: TEC switch of PCB is on. 0: Off