

First Officer / Pilot Monitoring Documentation

Document info:

Doc. Revision: Rev 1

Plugin Version: V1.0 Main Release

Hello there, this document will show you how to use the FO/PM plugin and how to interact with the UI.

¡DISCLAIMER!: This plugin is developed for the Toliss A319, A320, A20N, A321 and A21N only (For now). You need to have the latest version of FlyWithLua installed on your sim. For installation instructions and file configuration please read the "README" file, this file is only for explain how to use the plugin.

///// Commands /////

There are 6 main commands to interact with the FO, you need to assign a key from your keyboard and you can find them in the Xplane's settings menu/Keyboard/Toliss_A32S_FO

- Confirm validation for checklist (Response Check)
- Command Flaps 1 Position Down
- Command Flaps 1 Position Up
- Command Gear Down
- Command Gear Up
- Toggle FO interface (Show/Hide)

///// UI Presentation /////

The UI is a Float Window that appears in your sim when its open by the command or macro

In the UI you will find 3 main pages: "Main", "Settings" and "Briefing", all 3 pages are divided in sections separated by a grey line.




Main Page:

1st Section: Buttons to change between pages, and there is an X square for check the checklist items to advance.

2nd Section: Current flight phase

3rd Section: Available Checklist

4rd Section: Available Procedures

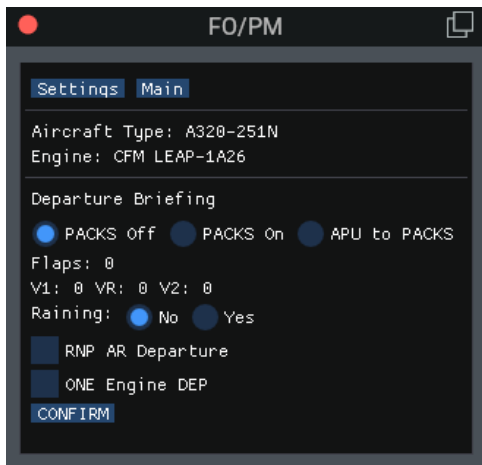


Briefing page:

1st Section: Buttons to change between pages

2nd Section: ACF info (Only on departure)

3rd Section: Available briefing config

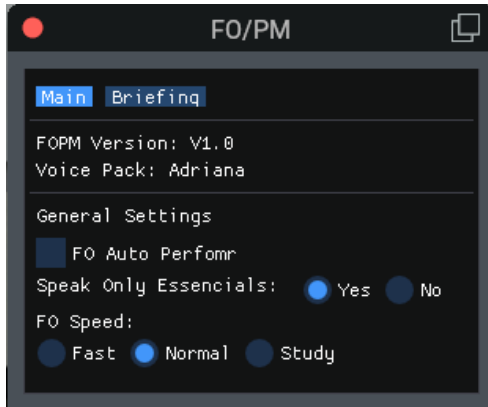

Settings page:

1st Section: Buttons to change between pages

2nd Section: Plugin version and loaded voice pack name

3rd Section: Settings config

///// UI Features /////

You can move and adjust the window at your discretion, the system will recognize the current position to adjust the size automatically when you change between the pages and save it when you close it with the command.

¡DISCLAIMER! It's highly recommended to close the window with the command and not with the red button, that's because the system will not save the position when you close it with the button and when you try to open it again, its position will be lost, causing it to reset to default position.

///// Controls /////

This is a Phase-Based Plugin, depending on the flight phase, you can see it in the "Main" page, the system will trigger some procedures and activate or deactivate the option to command procedures and checklist. All the available checklist and procedures are controlled in the "Main" page by using the buttons to tell the FO to perform them.

The standby phase is the "Preflight", in here the FO will be on standby and will not perform or read any control or situation of the airplane. To initiate or to wake up the FO, you need to perform the "Preliminary Cockpit Prep" procedure.

¡WARNING! If you pushback without the Preliminary Cockpit preparation, the FO will be on Standby all the flight.

The available checklist depends on the flight phase and the previous performed checklist and procedures, all starts via a command button except for one under a specific condition.

Available Checklist:

- Before Start checklist
- Before Start checklist below the line
- After Start checklist (auto when performing one engine taxi departure)
- Before Takeoff
- Before Takeoff below the line
- After Takeoff checklist
- Climb checklist
- Approach checklist
- Landing checklist
- After Landing checklist
- Parking checklist
- Securing checklist

The available procedures depend on the flight phase and the previous performed procedures and checklists, some are automatic and others are triggered by a command button

Available Procedures:

- Preliminary Cockpit Preparation (Command)
- After Start Procedure (Auto)
- Before Takeoff / Taxi Procedure (Command)
- Enter Runway (Command)
- Exit Runway (Command)
- Takeoff Procedure (Auto)
- Clean up procedure (Auto if "FO Autoperform" is on)
- 10000ft Climb Procedure (Command / Auto if "FO Autoperform" is on)
- 10000ft Descend Procedure (Command / Auto if "FO Autoperform" is on)
- AP Disengage (Auto when AP is disconnected)
- GO-Around Procedure (Auto)
- After Landing Procedure (Auto)
- Parking Procedure (Auto)

There are two supplementary procedures available:

- One engine taxi departure procedure (Auto, but engine 2 start is trigger by command)
- One engine taxi arrival procedure (Command)

///// Briefing /////

The "Briefing" page is very simple, in the second section are the available configuration for briefing, there are two "sub-pages" depending on the flight phase, departure and arrival briefing, in both you can set the parameters and/or acf configuration for the situation.

///// Settings /////

There are 3 main settings:

- FO Auto Perform (Yes/No)

Enable the FO to autoperform procedures such as gear retraction, Flaps retraction (Clean up procedure), 10000 ft climb and descend procedure (executed at 14000ft by default to comply with high altitude airports).

- Speak Only Essentials (Yes/No)

If yes, the FO will say only the callouts that are mandatory by SOP, if no, the FO will say all the movements.

- FO Speed

This is the speed at which the FO will perform the procedures, there are 3 possible speeds:

- Fast: 0.6s between steps.
- Normal: 0.85s between steps.
- Study: 1.1s between steps (Set the "Speak Only Essentials" to "No")

The study speed is designed for pilots who want to understand the flows of the ACF, giving them time to observe the movements of the FO.

All your settings will save automatically every time you change it.

///// Limitations /////

In addition to being exclusive to the ToLiss Airbus family, there are two technical limitations you should be aware of:

- FO Baro Reference: Due to a bug in the aircraft's (ACF) internal datarefs, you must manually set the QNH on all barometric selectors (Captain, FO, and ISIS). If left unaligned while the feature is active, the QNH values may glitch and lock/stack at 1013 hPa. I am actively researching a workaround for this.
- A321 Center Tank Fuel Pumps: Due to a limitation within the ToLiss system logic, the commands for the Center Tank (CTR TK) Fuel Pump Push Buttons are not externally linked/exposed. Consequently, when flying the A321 and A21N variants, the FO will not be able to automatically turn off the center fuel pumps; this action must be done manually by the pilot.
- External Hardware Conflicts: If you use physical cockpit hardware (like dedicated landing gear or flaps levers), you might experience synchronization issues where the FO's actions clash with your physical lever positions. Please note that standard flight controls—such as joysticks, thrust levers, and speed brake levers—will function perfectly and do not cause any conflicts.

Thats it, enjoy your flights with your FO.

Best Regards: Admiral Skippie