

Toward Interaction Dynamics: A Predictive Framework for Safe Physical Human–Robot Interaction

Yongyan Cao¹ and Jinshan Tang²

Abstract—Safe physical human–robot interaction (pHRI) requires tracking a commanded motion, yielding under human forces, respecting actuator and joint limits, and staying predictable under persistent contact. Classical impedance control trades accuracy for safety: a sustained force produces the steady-state bias $e_\infty = -K_d^{-1}F_h$. We propose a predictive framework that models the interaction error itself: an operational-space feedforward cancels gravity and Coriolis terms and normalizes the task inertia, leaving a linear interaction-dynamics backbone — a double-integrator reduction of the interaction error — whose state-transition matrix is configuration-independent. This converts nonlinear torque-controlled pHRI into a linear constrained-control problem: offset-free tracking, actuator feasibility, quadratic stabilizability over a certified polytope of configurations, and sampled-data joint-limit safety follow from a 30-variable convex QP at 100 Hz with a Kalman filter that rejects persistent forces without steady-state error. In MuJoCo simulation of a 7-DOF Franka FR3, it reduces steady-state error under a sustained 15 N force from 44.8 mm to below 0.05 mm, holds sub-millimeter tracking on four 3-D circles, and is robust to position-measurement noise and up to 30% inertial mismatch. Because the backbone reduces contact to a linear model with a fixed transition matrix, it may serve as a dynamics prior for model-based physical AI.

Index Terms—Interaction dynamics, impedance control, model predictive control, physical human–robot interaction, disturbance rejection, joint-limit safety, redundant manipulator.

I. INTRODUCTION

Robots are moving from structured, isolated workcells into continuous physical contact with people and unstructured environments—collaborative assembly, assistive and rehabilitation devices, surgical robots, and service robots all require the machine to stay safe and predictable while executing a precise task [1]–[3]. In these settings the quality of the physical interaction is not a secondary concern but a primary control objective.

Classical robot control is organized around *robot* dynamics: trajectory tracking, inverse dynamics, and whole-body control take the manipulator as the principal dynamical system and treat contact forces as external disturbances or constraints [4]. This is highly effective in free space but becomes restrictive once interaction dominates behavior, because the object the controller reasons about—the robot’s configuration-space dynamics—is not the object the task cares about, namely

the *interaction* at the contact port. This motivates a shift in modeling emphasis: rather than predict robot motion and react to interaction, we make the *interaction dynamics*—the closed-loop relation among commanded motion, contact force, actuator and joint limits, and safety filters at the contact port—the quantity that is explicitly modeled, predicted, and optimized (formalized in Definition 1). We use the term in a deliberately specific modeling sense—the augmented error-and-force state at the contact port taken as the object of prediction and constraint—not as a claim to a new physical phenomenon; it is closely related to the operational-space and error-dynamics formulations [4], [5] and differs from them in *what is treated as the modeled state* (the interaction error, not the configuration) rather than in the underlying mechanics. This paper develops one concrete, offset-free predictive realization of it.

Impedance and admittance control are the dominant pHRI paradigms [6], [7]: they prescribe a desired dynamic relation between motion and contact force and are valued for their simplicity and physical transparency [1], [2]. Two limitations persist. First, they are fundamentally *reactive*—the desired port behavior is enforced by feedback after the force acts, and a fixed stiffness fixes the accuracy–safety trade-off: under a sustained force the steady-state deflection is $e_\infty = -K_d^{-1}F_h$ (a 15 N push through 300 N/m gives 50 mm), so stiffening for accuracy raises contact force [3] while integral action removes the bias only within a narrow stable-gain budget and is prone to windup [8], [9]. Second, task tracking, interaction shaping, and constraints are typically designed in separate modules, precluding a single optimization.

Model predictive control (MPC) addresses the second gap by folding constraints, actuator limits, and future prediction into one optimization [10], [11], and offset-free MPC removes steady-state error by augmenting an integrating disturbance state estimated by a Kalman filter [12]. Yet most impedance-MPC formulations either optimize impedance *parameters*—which enter the prediction nonlinearly and cap update rates at 10–30 Hz [13]–[15]—or compensate the estimated disturbance only reactively at the current step [16]. Variable impedance methods [17], [18] adapt the apparent stiffness but likewise give no offset-free guarantee under persistent unknown force. What is missing is a formulation in which the interaction error itself is the linear dynamical object exposed to standard constrained-control machinery.

Our hypothesis is that safe interaction is best posed on a predictive representation of the interaction error, in which

¹Y. Cao is with Voryx Robotics LLC, San Jose, CA 95136, USA (e-mail: yongyancao@gmail.com).

²J. Tang is with the Department of Health Administration and Policy, George Mason University, Fairfax, VA, USA (e-mail: jtang25@gmu.edu).

impedance behavior is not a separate controller but an emergent property of the optimized dynamics. Computed-torque and operational-space linearization to a double integrator are classical [4], [5]; the contribution here is to make that reduction the *backbone* of the predictive interaction problem. An operational-space feedforward cancels gravity and Coriolis terms and normalizes the task through the operational-space inertia, leaving a residual task-error double integrator whose discrete state-transition matrix A_d is *constant*, with all robot configuration dependence isolated in the input matrix $B_d(\rho_k)$ —the scheduling-dependent structure familiar from LPV predictive control [19].

This paper makes four contributions:

A predictive interaction-dynamics formulation. We recast torque-controlled pHRI so that the modeled and optimized object is the interaction error at the contact port rather than the robot configuration dynamics, unifying compliance, tracking, disturbance rejection, and safety in one convex program while preserving the measured robot dynamics through M , $C\dot{q} + G$, and J_v .

A configuration-independent state-transition matrix. Operational-space feedforward cancellation makes the discrete transition matrix A_d *constant* across all configurations, confining the entire robot dependence to the input (control-effectiveness) matrix $B_d(\rho_k)$ —the classical LPV structure in which A is fixed and only B is scheduled. This lets the free-response matrix be precomputed once, keeps the online problem a fixed 30-variable QP at 100Hz at every configuration, and reduces the LPV backbone’s closed-loop stability to a finite vertex LMI certifying quadratic stabilizability, by one fixed feedback gain, over a polytope of configurations (Theorem 3) rather than only at a frozen configuration — a statement about the backbone under that certified gain, not directly about the deployed receding-horizon MPC.

Offset-free predictive impedance. We prove (Theorem 1) that classical task-space impedance [6] is a *special case* of this framework—in the unconstrained, disturbance-free limit the predictive feedback reduces to it for the passive symmetric component of the realized gain—and (Theorem 2) that an input-centered augmented-Kalman disturbance state gives zero steady-state error under constant bounded human force when the stated stability and feasibility conditions hold, removing the fixed accuracy–safety trade-off of impedance control.

Safety and passivity integration. A null-space inverse-barrier potential [20], a one-step joint-limit control-barrier filter on the final applied torque, and an energy-tank scaling of the predictive task force provide practical joint-limit regulation and sampled task-channel passivity, *conditional* on feasibility and per-sample enforcement.

On a 7-DOF Franka FR3 in MuJoCo simulation, the controller reduces steady-state error under a sustained 15 N force from 44.8 mm (classical impedance) to below 0.05 mm—a $>800\times$ reduction—while holding sub-millimeter tracking on four 3-D circles and remaining robust to position-measurement noise and up to 30% inertial mismatch. Although developed for pHRI, the interaction-dynamics backbone requires only M , $C\dot{q} + G$, and J_v , offering a path toward interaction models that transfer across configurations for manipulation and whole-

body control; a full realization of that vision is left to future work.

The same analytic reduction points toward an interaction-dynamics prior for *model-based physical AI*; we return to this in the conclusion rather than claim it here.

II. SYSTEM DYNAMICS AND PROBLEM FORMULATION

Consider an n -DOF torque-controlled serial manipulator; experiments use the Franka FR3 ($n = 7$) [21]. The rigid-body equations of motion are:

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h \quad (1)$$

where $M(q)$ is the positive-definite inertia matrix; $C(q, \dot{q})\dot{q} + G(q)$ is the Coriolis-plus-gravity vector (available as `qfrc_bias` in MuJoCo or via the robot model API); τ is the commanded joint torque; and $\mathcal{F}_h \in \mathbb{R}^6$ is the human-applied wrench. $J(q) = [J_v^\top(q); J_\omega^\top(q)]^\top \in \mathbb{R}^{6 \times n}$ is the full geometric Jacobian, with $J_v \in \mathbb{R}^{3 \times n}$ the translational and $J_\omega \in \mathbb{R}^{3 \times n}$ the rotational sub-Jacobian [5]. $\mathcal{F}_h$ is defined as positive when the human pushes *onto* the robot, so it enters (1) with a positive sign, adding to the generalized force that accelerates the joints.

The translational Jacobian satisfies $\dot{p} = J_v(q)\dot{q}$ [5]. The operational-space inertia [4] is:

$$\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1} \in \mathbb{R}^{3 \times 3} \quad (2)$$

$\Lambda(q)$ is symmetric positive-definite. The dynamically-consistent pseudoinverse [4], [22] is $\bar{J}_v = M^{-1} J_v^\top \Lambda$, ensuring forces applied through $J_v^\top$ produce no null-space acceleration.

After feedforward cancellation (Section III-A), the human force and joint friction appear as an aggregated Cartesian *acceleration* disturbance $d_{\text{acc}}(t)$ (units m/s^2 — kept notationally distinct throughout from its *force*-equivalent d , units N, introduced in Section III-C and used from Layer 2 onward), modelled as a random walk:

$$\dot{d}_{\text{acc}} = w(t), \quad w \sim \mathcal{N}(0, Q_d) \quad (3)$$

capturing constant forces (sustained pushes, physiological tremor) and slow-varying loads (unmodelled payloads, tool changes). This decomposition is written in acceleration units; the estimator and QP of Section III-B operate on the equivalent *force-form* disturbance $-\Lambda(q)d$ (the quantity entering through $B_d(\rho_k)$ in (11)), which is constant for a constant human force and is the form realized in code.

Our control objective can be stated as follows. Design a torque law τ such that for any bounded persistent disturbance d :

- 1) $\|e(\infty)\| = 0$, where $e = p_d - p$ (zero steady-state error);
- 2) $\|e(t)\|$ is minimized over a finite prediction horizon;
- 3) $q_i \in [q_{\min,i} + \epsilon, q_{\max,i} - \epsilon]$ for all i when the one-step safety filter is enforced.

This objective is posed not on the robot configuration but on the interaction error at the contact port. We make that modeling shift precise.

Definition 1 (Interaction Dynamics). *We call interaction dynamics the closed-loop dynamical system whose state is the interaction error at the contact port—the task-tracking error and its rate, augmented by the persistent interaction force—and*

whose evolution, under the actuator, joint-limit, and passivity constraints, is driven by the task control input. Formally, where classical robot control takes the configuration-space dynamics (1) as the object to be predicted and regulated, interaction dynamics takes the augmented error system

$$x_{k+1} = A x_k + B u_k + E d_k$$

as the primary modeling object, with x_k the interaction error state, u_k the task force, and d_k the interaction disturbance.

What distinguishes this from a bare tracking-error double integrator is not the state equation in isolation but the object it defines: the error, the interaction force (as an estimated, internally-modeled disturbance state rather than an exogenous input), and the actuator, joint-limit, and passivity constraints are taken together as one predicted-and-optimized system. Plain error dynamics describe how a fixed controller's error evolves; the interaction dynamics of Definition 1 are the object the controller is designed on.

Section III-B constructs one concrete, offset-free realization of this object: the transition matrix $A = A_d$ is configuration-independent, the robot dependence is confined to $B = B_d(\rho_k)$, and E propagates the estimated interaction force. Modeling the interaction rather than the configuration is what lets compliance, tracking, disturbance rejection, and safety be posed as a single constrained optimization.

III. LINEAR INTERACTION-DYNAMICS BACKBONE AND FINITE-HORIZON REALIZATION

A. Layer 1 — Feedforward Nonlinear Inversion

Classical Cartesian impedance control [6] commands:

$$\tau = C\dot{q} + G + J_v^\top (\Lambda \ddot{p}_d + \mu - K_d e - D_d \dot{e})$$

where $\mu = \Lambda J_v M^{-1} C\dot{q} - \Lambda \dot{J}_v \dot{q}$ collects task-space Coriolis and centripetal terms [4], embedding the full impedance law inside a single static feedback. This treats F_h as a disturbance to be passively rejected with no predictive look-ahead and no mechanism to drive steady-state error to zero.

The proposed Layer 1 explicitly separates these concerns. Following the operational-space decomposition of [4], the full torque command is partitioned into four channels via the null-space projector $\bar{N} = I - \bar{J}J$ [22], where $\bar{J} = M^{-1}J^\top \Lambda_6$ is the dynamically-consistent pseudoinverse of the full 6-DOF pose Jacobian J and $\Lambda_6 = (JM^{-1}J^\top)^{-1} \in \mathbb{R}^{6 \times 6}$ is the full-pose operational-space inertia (both the translational MPC task and the orientation channel are actively controlled, so the projector annihilates the full pose task, not only its translational part):

$$\tau = \tau_{\text{ff}} + J_v^\top F_{\text{mpc}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}} \quad (4)$$

The feedforward term cancels all known nonlinearities using the computed-torque method [5]:

$$\tau_{\text{ff}} = \underbrace{C(q, \dot{q})\dot{q} + G(q)}_{\text{qfrcbias}} + J_v^\top \Lambda(q) \ddot{p}_d \quad (5)$$

Writing the Layer-2 task channel as $\tau_{\text{mpc}} \equiv J_v^\top F_{\text{mpc}}$, define the known non-MPC torque offset

$$\tau_{\text{base}} = \tau_{\text{ff}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}}.$$

The final applied command is the joint torque $\tau = \tau_{\text{base}} + \tau_{\text{mpc}}$, which the hardware saturates at the per-joint actuator limit

$|\tau_i| \leq \tau_{\text{max},i}$; Layer 2 constrains this applied receding-horizon torque, while the hardware interface keeps clipping and rate limiting as final runtime guards.

Proposition 1. After applying (5), the residual error dynamics are represented by the linear double integrator

$$\ddot{e} = -\Lambda^{-1}(q) F_{\text{mpc}} + d_{\text{acc}}(t) \quad (6)$$

with $e = p_d - p$; every term left over from the feedforward cancellation — not just the human force — is collected into the acceleration-form disturbance $d_{\text{acc}}(t)$, defined below (not to be confused with its force-equivalent $d = -\Lambda(q)d_{\text{acc}}$, Section III-C, which is the quantity actually estimated and cancelled from Layer 2 onward):

$$d_{\text{acc}}(t) = \underbrace{-\Lambda^{-1}(q) \bar{J}_v^\top J^\top F_h}_{\text{projected pMRI force}} - \underbrace{J_v M^{-1} J_\omega^\top F_{\text{orient}}}_{\text{orientation coupling}} - \underbrace{\bar{J}_v(q, \dot{q})\dot{q}}_{\text{Jacobian derivative}} + \underbrace{\epsilon_m(t)}_{\text{model error}} \quad (7)$$

where $\bar{J}_v^\top = \Lambda J_v M^{-1} \in \mathbb{R}^{3 \times n}$ and $J^\top \in \mathbb{R}^{n \times 6}$ is the full geometric Jacobian transpose, so $\bar{J}_v^\top J^\top \in \mathbb{R}^{3 \times 6}$ acts on the 6-D wrench F_h (equivalently the term is $-J_v M^{-1} J^\top F_h$).

The four terms: (i) the *projected pMRI force* — for a purely translational $F_h = [F_h^\top, 0]^\top$ this reduces to $-\Lambda^{-1} F_h$ in acceleration form (because $e = p_d - p$, any positive acceleration of p induced by the human force appears with a negative sign in $\ddot{e}$); (ii) the *orientation coupling* — residual translational acceleration from the simple additive orientation PD. This mobility cross-term is generally structural, not a numerical artifact, and is, in its force-equivalent form, absorbed by $\hat{d}$; (iii) the *Jacobian derivative* $-\bar{J}_v \dot{q}$, small at typical speeds; (iv) the *model error* $\epsilon_m(t)$ from imperfect gravity/Coriolis cancellation.

Remark 1 (Exactness of the reduction). Under ideal cancellation the residual plant is exactly the double integrator (6); in practice the terms (ii)–(iv) are not identically zero. Rather than being neglected they are modelled as the acceleration disturbance $d_{\text{acc}}(t)$, whose force-equivalent $d = -\Lambda(q)d_{\text{acc}}$ the augmented Kalman state $\hat{d}$ estimates and the MPC rejects (Theorem 2). The reduction is thus a cancellation-plus-disturbance model, not an assumption of perfect inversion; the configuration dependence stays confined to $B_d(\rho_k)$ while A_d remains constant.

B. Layer 2 — Discrete LPV Model and QP

With error state $x_e = [e^\top, \dot{e}^\top]^\top \in \mathbb{R}^6$ and scheduling variable $\rho_k = q_k$, exact zero-order-hold (ZOH) discretization gives:

$$x_{e,k+1} = \underbrace{\begin{bmatrix} I_3 & \Delta t I_3 \\ 0 & I_3 \end{bmatrix}}_{A_d(\text{constant})} x_{e,k} + \underbrace{\begin{bmatrix} -\frac{\Delta t^2}{2} \Lambda^{-1}(q) \\ -\Lambda^{-1}(q) \Delta t \end{bmatrix}}_{B_d(\rho_k)} F_{\text{mpc},k} \quad (8)$$

Equation (8), together with the disturbance augmentation (11) below, is the interaction dynamics of Definition 1 in concrete form: the state x_e is the interaction error at the contact port—not the robot configuration—the input F_{mpc} is the task force, and $\hat{d}$ is the estimated interaction disturbance.

Identifying $A = A_d$ and $B = B_d(\rho_k)$ gives the linear system of Definition 1; offset-free tracking, actuator feasibility, and joint-limit safety are properties of this model, not of the configuration dynamics.

Structural result. The continuous-time matrix $A_c = \begin{bmatrix} 0 & I_3 \\ 0 & 0 \end{bmatrix}$ is nilpotent ($A_c^2 = 0$), so the matrix exponential terminates exactly at first order and $A_d = e^{A_c \Delta t} = I + A_c \Delta t$ is configuration-independent and exact, with no discretization approximation; the exact ZOH input integral $B_d(\rho_k)$ is likewise closed-form. The LPV pair $(A_d, B_d(\rho))$ is uniformly controllable, and the disturbance state augmented in Sec. III-C is detectable, at every configuration away from kinematic singularities (proof: supplementary material, Sec. S1, Remark S1).

Implementation note (regularization). In code $\Lambda^{-1}(q) = J_v M^{-1} J_v^\top + \sigma I$ with $\sigma = 10^{-6}$; this Tikhonov term is negligible in the workspace interior and only mildly damps the estimate near singularities, outside the operating region.

The receding-horizon QP with $N = 10$ steps, $3N = 30$ decision variables $U = [F_{\text{mpc},0}; \dots; F_{\text{mpc},N-1}]$, is:

$$\min_U \frac{1}{2} U^\top H U + h^\top U \quad (9a)$$

$$\text{s.t. } -\tau_{\max} \leq \tau_{\text{base}}(0) + J_v^\top(q_0) F_{\text{mpc},0} \leq \tau_{\max}, \quad (9b)$$

$$-F_{\max} \leq F_{\text{mpc},k} \leq F_{\max}, \quad k = 0, \dots, N-1. \quad (9c)$$

where $F_{\max}$ is the task-space (Cartesian) corrective-force bound on the QP's decision variable (distinct from the joint-torque limit $\tau_{\max}$), and $\tau_{\text{base}}(0) = \tau_{\text{ff}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}}$ is the known non-MPC torque offset at the current configuration (Sec. III-A). $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$, stage cost $Q = \text{blkdiag}(K_d, D_d)$, terminal cost $Q_f = \gamma Q$ ($\gamma = 5$), $\bar{Q} = \text{blkdiag}(Q, \dots, Q, Q_f)$, $\bar{R} = \text{blkdiag}(R, \dots, R)$. Let $d_N = \mathbf{1}_N \otimes \hat{d}$; the linear term is $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$, corresponding to the offset-free input-centred effort penalty $\|U + d_N\|_{\bar{R}}^2$. The free response $x_{\text{free}} = \Phi x_e + D_{\text{bar}} \hat{d}$, where $D_{\text{bar}} \in \mathbb{R}^{6N \times 3}$ has j -th block $\sum_{l=0}^{j-1} A_d^l B_d(\rho_k)$; equivalently, $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$. Only $F_{\text{mpc},0}$ is applied (receding-horizon principle). *Constraint interpretation (feasible final control).* The final applied command is the joint torque $\tau = \tau_{\text{base}} + J_v^\top F_{\text{mpc},0}$, where τ_{base} contains feedforward, orientation, and null-space terms, which the hardware saturates at the per-joint actuator limit $\tau_{\max}$ (on the FR3, $\tau_{\max} = [87, 87, 87, 87, 12, 12, 12]$ Nm). Constraining only the correction, $\|F_{\text{mpc}}\|_\infty \leq F_{\max}$, would *not* keep τ within $\tau_{\max}$: it ignores the feedforward offset τ_{ff} (both $C\dot{q} + G$ and the inertial term $J_v^\top \Lambda \ddot{p}_d$, which on the FR3 dominate the budget), and it bounds a Cartesian force whereas the map $J_v^\top(q)$ to joint torque is configuration-dependent; any deficit would be absorbed by a downstream torque clip, i.e. *saturation*, discarding the optimized command. We therefore constrain the first applied receding-horizon torque directly, as in (9b). Since $\tau_{\text{base}}(0)$ and $J_v(q_0)$ are known at solve time, the constraint is affine in $F_{\text{mpc},0}$ — a convex per-joint polytope solved by OSQP at the same cost class as a box. As only the first move is applied, the nominal applied torque satisfies $|\tau_i| \leq \tau_{\max,i}$ whenever the QP is feasible. Runtime clipping and rate limiting remain as final safety guards; horizon-wide torque rows can be added but are not required for feasibility

of the applied receding-horizon action. If an over-aggressive reference makes $\tau_{\text{base}}(0)$ alone exceed $\tau_{\max}$, the constraint could similarly be softened with a penalized slack $s \geq 0$ so the QP stays feasible and returns a minimum-violation command — analogous to the joint-limit CBF relaxation of Sec. IV-B, though the present implementation instead returns a zero correction on infeasibility (see the correction-authority ablation in the supplementary material, Sec. S8), which is simpler but not minimum-violation.

The following result establishes that classical impedance control is not a competitor to the proposed framework but a special case of it: it is what the interaction dynamics reduce to once prediction, constraints, and disturbance augmentation are switched off.

Theorem 1 (Impedance Equivalence). *Fix a configuration and assume the input constraints are inactive and the disturbance estimate is zero. Then the first MPC move is a linear state feedback $F_{\text{mpc}} = K_e e + K_{\dot{e}} \dot{e}$. If the realized gain blocks are symmetric positive definite, or more generally have symmetric parts that define passive stiffness and damping, set $K_{\text{eff}} = \text{sym}(K_e) \succ 0$ and $D_{\text{eff}} = \text{sym}(K_{\dot{e}}) \succ 0$; the conservative part of the closed loop is the classical task-space impedance:*

$$\Lambda(q) \ddot{e} + D_{\text{eff}} \dot{e} + K_{\text{eff}} e = -F_h, \quad (10)$$

where F_h is the constant force-equivalent disturbance applied to the end effector.

Proof. With inactive constraints and $\hat{d} = 0$, (9) reduces to an unconstrained strictly convex quadratic because $H = \Gamma^\top \bar{Q} \Gamma + \bar{R} \succ 0$ when $\bar{R} \succ 0$. Its unique minimizer is

$$U^* = -H^{-1} \Gamma^\top \bar{Q} \Phi x_e.$$

Let $S = [I_3 \ 0 \ \dots \ 0]$ select the first force block. The applied force is therefore

$$F_{\text{mpc}} = S U^* = \begin{bmatrix} K_e & K_{\dot{e}} \end{bmatrix} \begin{bmatrix} e \\ \dot{e} \end{bmatrix},$$

for fixed matrices $K_e, K_{\dot{e}}$ determined by $(A_d, B_d, \bar{Q}, \bar{R}, Q_f, N)$. Under the stated symmetry/sign condition, the symmetric parts define K_{eff} and D_{eff} . The exact linear closed loop is obtained with the full gains $K_e, K_{\dot{e}}$; only their symmetric parts admit the conservative spring-damper interpretation. The skew part of $K_{\dot{e}}$ is workless gyroscopic damping coupling, whereas the skew part of K_e is a circulatory position force and is not passive in general. These skew terms vanish in the common isotropic/commuting case and are otherwise treated as part of the stabilizing LQR feedback rather than as classical impedance parameters. The residual plant from Proposition 1 is $\ddot{e} = -\Lambda^{-1} F_{\text{mpc}} + d_{\text{acc}}$. For a translational constant human force represented in force form by $F_h = -\Lambda d_{\text{acc}}$, multiplication by Λ gives $\Lambda \ddot{e} = -F_{\text{mpc}} - F_h$. Substituting the linear feedback yields (10). $\square$

Thus the unconstrained MPC realizes a configuration-dependent linear impedance whenever the gain blocks have the passive stiffness/damping sign structure; constraints and disturbance augmentation are the mechanisms that extend this linear impedance behavior.

Remark 2 (Optimality vs. passivity: motivation for the energy tank). *Because the predictive gain is the LQR/Riccati image of (Q, R) rather than a passive design, the skew part of K_e (Theorem 1) is a non-passive circulatory force. For the robot alone this is benign (the DARE closed loop is asymptotically stable), but coupled to a human—itsself a dynamical system—a non-passive controller need not preserve stability of the coupled loop. This motivates the energy-tank layer of §IV-C: rather than restricting (Q, R) to passive gains and sacrificing performance, we keep the optimal law and restore a sampled energy-budget certificate on the scaled translational predictive-force channel at runtime (Proposition 2), bounding the positive work that channel can deliver. This is a channel-level certificate, not a full-port passivity proof (see the scope remark in §IV-C), so it does not by itself guarantee coupled stability against an arbitrary passive environment; it removes one identified non-passive source while leaving feedforward, orientation, and null-space contributions to the port outside its accounting.*

Remark 3 (Prescribed vs. realized gains). *The cost weights $Q = \text{blkdiag}(K_d, D_d)$, R are design penalties; the realized impedance $(K_{\text{eff}}, D_{\text{eff}})$ is their LQR image — a nonlinear (Riccati) map of (Q, R) — so in general $(K_{\text{eff}}, D_{\text{eff}}) \neq (K_d, D_d)$. The weights shape the realized impedance: the high-bandwidth tracking reported below corresponds to the stiff, well-damped K_{eff} the chosen (Q, R) induce. If a specific (K_d, D_d) must instead be matched exactly, the impedance gain can be prescribed directly ($F_{\text{mpc}} = K_d e + D_d \dot{e}$), rendering the equivalence exact for those gains at the cost of predictive look-ahead. We adopt the LQR form, for which Theorem 1 already establishes the analytical connection between the unconstrained MPC and a realized classical impedance.*

Corollary 1 (Existence of a Gain-Scheduled Infinite-Horizon Implementation). *The infinite-horizon MPC admits a pure state-feedback realization $F_{\text{mpc},k} = -K_\infty(\rho_k)x_{e,k}$. By the DARE detectability result established in the supplementary material (Sec. S1, Remark S1), the stabilizing DARE solution $P_\infty(\rho)$ exists for each fixed ρ under the stated detectability assumptions, and $K_\infty(\rho_k)$ depends on ρ_k only through $\Lambda^{-1}(q)$ — a symmetric 3×3 SPD matrix, so the scheduling space is the 6-D manifold of its independent entries. Since the stabilizing DARE solution is continuous in its coefficients, $K_\infty(\cdot)$ is continuous over this compact domain.*

Remark 4 (Practical 1 kHz implementation). *Continuity of K_∞ over a compact 6-D domain makes an offline-precomputed lookup attractive: the gain can be tabulated on a grid of $\Lambda^{-1}(q)$ values and interpolated, reducing the online cost to a single 3×6 matrix–vector product. We present this as a deployment option, not a validated result — grid density, interpolation error, and the resulting closed-loop quality are implementation choices we do not characterize here. The experiments instead run the finite-horizon QP (9) at 100 Hz with a 1 kHz inner loop, which also enforces the first applied torque constraint (9b) and exploits prediction look-ahead; a hardware demonstration of the 1 kHz law is future work.*

C. Kalman Disturbance Augmentation for Offset-Free Tracking

For the estimator we represent the disturbance in *force form*: the augmented state $d \in \mathbb{R}^3$ (units N) is the force-equivalent of the task-acceleration disturbance of the residual dynamics $\ddot{e} = -\Lambda^{-1}(q)F_{\text{mpc}} + d_{\text{acc}}$, related by $d = -\Lambda(q)d_{\text{acc}}$. This form enters the discrete model through the *same* input matrix $B_d(\rho_k)$ as the control F_{mpc} , and—unlike the acceleration form $d_{\text{acc}} = \Lambda^{-1}(q)(\cdot)$, which varies with configuration as $\Lambda(q)$ changes—it is constant for a constant human force, matching the constant-disturbance hypothesis of Theorem 2. It is the quantity the implementation stores as $\hat{d}$ and cancels via $F_{\text{mpc}} = -\hat{d}$ at steady state. Augment the state with this integrating disturbance, modelled as a random walk $d_{k+1} = d_k + w_k$:

$$\begin{bmatrix} x_{e,k+1} \\ d_{k+1} \end{bmatrix} = \underbrace{\begin{bmatrix} A_d & B_d(\rho_k) \\ 0 & I_3 \end{bmatrix}}_{A_{\text{aug}}} \begin{bmatrix} x_{e,k} \\ d_k \end{bmatrix} + \begin{bmatrix} B_d(\rho_k) \\ 0 \end{bmatrix} F_{\text{mpc},k} + \begin{bmatrix} 0 \\ w_k \end{bmatrix}, \quad (11)$$

with $w \sim \mathcal{N}(0, Q_w)$. The integrating block (eigenvalues at 1) delivers offset-free rejection of constant disturbances by the internal-model principle, while the process noise w lets the filter track slowly-varying disturbances. A steady-state Kalman filter observing $[e; \dot{e}]$ produces the estimate $\hat{d}$ of d via the innovation; it is not frozen but converges to the true disturbance. Both e and $\dot{e}$ are measured directly (position from forward kinematics, velocity from $J_v \dot{q}$), so $C = [I_6 \ 0]$ and the filter is 9-dimensional — the 6 error states and the 3 integrating disturbance states, with no extra velocity-estimation states. The estimate $\hat{d}$ enters the free response, pre-compensating the QP before the disturbance accumulates in the error state.

Implementation note (process-noise scaling). The random-walk covariance Q_w is a fixed tuning constant in the present implementation. For a disturbance-tracking bandwidth invariant to the QP rate it should scale with the sample time, $Q_w = Q_d \Delta t$ (the exact discretization of the continuous random walk (3)); the single constant used here behaves well across the 100–500 Hz range tested.

Theorem 2 (Offset-Free Steady-State Tracking). *Consider the augmented model (11) at a fixed configuration, with constant disturbance $d_k = d_\infty$. Assume: (i) the augmented estimator is detectable and its estimation error is asymptotically stable, so $\hat{d}_k \rightarrow d_\infty$; (ii) the receding horizon controller stabilizes the nominal augmented closed loop; and (iii) the input constraint is inactive at the steady state. Then the steady-state tracking error is zero: $\lim_{k \rightarrow \infty} e(k) = 0$. If $d_k \rightarrow d_\infty$ asymptotically, the same conclusion holds provided the estimator remains asymptotically tracking.*

Proof. Let $\hat{d}_N = \mathbf{1}_N \otimes \hat{d}$ and define the centred input sequence $V = U + \hat{d}_N$. Since $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$, the identity

$$\Phi x_e + D_{\text{bar}} \hat{d} + \Gamma U = \Phi x_e + \Gamma V$$

holds for any disturbance estimate $\hat{d}$, not only at steady state. The unconstrained cost can therefore be written, up to

constants, as

$$\frac{1}{2}(\Phi x_e + \Gamma V)^\top \bar{Q}(\Phi x_e + \Gamma V) + \frac{1}{2}V^\top \bar{R}V.$$

Thus the nominal controller is exactly the stabilizing linear regulator for the disturbance-free backbone in the variable V : $V^* = -Kx_e$. The applied first input is therefore $F_{\text{mpc}} = v_0 - \hat{d}$, and the plant evolves as

$$x_e^+ = (A_d - B_d K_0)x_e + B_d(d_\infty - \hat{d}),$$

where K_0 is the first block row of K . By assumption (ii), the nominal closed loop is asymptotically stable. By assumption (i), the additive input $B_d(d_\infty - \hat{d})$ vanishes, so the stable linear system converges to the same equilibrium. Hence $x_{e,k} \rightarrow 0$ and therefore $e_k \rightarrow 0$.

The theorem does not claim zero error for arbitrary non-convergent time-varying forces or for steady states that require sustained actuator saturation; those cases require a separate invariant-set or anti-windup analysis. $\square$

Remark 5 (Frozen-configuration scope). *Theorem 2 is a frozen-configuration offset-free result: it fixes $\rho_k = q$ so that $B_d(\rho_k)$ and the regulator gain are constant. Theorem 3 below relaxes this to a single fixed feedback law certified over a polytope of configurations, rather than one frozen configuration — but that certified law is not the deployed receding-horizon MPC's realized policy (see the scope discussion accompanying Theorem 3), so it does not by itself remove the frozen-configuration caveat for the actual controller. The moving-reference experiments in Section VI are an empirical illustration, not a direct consequence, of Theorem 3; the per-equilibrium offset-free property is Theorem 2 applied at each sustained-contact configuration the trajectory visits.*

Theorem 3 (Quadratic Stabilizability of the Interaction-Dynamics Backbone). *If $\Lambda^{-1}(q)(q)$ stays within a compact polytope $\mathcal{P}$ over the operating region of interest, a finite vertex LMI feasibility test certifies a single fixed linear feedback gain K that makes the LPV backbone $x_{e,k+1} = A_d x_{e,k} + B_d(\rho_k)F_{\text{mpc},k}$ exponentially stable — by one common quadratic Lyapunov function — uniformly over $\mathcal{P}$, independent of how fast the configuration ρ_k varies. This is a statement about the LPV backbone under that single certified gain, not directly about the finite-horizon receding-horizon MPC actually deployed, whose realized policy at each step is the QP's own minimizer rather than necessarily the certified K ; the disturbance estimator, the receding-horizon re-solve, and the safety/passivity filters (Theorem 4, Proposition 2) are separately-scoped results, not covered by this one certificate. For the FR3, sampling $\Lambda^{-1}(q)(q)$ along the circular benchmark (4700 samples, 64 polytope vertices, all confirmed positive-definite) gives a feasible, well-conditioned certificate at guaranteed rate $\rho \leq 0.996$ over the sampled operating region traversed by the benchmark trajectory — not a verified bound over the entire singularity-free workspace. The full statement, the LMI, the proof, and the numerical instantiation are in the supplementary material (Sec. S2, Theorem S1), reproducible from the released script (`lmi_workspace_stability_probe.py`).*

D. Disturbance Prediction Validity over the Horizon

A natural question for any offset-free MPC is how good the disturbance prediction is *over the prediction horizon*, not merely at the current step. The QP propagates the augmented model (8), (11) under the random-walk prediction $\hat{d}_{k+i|k} = \hat{d}_{k|k}$ — a flat extrapolation that is exact only for a strictly constant disturbance. For a time-varying human force the prediction degrades with horizon depth i . We address this in three parts.

Bound. Assume the human force is Lipschitz in time, $\|\dot{d}(t)\|_2 \leq L_d$, and let $\|d_k - \hat{d}_{k|k}\|_2 \leq e_K$ be the steady-state Kalman estimation error. Since the random-walk prediction is the identity, the i -step prediction error obeys

$$\|d_{k+i} - \hat{d}_{k+i|k}\|_2 \leq e_K + L_d i \Delta t, \quad i = 0, \dots, N-1, \quad (12)$$

where L_d (units N/s) is the time-Lipschitz constant bounding the disturbance rate ($L_d \rightarrow 0$ for a sustained push, $L_d \approx 5$ N/s for a brisk guidance force) and e_K is the steady-state Kalman error; the bound follows by the triangle inequality on $d_{k+i} = d_k + \int \dot{d} d\tau$. The first term is the *current* estimation error (bounded by filter design, shrinking as the filter converges); the second is the *extrapolation* error, linear in horizon depth and unavoidable for any constant-disturbance internal model.

Why it is not load-bearing. Three properties keep (12) benign. (i) *Receding horizon*: only $F_{\text{mpc},0}$ is applied and the QP is re-solved every Δt with a fresh $\hat{d}_{k|k}$, so the loose late-horizon predictions never reach the plant — they only shape the near-term optimum. (ii) *Short horizon*: at $N = 10$, $\Delta t = 10$ ms (100 ms; 20 ms at 500 Hz) the extrapolation term is small in absolute units — for a sustained push (the case of Theorem 2) $L_d \approx 0$ and the prediction is exact, while for a brisk voluntary guidance force at $\|\dot{F}_h\| \lesssim 5$ N/s the worst-case end-of-horizon error is $L_d N \Delta t \lesssim 0.5$ N, a small fraction of the available control authority. (iii) *Structured augmentation*: when the human force has known temporal structure — physiological tremor (8–12 Hz) or a slow guidance ramp — the random-walk block can be replaced by the corresponding internal model (a harmonic-oscillator state at the tremor frequency, or a constant-plus-ramp double integrator) so that the component is *predicted* forward exactly rather than extrapolated flat. This grows the estimator by a few states, leaves the constant- A_d error block (and hence the precomputed Φ) untouched, and removes that component from L_d in (12).

Metric. The natural diagnostic is the N -step disturbance-prediction RMS, $\varepsilon_N = \text{RMS}_k \|d_k - \hat{d}_{k|k-N}\|$ — the error of the estimate propagated N steps before the measurement — monitored alongside the one-step value ε_1 . For the step-force benchmark (Section VI) the disturbance is piecewise constant, so $\varepsilon_N \approx \varepsilon_1$ except across the force-onset transient; the gap $\varepsilon_N - \varepsilon_1$ isolates exactly the horizon-extrapolation error and is the quantity to watch when porting the controller to time-varying interaction; it is measured directly under time-varying forces in the supplementary material (Sec. S6, Table S4), where it grows linearly with the disturbance rate as (12) predicts.

IV. ORIENTATION STABILIZATION AND NULL-SPACE CONTROL

A. Orientation Stabilization

Orientation is regulated by a PD law in operational space [4]. The axis-angle error $e_R \in \mathbb{R}^3$ is extracted from $R_d^\top R$ [5]:

$$\tau_{\text{orient}} = J_\omega^\top (-K_{\text{rot}} e_R - D_{\text{rot}} \omega) \quad (13)$$

with $K_{\text{rot}} = 20 \text{ Nm/rad}$, $D_{\text{rot}} = 6 \text{ Nm}\cdot\text{s/rad}$, following the operational-space impedance structure of [2], [4]. This runs at 1 kHz as a *separate* control channel from the translational QP in (4) — not a dynamically decoupled one: the null-space projector $\tilde{N}^\top$ there applies only to τ_{null} , and $J_\omega^\top F_{\text{orient}}$ still couples into translational acceleration through the mass matrix, as (7)'s orientation-coupling term makes explicit. That residual dynamic coupling is part of $d_{\text{acc}}(t)$ (7), whose force-equivalent is what $\hat{d}$ estimates and cancels — not eliminated by projection.

B. Null-Space Joint-Limit Safety and Invariance

Because both the translational MPC channel and the orientation PD channel are actively controlled, the primary task is the full 6-DOF pose; for the FR3 ($n = 7$) this leaves $n - 6 = 1$ null-space DOF. The null-space torque $\tilde{N}^\top \tau_{\text{null}}$ (where $\tilde{N} = I - \tilde{J}\tilde{J}^\top$ [4], [22] is the projector of the full pose Jacobian) does not affect end-effector position or orientation [22].

Null-space inverse-barrier. Joint-limit regulation via null-space repulsive potentials is a standard secondary objective [4], [20]. Define the clearance (in rad) to the nearest limit:

$$\phi_i(q) = \min(q_i - q_{\min,i}, q_{\max,i} - q_i) \geq 0$$

The inverse-barrier gradient [20]:

$$g_i(q) = \begin{cases} +k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right) & \phi_i < \delta_i, q_i \text{ near lower limit} \\ -k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right) & \phi_i < \delta_i, q_i \text{ near upper limit} \\ 0 & \text{otherwise} \end{cases} \quad (14)$$

with threshold $\delta_i = \eta(q_{\max,i} - q_{\min,i})$ ($\eta = 0.10$), $k_b = 50 \text{ Nm}$. Combined with a centering spring [22]:

$$\tau_{\text{null}} = -k_{\text{null}}(q - q_0) + g(q) - d_{\text{null}}\dot{q} \quad (15)$$

with $k_{\text{null}} = 10 \text{ Nm/rad}$, $d_{\text{null}} = 2 \text{ Nm}\cdot\text{s/rad}$, toward the FR3 neutral pose $q_0 = [0, -0.785, 0, -2.356, 0, 1.571, 0.785]^\top$.

Task-space workspace projection. When joints approach limits, the null-space alone cannot prevent violations for task-constrained DOF [20]. We additionally project via the Jacobian pseudo-inverse [4]:

$$\delta p = k_{\text{ws}} (J_v J_v^\top + \epsilon_r I)^{-1} J_v g(q), \quad \|\delta p\| \leq p_{\text{max}} \quad (16)$$

with $k_{\text{ws}} = 5 \times 10^{-4} \text{ m/(Nm/rad)}$, $p_{\text{max}} = 0.06 \text{ m}$, Tikhonov regularization $\epsilon_r = 10^{-8}$ [5]. The QP optimizes toward $p_{d,\text{eff}} = p_d + \delta p$.

Conditional sampled-data joint-limit filter. The dual-barrier controller above provides practical joint-limit regulation. A conditional forward-invariance certificate is obtained by adding a one-step joint-limit control-barrier filter to the commanded torque. Let

$$h_i^-(q) = q_i - q_{\min,i} - \epsilon, \quad h_i^+(q) = q_{\max,i} - \epsilon - q_i,$$

and define the certified safe set

$$\mathcal{C}_\epsilon = \{q : h_i^-(q) \geq 0, h_i^+(q) \geq 0, i = 1, \dots, n\}.$$

At sampling time k , approximate the next joint position under a constant torque over one servo period T_s by

$$q_{k+1|k} = q_k + T_s \dot{q}_k + \frac{1}{2} T_s^2 M^{-1}(q_k) (\tau_k + \hat{\tau}_{\text{ext},k} - b_k), \quad (17)$$

where $b_k = C(q_k, \dot{q}_k) \dot{q}_k + G(q_k)$, $\hat{\tau}_{\text{ext},k} = J^\top(q_k) \hat{\mathcal{F}}_{h,k}$ is the measured or estimated external generalized force, and τ_k is the final command after the nominal MPC and null-space terms. If no reliable external-force estimate is available, both the lower- and upper-limit inequalities in (18) should be robustly tightened using a bound on $\|\tau_{\text{ext}} - \hat{\tau}_{\text{ext}}\|$ propagated through $\frac{1}{2} T_s^2 M^{-1}(q_k)$. The safety filter selects the closest feasible torque to the nominal command subject to

$$h_i^\pm(q_{k+1|k}) \geq (1 - \alpha) h_i^\pm(q_k), \quad i = 1, \dots, n, \quad \alpha \in (0, 1]. \quad (18)$$

Since (17) is affine in τ_k , (18) adds linear inequalities to the final torque projection.

Theorem 4 (Sampled-Data Joint-Limit Invariance). *Assume $q_0 \in \mathcal{C}_\epsilon$, the model used in (17), including $\hat{\tau}_{\text{ext},k}$ or a valid two-sided robust tightening, matches the sampled plant at $k+1$ or encloses it within the tightened lower/upper bounds, and the safety-filter constraints (18) are feasible and enforced at every sample. Then $\mathcal{C}_\epsilon$ is forward invariant for the sampled joint positions: $q_k \in \mathcal{C}_\epsilon$ for all $k \geq 0$.*

Proof. Suppose $q_k \in \mathcal{C}_\epsilon$. Then $h_i^\pm(q_k) \geq 0$ for every joint. By (18),

$$h_i^\pm(q_{k+1}) = h_i^\pm(q_{k+1|k}) \geq (1 - \alpha) h_i^\pm(q_k) \geq 0,$$

where equality between q_{k+1} and $q_{k+1|k}$ follows from the one-step model-matching assumption. Hence $q_{k+1} \in \mathcal{C}_\epsilon$. Induction from $q_0 \in \mathcal{C}_\epsilon$ proves the claim. $\square$

The theorem is deliberately conditional: it certifies invariance only when the one-step constraints are feasible and enforced. In the implementation the filter is the *final* torque projection (after the nominal MPC and null-space terms), so it takes priority over the soft null-space barrier and workspace projection, which only *bias* the arm away from limits. When the constraints (18) cannot all be met — e.g., barrier and CBF pull in conflicting directions, or τ_{base} alone is already limit-inducing — they are relaxed with a penalized slack $s \geq 0$ ($\min \|\tau - \tau_{\text{nom}}\|^2 + w s^2$ s.t. $h_i^\pm(q_{k+1|k}) \geq (1 - \alpha) h_i^\pm(q_k) - s$), returning the minimum-violation command rather than reporting infeasibility; a logged $s = 0$ is exactly the per-sample certificate that the theorem held without relaxation. The experiments below report the empirical behavior of the dual-barrier joint-limit regulation law; hardware runs intended to claim certified joint-limit safety should log the CBF residuals and the slack s . The certificate is sampled-data: possible intersample motion is covered only to the extent that the margin ϵ and any robust tightening dominate the within-sample excursion.

Remark 6 (Robust tightening bound and ISSf). *Let $\delta\tau_k$ collect the unmodeled generalized force in the one-step predictor (human-torque estimation error $J^\top(F_h - \hat{F}_h)$, finite-jerk*

torque change, and inertial-model error), with $\|\delta\tau_k\| \leq B_\tau$. The induced one-step position error $\frac{1}{2}\Delta t^2 M^{-1}\delta\tau_k$ is bounded by $\Delta q_{\text{safe}} = \frac{1}{2}\Delta t^2 \|M^{-1}\|_2 B_\tau$; tightening the one-step constraints by Δq_{safe} makes Theorem 4 input-to-state safe—the sampled positions stay in C_ϵ for any disturbance within B_τ provided $\epsilon \geq \Delta q_{\text{safe}}$. At $\Delta t = 1 \text{ ms}$ with $\|M^{-1}\|_2 \lesssim 10 \text{ kg}^{-1}$ this is $\approx 5 \times 10^{-6} B_\tau \text{ rad}$ (B_τ in $N\cdot m$), well within the experimental ϵ margin.

C. Energy-Tank Passivity Layer for Co-Manipulation

The offset-free predictive controller is designed for precision disturbance rejection; intentional co-manipulation additionally needs a passivity certificate at the human–robot port. We add a sampled energy tank on the translational task channel. Let F_k^0 be the predictive task force before passivity filtering, $v_k = \dot{p}_k$ the measured end-effector translational velocity, and $E_k \in [E_{\min}, E_{\max}]$ the tank energy. The layer scales only the task force,

$$F_k = s_k F_k^0, \quad s_k \in [0, 1], \quad (19)$$

leaving feedforward, orientation, and null-space torques outside the tank accounting. Define $P_k^0 = \max\{(F_k^0)^\top v_k, 0\}$ and optional human recharge power

$$P_{h,k} = \gamma \max\{\hat{F}_{h,k}^\top v_k, 0\}, \quad \gamma \in [0, 1].$$

The scale is

$$s_k = \begin{cases} 1, & P_k^0 = 0, \\ \min\left(1, \frac{(E_k - E_{\min})/T_s + P_{h,k}}{P_k^0}\right), & P_k^0 > 0, \end{cases} \quad (20)$$

and the tank update is

$$E_{k+1} = \text{sat}_{[E_{\min}, E_{\max}]}(E_k + T_s(P_{h,k} - \max\{F_k^\top v_k, 0\})). \quad (21)$$

Proposition 2 (Sampled Passivity of the Task Channel). *If $E_0 \geq E_{\min}$ and (20)–(21) are enforced at every servo sample, then $E_k \geq E_{\min}$ for all k and*

$$\sum_{j=0}^{k-1} T_s \max\{F_j^\top v_j, 0\} \leq E_0 - E_{\min} + \sum_{j=0}^{k-1} T_s P_{h,j}.$$

Proof. By construction, (20) gives $T_s \max\{F_k^\top v_k, 0\} \leq E_k - E_{\min} + T_s P_{h,k}$. Substitution into (21) gives $E_{k+1} \geq E_{\min}$ before saturation, and the saturation preserves the lower bound. Summing the unsaturated balance gives the stated dissipation inequality. $\square$

Scope. Proposition 2 bounds only the scaled translational predictive-force channel F_k — a channel-level energy budget, not a full 6-DOF port passivity proof, and it should not be read as guaranteeing coupled stability against an arbitrary passive environment. Each excluded channel is *locally* well-behaved in isolation — the orientation channel is a passive PD ($K_{\text{rot}}, D_{\text{rot}} > 0$) with respect to its own ($\tau_{\text{orient}}, \omega$) port, the null-space torque only redistributes energy within the redundant subspace, and the feedforward gravity/Coriolis compensation is workless at steady state — but this does not by itself bound the *cross-coupling* power these channels can deliver into translation through the mass matrix: (7) explicitly retains an orientation-to-translation coupling term

TABLE I
COMPUTATIONAL BUDGET PER CONTROL LAYER

Layer	Computation	Rate	Budget
Feedforward	$\tau_{\text{ff}}: \text{qfrc_bias} + J_v^\top \Lambda \ddot{p}_d$	1 kHz	<0.1 ms
QP	OSQP, 30 vars, first torque row	100 Hz	<1 ms
Kalman	9-state predict + update	100 Hz	<0.1 ms
Orientation	$J_\omega^\top (-K_{\text{rot}} e_R - D_{\text{rot}} \omega)$	1 kHz	<0.1 ms
Null-space	Barrier gradient + projection	1 kHz	<0.1 ms

$-J_v M^{-1} J_\omega^\top F_{\text{orient}}$, so τ_{orient} can do translational work the tank accounting does not see. A full-port certificate — bounding the coupled channels jointly, not just each in isolation — is a genuine extension, not a straightforward one, and is left to future work.

In hardware logs, the certificate is the tuple `passivity_certified`, `passivity_energy`, and `passivity_scale`. The default $\gamma = 0$ gives a conservative certificate; $\gamma > 0$ allows a configured fraction of measured human input work to recharge the tank.

V. REAL-TIME IMPLEMENTATION

The two-layer architecture is robot-agnostic: Layer 1 requires only M , $C\dot{q} + G$, and J_v ; Layer 2 is a fixed-size QP independent of n . Reference implementation uses the Franka FR3 via FCI [21].

QP solver. We use OSQP [23] with warm-starting, which in our simulation implementation reduced cold-start latency from 5 ms to under 0.5 ms (single-threaded, commodity CPU; full timing statistics are future hardware work). Although $H = \Gamma^\top Q \Gamma + \bar{R}$ varies with configuration through $B_d(\rho_k)$, updating it requires only overwriting the pre-allocated non-zero elements of the upper-triangular CSC sparse matrix — a $O(N^2)$ coefficient update completed in under 0.05 ms via `osqp_update_P`, preserving OSQP’s factorization-reuse structure. The linear term $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$ is updated similarly via the OSQP linear-cost update; the $+\bar{R} d_N$ term is required by the offset-free input-centering argument in Theorem 2.

ZOH policy. Between QP solves, F_{mpc} is held constant. Layer 1 (τ_{ff}) is recomputed at 1 kHz from fresh $(q, \dot{q})$, continuously cancelling gravity and Coriolis.

Simulation. All experiments use the FR3 model from MuJoCo Menagerie [24] with the MuJoCo physics engine [25] at 1 kHz. The hardware-path MuJoCo verification suite runs the same FR3 interface used for real deployment, including torque-rate limiting, the one-step CBF projection, and the energy-tank passivity filter; direct benchmark scripts are used only for algorithm comparisons and figures.

Every numeric constant used across the experiments of Section VI is consolidated in Table S1 of the supplementary material.

VI. EXPERIMENTS

We evaluate the controller on two dynamic benchmarks and two stress tests, against classical baselines and a predictive variable-impedance comparator. **DI-MPC** denotes the proposed double-integrator MPC realization, and **MPVIC** is the predictive variable-impedance comparator, in the class

TABLE II
BENCHMARKED CONTROLLERS

ID	Controller	Disturbance estimator
C1	Classical Impedance	—
C2	Admittance ($K_d = 100$ N/m)	Virtual spring
C3	PI Impedance ($K_{int} = 80$ N/(m·s))	Integral
MPVIC	Var.-Imp. MPC, 100 Hz	Kalman (sched.)
C4	DI-MPC, 100 Hz	None
C5	DI-MPC + Kalman, 100 Hz	Augmented Kalman
C6	DI-MPC, 500 Hz	None
C7	DI-MPC + Kalman, 500 Hz	Augmented Kalman

TABLE III
BENCHMARK I — CIRCULAR TRAJECTORY, 15 N STEP FORCE

Controller	RMS total [mm]	RMS contact [mm]	Peak defl. [mm]	SS err. [mm]
C1 – Impedance	35.6	41.1	51.8	44.8
C2 – Admittance	113.9	174.7	210.5	186.7
C3 – PI Impedance	36.2	27.4	43.7	21.4
MPVIC – Var.-Imp. MPC	12.9	4.5	7.5	4.8
C4 – MPC 100 Hz	11.4	2.2	2.9	2.8
C5 – MPC+K 100 Hz	11.4	0.5	2.6	<0.05
C6 – MPC 500 Hz	12.8	0.8	1.1	1.1
C7 – MPC+K 500 Hz	12.6	0.2	0.8	<0.05

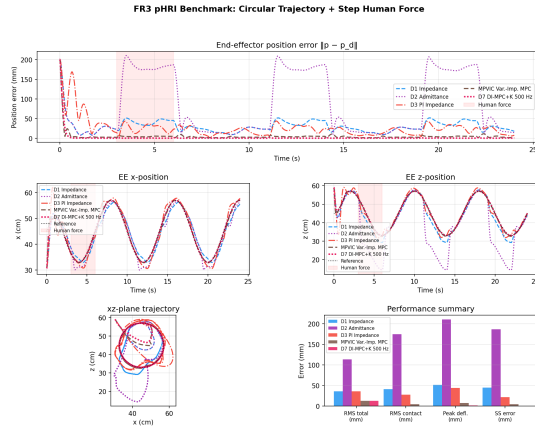


Fig. 1. Benchmark I — Circular trajectory under 15 N step pHRI. For visibility the plot shows D1/D2/D3/D7 (corresponding to C1/C2/C3/C7) plus the predictive variable-impedance MPVIC baseline; Table III reports the full ablation. The final D7 controller achieves near-zero steady-state error and sub-millimeter peak deflection, while MPVIC—though predictive—retains a visible steady-state offset.

of [15], [17]. MPVIC rolls out the same horizon and uses the same estimate $\hat{d}$ as the proposed controller, but only to *schedule* the apparent stiffness $K^* \in \{200, \dots, 3000\}$ N/m rather than to cancel the force — isolating variable-impedance adaptation from offset-free augmentation. All controllers use $K_d = 300$ N/m nominal, critically damped, with the inner feedforward loop running at 1 kHz for every variant. Tables report every controller; plots show four representative curves (D1–D3, D7) for readability.

Benchmark I — circular trajectory under step force. The end-effector tracks a 12 cm radius circle in the XZ sagittal plane ($\omega = 2\pi/8$ rad/s) while a 15 N step force $F_h = [0, 0, -15]$ N is applied for 3 s of every 8 s cycle (3 cycles, 24 s total); metrics are averaged over the three force events.

The comparison isolates five mechanisms:

TABLE IV
BOUNDARY TEST, $R = 20$ CM CIRCLE

Controller	RMSE [mm]	Min margin	Result
IMP	26.97	0.049	LIMIT VIOLATION
MPC (C5, 100 Hz QP)	12.35	0.084	AVOIDED
MPC (C5, 30 Hz QP)	11.21	0.083	AVOIDED

- **Kalman augmentation removes steady-state error (C4 vs. C5).** With QP rate and horizon held fixed, folding $\hat{d}$ into the free response drives steady-state error below 0.05 mm — down from 2.8 mm over C4 and 44.8 mm over C1; only the disturbance estimate differs between C4 and C5, isolating offset-free cancellation directly.
- **A large early gain, but gain-confounded (C1 vs. C4).** With no disturbance model at all, C4’s QP still cuts contact-window RMS from 41.1 to 2.2 mm (19 $\times$) and peak deflection from 51.8 to 2.9 mm. C1’s nominal $K_d = 300$ N/m is a design choice, not C4’s realized closed-loop gain (Remark 3), so this comparison does not separate predictive look-ahead from a stiffer realized gain; a matched-gain, horizon-length ablation is left to future work.
- **Adapting stiffness alone is not enough (MPVIC vs. C5).** MPVIC uses the *same* $\hat{d}$ as C5 but only to schedule stiffness, cutting contact RMS to 4.5 mm — better than every reactive baseline — yet it retains a 4.8 mm steady-state error, since a finite apparent stiffness can only bound deflection at $e_\infty = -K^{*-1}\hat{d} \neq 0$. Offset-free cancellation (Theorem 2) removes this residual entirely ($\sim 140\times$). MPVIC is our own discrete-stiffness scheduler in the family of [15], [17], not a reproduction of a specific published algorithm; its stiffness set and force penalty have not been swept for sensitivity.
- **Rate and estimation are largely orthogonal (C4–C7).** Raising the QP rate from 100 to 500 Hz mainly shrinks the zero-order-hold transient; adding the Kalman estimator mainly removes the steady-state error. C7 combines both and gives the lowest contact-window RMS, peak deflection, and steady-state error of any controller; its total RMS (12.6 mm, averaged over the whole cycle) is marginally higher than C4/C5’s (11.4 mm), since the faster rate sharpens the contact transient without improving free-motion tracking.
- **Admittance yields by design (C2).** Its 174.7 mm contact-window RMS is close to the equilibrium prediction $15/100 = 150$ mm, the expected behavior of intentional compliance.

Empirical joint-limit avoidance by the dual soft barrier (boundary test). A 20 cm radius circle pushes the arm toward its workspace boundary (Table IV, Fig. 2), exercising the soft null-space barrier and workspace projection only; the final CBF filter (Theorem 4) is not engaged or logged here.

- Classical impedance violates the 5% margin; the dual-barrier MPC avoids it, holding a 0.083–0.084 margin at both 100 and 30 Hz — joint-limit avoidance is insensitive to QP rate.
- The elevated MPC RMSE (12.4 mm vs. 0.3 mm at $R = 12$ cm) reflects the workspace projection deliberately trading tracking accuracy for clearance near the boundary.

Robustness to position-measurement noise and model mismatch. The architecture depends on a Kalman estimator,

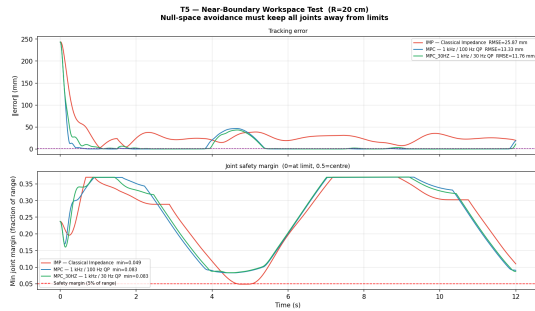


Fig. 2. Boundary test ($R = 20$ cm). Classical impedance violates the 5% joint margin; the dual-barrier MPC maintains a fractional joint margin ≥ 0.084 throughout. Elevated RMSE (12.4 mm) reflects the workspace projection intentionally offsetting p_d by up to 6 cm to maintain joint-limit clearance.

TABLE V
ROBUSTNESS OF MPC+KALMAN (100 HZ QP)

(a) EE position noise — 10N step, SS error (5 seeds)			
noise 1σ	0 mm	1 mm	2 mm / 5 mm
SS err (mm)	0.08	$0.19 \pm .03$	$0.36 \pm .04 / 0.89 \pm .07$
(b) Inertia mismatch — free-circle RMSE (mm)			
inertia error	0%	+10% / +20%	+30%
Kalman on	0.24	$0.24 / 0.23$	0.23
Kalman off	0.96	$0.87 / 0.80$	0.74

sensitive to measurement noise, and on Layer-1 cancellation, sensitive to model error, so we stress-test each independently: the plant is always the true model, and only the controller’s inputs (added EE-position noise) or its model (the feedforward inertia Λ , scaled up by 0 to 30% relative to the true plant) are perturbed. Velocity noise, sensing latency, and force-sensor noise are not modeled here.

- Under a 10N step disturbance (top table; steady-state error as mean $|e|$ over the last 0.5 s of the push, mean $\pm$ std over 5 measurement-noise seeds), even an unrealistically large 5 mm (1σ) position noise leaves steady-state error below 1 mm, with the transient peak rising only modestly (1.6 to 2.2 mm) — the integrating Kalman state averages out zero-mean sensor noise.
- Under free-space XZ-circle tracking with a deliberately wrong feedforward inertia (bottom table), Kalman-augmented RMSE stays essentially invariant to up to 30% inertia error ($0.24 \rightarrow 0.23$ mm), since the resulting feedforward force error is slowly varying and is absorbed by $\hat{d}$ — the empirical counterpart of the exactness remark (Section III). Disabling the Kalman exposes the mismatch ($0.74\text{--}0.96$ mm, $3\text{--}4\times$ worse), confirming that it is the disturbance state, not the nominal model, that confers the robustness.

Further experiments and parameters. The supplementary material reports three further ablations run under the same codebase: a time-varying-force horizon-prediction study (Table S4), a human-force magnitude and shape sweep (Table S5), and an impedance-backbone ablation, C8, that degrades gracefully rather than collapsing to bare feedforward when the QP’s corrective authority is curtailed (Table S6) — along with the full numeric parameter table (Table S1).

VII. DISCUSSION AND CONCLUSION

This paper argued that safe pHRI is best designed by predicting *interaction dynamics* directly (Definition 1): operational-space feedforward cancellation exposes a linear interaction-dynamics backbone — a double-integrator reduction of the interaction error — with configuration dependence confined to $B_d(\rho_k)$, turning compliance, tracking, disturbance rejection, and safety into properties of one 30-variable convex QP. Within its scope the controller recovers classical impedance in the unconstrained, disturbance-free limit (Theorem 1), is offset-free under constant bounded force (Theorem 2), and is quadratically stabilizable by one fixed feedback gain over a certified polytope of configurations (Theorem 3). On a Franka FR3 in MuJoCo it reduces steady-state error under a sustained 15 N force by $>800\times$ over classical impedance, cuts free-space circle RMSE by $77\text{--}97\times$, keeps joints inside their limits at the workspace boundary, and is robust to position-measurement noise and up to 30% inertial mismatch; the supplementary material adds a second waypoint-hold benchmark, a disturbance-rate sweep, and an impedance-backbone ablation (Sec. S8) that degrades gracefully rather than collapsing when the optimizer’s corrective authority is curtailed.

The framework is one realization, not a universal replacement for admittance-style co-manipulation. Because the interface needs only M , $C\dot{q} + G$, and J_v , it ports across torque-controlled arms by substituting the robot model and joint-limit parameters; and because it reduces contact to an analytic linear model with a fixed transition matrix, it may serve as a dynamics prior for model-based physical AI, letting a learned model capture only the residual uncertainty of intent, contact, and environment. The next validation step is real FR3 pHRI testing with synchronized tracking, force-estimation, CBF-residual, and energy-tank logs.

REFERENCES

- [1] L. Villani and J. De Schutter, “Force control,” in *Springer Handbook of Robotics*, 2nd ed., B. Siciliano and O. Khatib, Eds. Springer, 2016, pp. 195–220.
- [2] A. Albu-Schäffer, C. Ott, and G. Hirzinger, “A unified passivity-based control framework for position, torque and impedance control of flexible joint robots,” *Int. J. Robot. Res.*, vol. 26, no. 1, pp. 23–39, 2007.
- [3] S. Haddadin, A. Albu-Schäffer, and G. Hirzinger, “Requirements for safe robots: Measurements, analysis and new insights,” *Int. J. Robot. Res.*, vol. 28, no. 11–12, pp. 1507–1527, 2009.
- [4] O. Khatib, “A unified approach for motion and force control of robot manipulators: The operational space formulation,” *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [5] B. Siciliano, L. Sciacivico, L. Villani, and G. Oriolo, *Robotics: Modelling, Planning and Control*. Springer, 2009.
- [6] N. Hogan, “Impedance control: An approach to manipulation—Parts I–III,” *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [7] S. Chiaverini, B. Siciliano, and L. Villani, “A survey of robot interaction control schemes with experimental comparison,” *IEEE/ASME Trans. Mechatronics*, vol. 4, no. 3, pp. 273–285, 1999.
- [8] Y.-Y. Cao, Z. Lin, and D. G. Ward, “Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances,” *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [9] —, “An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation,” *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [10] D. Q. Mayne, J. B. Rawlings, C. V. Rao, and P. O. M. Scokaert, “Constrained model predictive control: Stability and optimality,” *Automatica*, vol. 36, no. 6, pp. 789–814, 2000.
- [11] D. Q. Mayne, “Model predictive control: Recent developments and future promise,” *Automatica*, vol. 50, no. 12, pp. 2967–2986, 2014.

- [12] G. Pannocchia and J. B. Rawlings, "Disturbance models for offset-free model-predictive control," *AIChE Journal*, vol. 49, no. 2, pp. 426–437, 2003.
- [13] R. Cao, L. Cheng, and H. Li, "Passive model-predictive impedance control for safe physical human–robot interaction," *IEEE Trans. Cogn. Dev. Syst.*, vol. 16, no. 2, pp. 426–435, 2024.
- [14] K. Haninger, C. Hegeler, and L. Peternel, "Model predictive impedance control with Gaussian processes for human and environment interaction," *Robotics and Autonomous Systems*, vol. 165, p. 104431, 2023.
- [15] L. Roveda, N. Iannacci, F. Vicentini, N. Pedrocchi, F. Braghin, and L. M. Tosatti, "Optimal impedance via model predictive control for robot-aided rehabilitation," *Control Eng. Practice*, vol. 83, pp. 11–23, 2019.
- [16] G. Wang, Z. Lin, F. Min, D. Li, and N. Liu, "Ensuring safe physical HRI: Integrated MPC and ADRC for interaction control," *Actuators*, vol. 14, no. 12, p. 608, 2025.
- [17] J. Xue, W. Liang, Y. Wu, and T. H. Lee, "Model predictive variable impedance control towards safe robotic interaction in unknown disturbance-rich environments," *Robotics and Autonomous Systems*, vol. 189, p. 104961, 2025.
- [18] R. Ikeura and H. Inooka, "Variable impedance control of a robot for cooperation with a human," in *Proc. IEEE ICRA*, 1995, pp. 3097–3102.
- [19] Y.-Y. Cao and Z. Lin, "Min–max MPC algorithm for LPV systems subject to input saturation," *IEE Proc. Control Theory Appl.*, vol. 152, no. 3, pp. 266–272, May 2005.
- [20] H. Sadeghian, L. Villani, M. Keshmiri, and B. Siciliano, "Task-space control of robot manipulators with null-space compliance," *IEEE Trans. Robot.*, vol. 30, no. 2, pp. 493–506, 2014.
- [21] Franka Robotics GmbH, "Franka research 3 (FR3) technical documentation," 2023, <https://frankaemika.github.io/docs>.
- [22] L. Sentis and O. Khatib, "Synthesis of whole-body behaviors through hierarchical control of behavioral primitives," *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [23] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, "OSQP: An operator splitting solver for quadratic programs," *Math. Program. Comput.*, vol. 12, no. 4, pp. 637–672, 2020.
- [24] Google DeepMind, "MuJoCo menagerie: A collection of physics-based simulation models," GitHub, 2022, https://github.com/google-deepmind/mujoco_menagerie.
- [25] E. Todorov, T. Erez, and Y. Tassa, "MuJoCo: A physics engine for model-based control," in *Proc. IEEE/RSJ IROS*, 2012, pp. 5026–5033.