

Compact Offset-Free Interaction-Error MPC with Applied-Torque Constraints for Physical Human–Robot Interaction

Anonymous Authors

Abstract—Reference-holding physical human–robot interaction requires bounded transient deviation followed by offset-free reference recovery, without retaining a static deflection under sustained load. Operational-space cancellation reduces the translational tracking error to a double integrator with a configuration-independent transition matrix, turning physical interaction into a predictive quantity on a fixed linear model rather than a property re-derived per contact or configuration. Built on that representation, we present a compact offset-free model-predictive controller for torque-controlled manipulators that matches the reference-holding requirement under a stricter actuation budget than a stiffness-and-damping-calibrated impedance baseline, using no force/torque sensor: a recursive Kalman filter estimates the persistent interaction and model mismatch directly in force coordinates, and a 30-variable quadratic program predicts the error while constraining the complete first applied joint-torque command. In a 1 kHz MuJoCo simulation of a 7-DOF Franka FR3, under a common actuator budget the sensorless controller reaches 0.042 mm repeated-step steady-state error at 113 W peak positive joint power with no torque saturation, versus 2.59 mm at 378 W and 0.45% saturated samples for a stiffness-and-damping-calibrated impedance baseline calibrated to the same closed-loop stiffness — a third of the power, no force measurement, and a structurally zero offset. Controlled ablation attributes the offset rejection to the disturbance-augmented estimator: adding it to an otherwise identical MPC reduces steady-state error from 2.77 to 0.042 mm, consistent with the paper’s frozen-configuration offset-rejection proposition, while ideal measured-force cancellation independently confirms that constant-load rejection is not unique to predictive control.

Index Terms—Physical human–robot interaction, model predictive control, impedance control, disturbance estimation, torque constraints.

I. INTRODUCTION

Impedance and admittance control provide transparent interaction behavior [1], [2]. Their objectives depend on the task: in hand guiding, force-induced displacement may be the command, whereas reference-holding and recovery require a robot to return to a desired motion after yielding to contact. A finite-stiffness impedance retains the equilibrium bias $p - p_d = K_d^{-1} F_h$ under a sustained human force F_h . Integral action can remove this bias, but must be coordinated with actuator saturation [3], [4].

Predictive interaction control is already well established. Existing work optimizes interaction dynamics [5], combines impedance and constraint optimization [6], learns interaction models [7], estimates force online [8], or enforces passivity and safety conditions [9], [10]. High-rate nonlinear manipulator MPC is also possible with tailored computation [11], and

combining MPC with an extended-state disturbance observer has been demonstrated on hardware at millisecond rates [12]. Thus MPC, disturbance estimation, and predictive impedance are not individually new.

Two of these differ from the present formulation in model scope and sensing. Jordana *et al.* [8] embed direct force-sensor feedback in a full nonlinear whole-body MPC, estimating the discrepancy between predicted and measured contact force within that model; the present controller instead uses no force/torque sensor and estimates an unmodelled aggregate disturbance as a random walk in a reduced, configuration-independent three-dimensional force channel. Gold *et al.*’s MPIC [5] predicts contact force explicitly through an interaction model cascaded with low-level PD control, weighting the prediction independently in the cost; for a reference-holding task that weight must be zero to avoid trading position accuracy for compliance, at which point the force prediction stops contributing to disturbance rejection. The present controller instead treats the disturbance as unknown, and its centered input cost achieves offset rejection with no such trade-off: $F_{\text{mpc}} = -\dot{d}$ is exactly cost-free at any position weight. The present contribution is therefore not online force estimation or predictive interaction control as such, but their combination into a sensorless, constant-transition offset-free interface with a proved frozen-configuration equilibrium and a first-move torque-feasibility guarantee.

Offset-free MPC commonly augments a nominal model with a constant output or input disturbance and estimates that state online [13]. The choice of disturbance coordinates is important here. An acceleration disturbance changes with the robot’s configuration through the task inertia, whereas a constant Cartesian load is approximately constant in force coordinates. We therefore place the disturbance in the same force channel as the optimizer: this choice makes the dominant term, the contact force itself, constant in these coordinates, so the random-walk estimator is asymptotically unbiased for it, while the contributions (inertial coupling, friction, model error) are absorbed as a slowly varying residual rather than individually cancelled. This also distinguishes load rejection from intent inference: the estimated vector includes contact, unmodelled dynamics, and cancellation error and cannot identify which part was generated deliberately by a person.

Placing the disturbance in the force channel is not merely an implementation choice but this paper’s central technical claim, carried through by two further mechanisms sharing that same

channel: a centered input cost that makes the steady balancing input $F_{\text{mpc}} = -\hat{d}$ exactly cost-free, avoiding a separate offset calculation, and a first-move constraint applied to the complete torque command $\tau_{\text{base}} + J_v^\top F_{\text{mpc},0}$ rather than to the corrective force alone. Operational-space cancellation exposes the normalized translational error model these mechanisms share. The contributions are:

- 1) a **double-integrator interaction-error representation**: operational-space cancellation reduces translational tracking error to a fixed linear system whose input matrix is scheduled only through the current task inertia, making interaction a predictive state on a shared model rather than a property re-modeled per contact or configuration;
- 2) force-domain disturbance augmentation on that representation, with a centered input cost that admits the steady balancing input $F_{\text{mpc}} = -\hat{d}$ at no cost; and
- 3) a first-move applied-torque constraint on the same representation, and a controlled FR3 simulation comparison against nominal, calibrated, integral, variable-impedance, and ideal measured-force baselines.

The conference version focuses on the implemented controller and its causal ablation. Longer proofs, parameter sweeps, and optional barrier/passivity extensions are not used to support the principal experimental claim.

A. Problem statement and evaluation questions

Given $p_d(t)$, joint feedback $(q, \dot{q})$, and a model (M, C, G, J) , the reference-holding objective is to minimize $e = p_d - p$ while respecting the physical joint-torque box. No contact-force measurement is supplied to the proposed controller. We ask three concrete questions. First, can a 3-D disturbance state remove the sustained-load bias without changing the nominal MPC tuning? Second, does the comparison remain meaningful after matching a classical impedance controller to the MPC's closed-loop response and enforcing the same actuator limits? Third, how does the flat disturbance prediction degrade under time-varying loads? These questions determine the ablations and metrics in Section V.

II. INTERACTION-ERROR MODEL

Consider an n -DOF torque-controlled manipulator; the experiments use the Franka FR3 ($n = 7$) [14]. Its dynamics are

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h, \quad (1)$$

where $\mathcal{F}_h$ is positive when the human pushes onto the robot. Let $J_v \in \mathbb{R}^{3 \times n}$ be the translational Jacobian and

$$\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1} \quad (2)$$

the translational operational-space inertia [15]. The implementation regularizes Λ^{-1} by $10^{-6}I$ and operates away from singularities.

The commanded torque separates feedforward, translation, orientation, and null-space channels:

$$\tau = \tau_{\text{ff}} + J_v^\top F_{\text{mpc}} + J_\omega^\top F_{\text{ori}} + \bar{N}^\top \tau_{\text{null}}, \quad (3)$$

where $\bar{N}$ is the dynamically consistent projector of the full pose task [16]. Feedforward cancellation uses

$$\tau_{\text{ff}} = C\dot{q} + G + J_v^\top \Lambda \ddot{p}_d. \quad (4)$$

With $e = p_d - p$, the residual translation is

$$\ddot{e} = -\Lambda^{-1}(q)F_{\text{mpc}} + d_{\text{acc}}, \quad (5)$$

where d_{acc} collects the projected interaction wrench, $-\dot{J}_v \dot{q}$, orientation-to-translation coupling, friction, and model error. Hence this is a cancellation-plus-disturbance model, not an assumption of perfect nonlinear inversion. We use the force-equivalent disturbance $d = -\Lambda d_{\text{acc}}$. Only the interaction-wrench contribution to d is constant under a constant translational human force, independent of $\Lambda(q)$; the remaining components of d_{acc} — the Coriolis-like coupling term, orientation-to-translation coupling, friction, and model error — are themselves configuration- and motion-dependent, so the aggregate d need not be constant even when the human force is. This is exactly why d is modeled as a random walk rather than a known constant.

For error state $x = [e^\top, \dot{e}^\top]^\top$ and sample period Δt , exact zero-order-hold discretization gives

$$x_{k+1} = A_d x_k + B_d(q_k)(F_{\text{mpc},k} + d_k), \quad (6)$$

$$A_d = \begin{bmatrix} I & \Delta t I \\ 0 & I \end{bmatrix}, \quad B_d(q) = \begin{bmatrix} -\frac{\Delta t^2}{2} \Lambda^{-1}(q) \\ -\Delta t \Lambda^{-1}(q) \end{bmatrix}. \quad (7)$$

Because the continuous double-integrator matrix is nilpotent, A_d is exact and configuration independent; only B_d is scheduled. This constant- A_d property applies to the reduced translational predictor, not to the complete robot dynamics or torque map.

III. OFFSET-FREE RECEDING-HORIZON CONTROLLER

A. Recursive disturbance estimator

Augment the force-equivalent disturbance as a random walk:

$$\begin{bmatrix} x_{k+1} \\ d_{k+1} \end{bmatrix} = \begin{bmatrix} A_d & B_d(q_k) \\ 0 & I \end{bmatrix} \begin{bmatrix} x_k \\ d_k \end{bmatrix} + \begin{bmatrix} B_d(q_k) \\ 0 \end{bmatrix} F_{\text{mpc},k} + \begin{bmatrix} 0 \\ w_k \end{bmatrix}. \quad (8)$$

A discrete recursive Kalman filter observes $[e^\top, \dot{e}^\top]^\top$ from robot position and velocity feedback and propagates the 9×9 covariance at each QP update. Its gain is recomputed rather than frozen. The random walk tracks constant and slowly varying aggregate loads; it does not infer human intent or separate human force from model error.

Let $z = [x^\top, d^\top]^\top$, $C_z = [I_6 \ 0]$, and denote the two matrices in (8) by $A_z(q_k)$ and $B_z(q_k)$. The implemented recursion is

$$\hat{z}_{k+1}^- = A_z(q_k)\hat{z}_k^+ + B_z(q_k)F_{\text{mpc},k}, \quad (9a)$$

$$P_{k+1}^- = A_z(q_k)P_k^+ A_z^\top(q_k) + Q_z, \quad (9b)$$

$$S_{k+1} = C_z P_{k+1}^- C_z^\top + R_z, \quad (9c)$$

$$L_{k+1} = P_{k+1}^- C_z^\top S_{k+1}^{-1}, \quad (9d)$$

$$\hat{z}_{k+1}^+ = \hat{z}_{k+1}^- + L_{k+1}(y_{k+1} - C_z \hat{z}_{k+1}^-), \quad (9e)$$

$$P_{k+1}^+ = (I - L_{k+1} C_z) P_{k+1}^-. \quad (9f)$$

Here $y = [e^\top, \dot{e}^\top]^\top$, with p from forward kinematics and $\dot{p} = J_v \dot{q}$. The covariance Q_z contains a disturbance random-walk block Q_w ; R_z represents the kinematic measurement channel. This filter uses no extra numerical differentiation of end-effector velocity.

For a frozen nonsingular B_d , the disturbance is observable from the measured error state because it affects x_{k+1} through B_d ; equivalently, the first two block rows of the augmented observability matrix contain $[I_6 \ 0]$ and $[A_d \ B_d]$. Since B_d has column rank three away from task singularities, no nonzero disturbance direction is hidden. This establishes the structural requirement behind the estimator, but does not guarantee a particular convergence rate under noise or model mismatch.

B. QP and applied-torque constraint

For horizon $N = 10$, stack $U = [F_{\text{mpc},0}^\top, \dots, F_{\text{mpc},N-1}^\top]^\top \in \mathbb{R}^{30}$ and the predicted errors X . With $d_N = \mathbf{1}_N \otimes \hat{d}$, solve

$$\min_U \quad \frac{1}{2} X^\top \bar{Q} X + \frac{1}{2} (U + d_N)^\top \bar{R} (U + d_N), \quad (10a)$$

$$\text{s.t.} \quad -F_{\text{max}} \leq F_{\text{mpc},i} \leq F_{\text{max}}, \quad i = 0:N-1, \quad (10b)$$

$$-\tau_{\text{max}} \leq \tau_{\text{base}} + J_v^\top F_{\text{mpc},0} \leq \tau_{\text{max}}, \quad (10c)$$

where $\tau_{\text{base}} = \tau_{\text{ff}} + J_\omega^\top F_{\text{ori}} + \bar{N}^\top \tau_{\text{null}}$. The centered effort term in (10a), rather than $\|U\|_{\bar{R}}^2$, makes the steady balancing input $U = -d_N$ cost-free. Condensing yields $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$ and $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$. The current implementation tests this identity directly to prevent an absolute-input penalty from reintroducing an R -dependent offset.

For completeness, the condensed prediction used in code is

$$X = \Phi x_k + \Gamma U + D_{\text{bar}} \hat{d}_k, \quad D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3), \quad (11)$$

where the j th block row of Φ is A_d^j and the (j, i) block of Γ is $A_d^{j-1-i} B_d$ for $i < j$. Thus $x_{\text{free}} = \Phi x_k + D_{\text{bar}} \hat{d}_k$ and

$$H = \Gamma^\top \bar{Q} \Gamma + \bar{R}, \quad h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N. \quad (12)$$

Because $\bar{R} \succ 0$, $H \succ 0$ and the optimization is a strictly convex QP. The identity $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$ is also a useful implementation check: the estimator's force must enter every prediction step through exactly the same scheduled input map as the commanded force.

C. Relation to a realized impedance

For fixed q , inactive constraints, and $\hat{d} = 0$, the strictly convex QP has the unique solution

$$U^* = -H^{-1} \Gamma^\top \bar{Q} \Phi x_k. \quad (13)$$

If $S_0 = [I_3 \ 0 \ \dots \ 0]$ selects the first input block, then $F_{\text{mpc},0} = S_0 U^* = K_e e + K_e \dot{e}$. The unconstrained predictive controller is therefore a configuration-dependent linear impedance whenever the symmetric parts of K_e and K_e have the stiffness and damping sign structure. Importantly, Q_p and Q_v are cost weights; they are not themselves the realized stiffness and damping. The realized gains are the finite-horizon Riccati image in (13).

This relation explains why a nominal 300 N/m impedance is not automatically a fair comparator for the tuned MPC. It also identifies what the disturbance augmentation changes. For

a constant load and exact estimate, define $v = F_{\text{mpc}} + d$. The centered cost penalizes v , so the same feedback acts on the error while the physical command contains the equilibrium feedforward $F_{\text{mpc}} = -d$. In contrast, an unaugmented finite stiffness law must retain a nonzero error to produce its balancing force.

Equation (10c) constrains the complete torque that will actually be applied at the current receding-horizon step, including feedforward, orientation, and null-space terms. It does not assert horizon-wide torque feasibility. Because only the first move is applied, the nominal command satisfies the magnitude limits whenever the QP is feasible. Runtime magnitude clipping and torque-rate limiting remain final guards. If τ_{base} alone exhausts the budget, the released benchmark returns zero correction on QP failure rather than claiming recursive feasibility.

Proposition 1 (Frozen-configuration offset rejection in expectation). *Fix q , assume the augmented pair in (8) is detectable, the closed loop is stable, the QP is feasible with inactive constraints at steady state, the estimator is asymptotically unbiased for a constant d (i.e. $\mathbb{E}[\hat{d}_k] \rightarrow d$), and the unconstrained first-move position gain K_e is nonsingular. Then the mean equilibrium satisfies $\mathbb{E}[e_\infty] = 0$ and $\mathbb{E}[F_{\text{mpc},\infty}] = -d$.*

Proof. Taking expectations of (6) at equilibrium gives $B_d(\mathbb{E}[F_{\text{mpc},\infty}] + d) = 0$; away from singularities B_d has full column rank, so $\mathbb{E}[F_{\text{mpc},\infty}] = -d$, and the first block row then gives $\mathbb{E}[\dot{e}_\infty] = 0$. Because $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$ ((11)), X depends on U only through $V = U + d_N$, so the cost (10a) written in V is independent of $\hat{d}$ and the unconstrained law is exactly $F_{\text{mpc},0} = K_e e + K_e \dot{e} - \hat{d}$ for every $\hat{d}$, not only $\hat{d} = 0$. Taking expectations at equilibrium, with $\mathbb{E}[\hat{d}_\infty] = d$ by unbiasedness, $\mathbb{E}[F_{\text{mpc},\infty}] = K_e \mathbb{E}[e_\infty] - d$. Equating the two expressions for $\mathbb{E}[F_{\text{mpc},\infty}]$ gives $K_e \mathbb{E}[e_\infty] = 0$, hence $\mathbb{E}[e_\infty] = 0$ since K_e is nonsingular. $\square$

For the persistently-tuned filter implemented here ($Q_w \succ 0$, held constant online rather than decayed), the estimation error retains a nonzero steady-state covariance even for exactly constant d , so realized trajectories fluctuate around this mean equilibrium rather than converging to it pointwise; Section V's nonzero residual floors are consistent with that fluctuation, not a violation of the proposition.

This is a frozen-configuration result. Moving-reference performance and active constraint behavior are evaluated numerically; they are not consequences of the proposition. For time-varying d , flat horizon prediction incurs the standard bound

$$\|d_{k+i} - \hat{d}_{k|k}\| \leq e_K + L_d i \Delta t, \quad (14)$$

when $\|d_k - \hat{d}_{k|k}\| \leq e_K$ and $\|\dot{d}\| \leq L_d$. Only the first move is applied and the estimate is refreshed at the next solve.

D. Auxiliary channels and implementation scope

Orientation uses a separate operational-space PD channel. With axis-angle error e_R extracted from $R_d^\top R$, it applies

$$F_{\text{ori}} = -K_{\text{rot}} e_R - D_{\text{rot}} \omega, \quad K_{\text{rot}} = 20I_3, \quad D_{\text{rot}} = 6I_3. \quad (15)$$

This channel is not dynamically decoupled from translation; the resulting cross-coupling is part of d_{acc} in (5).

For the redundant FR3 degree of freedom, define joint clearance $\phi_i = \min(q_i - q_{\min,i}, q_{\max,i} - q_i)$. Within the activation distance $\delta_i = 0.1(q_{\max,i} - q_{\min,i})$, the signed inverse-barrier gradient has magnitude

$$|g_i(q)| = k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right), \quad k_b = 50, \quad (16)$$

and points away from the nearer limit. The null-space torque is $\tau_{\text{null}} = -k_{\text{null}}(q - q_0) + g(q) - d_{\text{null}}\dot{q}$. Near a task boundary, the reference is additionally shifted by

$$\delta p = k_{\text{ws}}(J_v J_v^\top + \epsilon_r I)^{-1} J_v g(q), \quad \|\delta p\| \leq 0.06 \text{ m}. \quad (17)$$

The circular and waypoint comparisons disable this shift; the boundary test uses $k_{\text{ws}} = 5 \times 10^{-4}$.

The code also contains a one-step control-barrier projection and a translational energy-tank filter. The direct comparison scripts do not engage or log those certificates. Moreover, the tank scales only the translational predictive-force channel and excludes feedforward, orientation, and null-space power. We therefore make no certified joint-limit or full-port passivity claim for the experiments below.

The QP runs at 100 or 500 Hz and the feedforward/realization loop at 1 kHz. OSQP [17] is warm-started and its preallocated matrices are updated with the current B_d , Jacobian, and torque offset. The optimization dimension is independent of joint count, but deployment still requires the robot model, full Jacobian, joint limits, and actuator limits.

IV. REAL-TIME REALIZATION

The controller is implemented at two rates. At every 1 kHz physics step, the robot model, reference acceleration, orientation term, and null-space term are updated. At a QP tick, the same measured state is used to update the recursive filter, rebuild the scheduled prediction and affine torque row, and solve for the first task-force move. That move is held until the next QP tick. The recursive filter's predict step in (9a) uses this QP-solved force directly, not a guard-adjusted value: if a runtime guard later alters the torque actually sent to the robot, the resulting mismatch is absorbed as apparent disturbance at the next measurement update rather than fed back explicitly. Section V confirms this distinction is immaterial for the reported benchmarks, where the raw limit excess stays below the saturation threshold throughout; it would matter under sustained, deliberate guard activation.

The per-tick sequence is:

- 1) compute $M, C, G, J_v, J_w, \Lambda$ and the measured error y_k ;
- 2) predict and correct $(\hat{z}_k, P_k)$ using the QP-solved task-force correction from the previous tick;
- 3) form $\Phi, \Gamma, D_{\text{bar}}$ from the current $B_d(q_k)$ and construct (H, h) from (12);
- 4) add the force box and complete first-move torque row (10c), warm-start OSQP, and solve;
- 5) assemble (3) and apply the configured runtime guards to the torque command sent to the robot.

TABLE I
PRINCIPAL CONTROLLER AND ESTIMATOR PARAMETERS

Quantity	Symbol	Value
Prediction horizon	N	10
QP period	Δt	10 ms (2 ms in C6–C7)
Inner realization period	—	1 ms
Position / velocity weights	Q_p, Q_v	$2 \times 10^4 I_3, 50 I_3$
Terminal scale / effort weight	γ, R	$5, 10^{-6} I_3$
Corrective-force bound	F_{max}	150 N per axis
FR3 joint-torque limits	τ_{max}	[87, 87, 87, 87, 12, 12, 12] Nm
Disturbance process variance	Q_w	$10 I_3$ (2 I_3 in C6–C7)
Position / velocity obs. variance	$R_e, R_{\hat{e}}$	$10^{-3} I_3, 10^{-2} I_3$
OSQP tolerances / iteration cap	—	$10^{-6} / 4000$

Table I records the parameters needed to reproduce the direct comparison. The optional workspace correction is disabled in the circular and waypoint controller comparisons and enabled only in the boundary experiment. The CBF and tank constants are intentionally omitted because those final filters do not support the headline results.

Three software checks protect the interface most likely to be implemented incorrectly. First, the condensed gradient includes $\bar{R}d_N$; omitting it changes the intended input-centered cost. Second, the torque bound is applied to $\tau_{\text{base}} + J_v^\top F_{\text{mpc},0}$, not only to the corrective force. Third, the benchmark logs raw and applied torque separately, using a 10^{-3} Nm excess threshold so numerical QP tolerances are not mislabeled as physical saturation.

V. SIMULATION EVALUATION

All experiments use the MuJoCo Menagerie FR3 [18], [19] at 1 kHz with joint-torque limits [87, 87, 87, 87, 12, 12, 12] Nm. A 12 cm XZ circle is traversed in 8 s while a 15 N downward step is applied for 3 s of each cycle. The MPC horizon is $N = 10$, the nominal impedance stiffness is 300 N/m, and all reported fair comparators use the same plant and physical torque budget.

A. Estimator and update-rate ablation

Table II separates estimator and update-rate effects. C4 and C5 have identical horizon, weights, rate, and torque interface; only the augmented disturbance estimator differs. At 100 Hz it reduces steady-state error from 2.77 to 0.042 mm. Q_w is scaled by the QP period between the 100 Hz and 500 Hz configurations (Table I) so the continuous-time-equivalent process-noise density, not just the raw discrete value, is held constant across the rate comparison; C6/C7 use the correspondingly smaller $Q_w = 2 I_3$. Raising the rate mainly reduces the contact transient in this protocol, while the estimator primarily removes the constant-load offset; the effects are not claimed to be orthogonal in general.

B. Broad baseline screen

Before stiffness/damping calibration, we screen the controller against four common interaction behaviors using the nominal 300 N/m impedance setting. The admittance controller has a 100 N/m virtual spring; PI impedance adds an integral state to the nominal impedance; and predictive variable

TABLE II
CONTROLLED MPC ABLATION, 15 N REPEATED STEP

Controller	Rate (Hz)	Contact RMS (mm)	Peak (mm)	SS error (mm)
C4: DI-MPC, no estimator	100	2.20	2.92	2.77
C5: DI-MPC + estimator	100	0.53	2.58	0.042
C6: DI-MPC, no estimator	500	0.80	1.10	1.10
C7: DI-MPC + estimator	500	0.32	1.48	0.029

TABLE III
BROAD SCREEN ON THE 12 CM CIRCLE AND 15 N STEP

Controller	Total RMS (mm)	Contact RMS (mm)	Peak (mm)	SS error (mm)
Impedance, 300 N/m	35.6	41.1	51.8	44.8
Admittance, 100 N/m	113.9	174.7	210.5	186.7
PI impedance	36.2	27.4	43.7	21.4
Predictive variable imp.	12.9	4.5	7.5	4.8
C4: DI-MPC 100 Hz	11.4	2.2	2.9	2.8
C5: DI-MPC + est. 100 Hz	11.4	0.5	2.6	< 0.05
C6: DI-MPC 500 Hz	12.8	0.8	1.1	1.1
C7: DI-MPC + est. 500 Hz	12.7	0.32	1.48	0.029

impedance uses the disturbance estimate to schedule finite stiffness without cancelling the load. Table III reports three cycles and all controllers. It is included to show behavior across design classes, but comparisons between rows with different effective stiffness are descriptive rather than causal.

The broad screen makes two mechanism-level points. The predictive variable-impedance row improves on reactive finite-stiffness controllers but retains a 4.8 mm bias because scheduling stiffness does not provide an internal model of a constant load. At fixed MPC rate and tuning, C4 versus C5 and C6 versus C7 show the repeatable estimator effect; the large admittance displacement simply reflects its $15/100 = 150$ mm virtual-spring equilibrium, its chosen yielding behavior for this reference-holding task.

C. Stiffness-and-Damping-Calibrated Fair Comparison

The nominal 300 N/m impedance is intentionally compliant, so its comparison with C4 is gain-confounded. A separate calibration estimates C4's equilibrium stiffness as 5441 N/m, then searches stiffness scales (0.8, 1.0, 1.2) and damping ratios (0.7, 1.0, 1.3) on one cycle. It selects 5441 N/m and $\zeta = 1.3$. This calibration matches equilibrium stiffness and a scalar damping ratio on the calibration cycle only; it is not a full frequency-response match, and does not guarantee matched rise time, overshoot, or multiaxis coupling. A torque-aware PI baseline is tuned independently over nine integral-gain/limit pairs. We also provide the matched impedance with ideal simulated-force cancellation filtered at 50 ms; this is a favorable sensor-based comparator, not a reproduction of a particular published controller. Metrics in Table IV use three evaluation cycles of the same periodic trajectory, not independently randomized scenarios.

The calibrated impedance and C4 have similar steady-state errors (2.59 and 2.77 mm), so the nominal impedance/C4 ratio is not an architectural result. Their resource use differs: the matched impedance reaches 378.2 W peak positive joint power and exceeds a physical torque limit in 0.45% of samples,

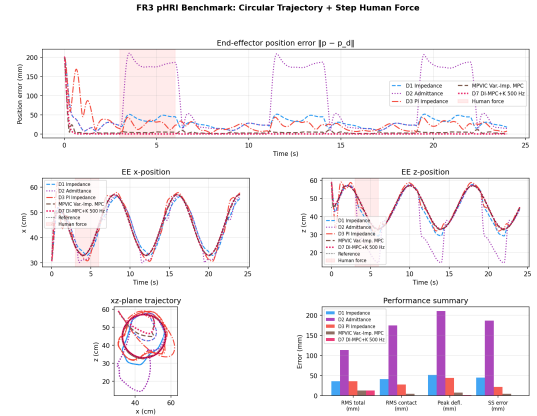


Fig. 1. Representative trajectories from the broad screen. The compliant admittance response is intentional; its large displacement is not a failure for a guidance task, but it is unsuitable for the reference-holding objective studied here. The calibrated-impedance study below removes the largest stiffness confound between impedance and MPC.

TABLE IV
FAIR COMPARISON UNDER A COMMON ACTUATOR BUDGET

Controller	Contact RMS (mm)	SS (mm)	Raw-limit excess (%)	Peak P^+ (W)
Nominal impedance	41.07	44.82	0	22.5
Calibrated impedance	2.38	2.59	0.45	378.2
Tuned anti-windup PI	27.10	20.38	0	58.3
Matched imp. + force FF	1.40	1.39	0.45	378.2
C4: DI-MPC 100 Hz	2.20	2.77	0	113.2
C5: DI-MPC + est. 100 Hz	0.53	0.042	0	113.1

compared with 113.2 W and no thresholded saturation for C4. C4 and C5 each complete 2400 QP solves without failure; their maximum raw limit excesses are below 2×10^{-5} Nm, beneath the 10^{-3} Nm saturation threshold. Adding the estimator reduces steady-state error by $65.8\times$ without increasing peak positive joint power. Ideal measured-force cancellation confirms that constant-load rejection is not unique to MPC; C5's distinction in this test is achieving 0.042 mm without a force measurement.

D. Loss of corrective authority

The comparison above assumes the QP always retains its full corrective authority; we next test what happens when that authority is deliberately restricted. In the standard realization, the QP output is the entire translational feedback term. If its force box is tightened toward zero, the commanded translation channel approaches feedforward-only cancellation and retains no restoring stiffness. This is a meaningful deployment failure mode even though it is outside the nominal $F_{\max} = 150$ N benchmark. We therefore test an optional architecture, C8, that places a fixed damped backbone outside the optimizer,

$$F_{bb} = K_{bb}e + D_{bb}\dot{e}, \quad K_{bb} = 300I_3 \text{ N/m}, \quad (18)$$

and lets the QP choose only an additive bounded correction. The full command $F_{bb} + F_{mpc}$ is included in the torque-feasibility rows. Unlike the default controller, C8 repeats a frozen-current-configuration torque row at every horizon step. This is a local realizability approximation, not an exact future joint-space rollout.

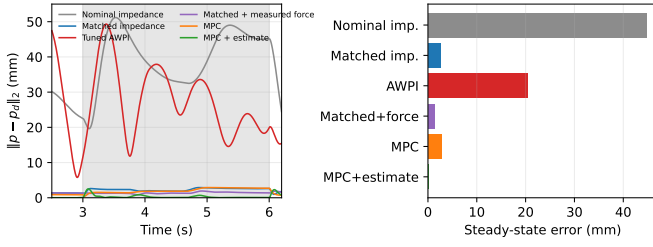


Fig. 2. Evaluation-cycle fair comparison. Stiffness/damping calibration closes the nominal impedance/C4 steady-state gap. The controlled C4–C5 pair isolates the disturbance augmentation; ideal measured-force feedforward also reduces the load-axis bias but retains the matched impedance’s saturation and power cost.

TABLE V
CORRECTIVE-AUTHORITY STRESS TEST: CONTACT RMS / PEAK (MM)

$F_{\max}$ (N)	150	20	5	1	0
C7 RMS	0.32	0.32	317.9	416.1	430.0
C7 peak	1.48	1.47	412.4	554.3	565.9
C8 RMS	0.32	0.32	41.3	69.8	78.5
C8 peak	1.47	1.47	53.5	95.8	109.3

At 150 and 20 N, C8 matches C7 to the reported precision; the backbone does not cost nominal performance because it replaces force that the unconstrained QP would otherwise generate. At 5 N and below, both controllers degrade severely, but C8’s retained stiffness reduces contact RMS by 5.5–7.7 times over this 24 s protocol. At $F_{\max} = 0$, C8 still has 78.5 mm contact RMS: the backbone improves graceful degradation but cannot reproduce offset-free control without additive correction. This finite-duration stress test is not a boundedness, recursive-feasibility, or actuator-fault guarantee. It does, however, expose a practical distinction between limiting an optional predictive correction and limiting the controller’s entire restoring action.

E. Waypoint generalization

A second task checks whether the conclusion is specific to a periodic circle. The end effector visits three waypoints forming a triangle. At each waypoint, a 15 N push in a different direction begins 0.8 s after arrival and lasts 2 s; the robot must then dwell within 35 mm of the target for 1 s. All controllers reach all three waypoints. Table VI repeats the controlled 100 Hz estimator ablation: contact RMS falls from 2.2 to 0.6 mm when the disturbance state is enabled. At 500 Hz the estimator continues to reduce contact RMS (0.8 to 0.37 mm) but, under the rate-proportional Q_w scaling of Table I, no longer has the lowest peak error: C6’s 1.0 mm undercuts C7’s 1.42 mm, mirroring the same pattern in Table III.

The predictive variable-impedance comparator rolls out the same horizon and uses $\hat{d}$ only to choose a stiffness from $\{200, 400, 800, 1500, 3000\}$ N/m; it does not subtract the estimated load. It is an in-house scheduler in the family of predictive variable-impedance methods [20], [21], not a reproduction of a published implementation. Its 5.0 mm result therefore supports only the mechanism-level observation that adapting a finite stiffness leaves a load-dependent offset. The large free-

TABLE VI
THREE-WAYPOINT HOLD UNDER DIRECTIONALLY VARIED PUSHES

Controller	Waypoints reached	Free RMS (mm)	Contact RMS (mm)	Peak (mm)
Stiff impedance	3/3	63.6	41.4	47.1
Predictive variable imp.	3/3	51.2	5.0	6.0
C4: DI-MPC 100 Hz	3/3	47.9	2.2	2.6
C5: DI-MPC + est. 100 Hz	3/3	47.9	0.6	2.4
C6: DI-MPC 500 Hz	3/3	51.9	0.8	1.0
C7: DI-MPC + est. 500 Hz	3/3	51.5	0.37	1.42

TABLE VII
FREE-SPACE CIRCLE GENERALIZATION, $R = 12$ CM, $T = 8$ S

Circle plane	Nominal impedance RMS (mm)	C5 RMS (mm)
XZ sagittal	23.54	0.24
XY horizontal	25.06	0.33
YZ frontal	16.25	0.21
Tilted XZ-to-XY	25.07	0.31

motion errors across methods include waypoint travel and are not a measure of contact regulation.

The moving-reference behavior is also checked on four circle planes without plane-specific retuning (Table VII). C5 remains below 0.35 mm free-space RMS on every plane. The much larger nominal-impedance errors reflect the same stiffness confound noted above; the table evidences directional consistency of the scheduled operational-space model, not a performance ratio.

F. Time-varying interaction and horizon validity

The random-walk model predicts d as constant over the short horizon; we test that approximation at a static target under $F_z = -12 \sin(2\pi ft)$ N for $f \in \{0, 0.1, 0.2, 0.4, 0.8\}$ Hz, reconstructing the aggregate ground-truth disturbance from the simulator dynamics and applied correction. Across all five rates, the measured N -step prediction error stays below the bound of (14), and contact tracking degrades gracefully with disturbance rate, from 0.08 mm at $f = 0$ to 1.04 mm at $f = 0.8$ Hz (full per-rate table in the journal version). This experiment checks the finite-horizon arithmetic for the simulator protocol; it is not a robustness bound for unmodelled contact, delay, or hardware sensing.

G. Force magnitude and shape

The circular experiment is repeated with sustained loads from 5 to 25 N to check the operating range of the offset claim (Table VIII). For C7, steady-state deflection remains approximately 0.023 mm throughout the tested unsaturated range, whereas first-contact peak error increases from 0.57 to 2.45 mm. The estimator cancels a constant force after convergence, but it cannot cancel an unseen step at its first sample; this separates steady-state offset rejection from transient compliance. The reported SS value is load-independent by construction rather than a rounding artifact: Proposition 1 predicts rejection in expectation for any constant d , so this near-constant ≈ 0.023 mm reflects a load-independent

TABLE VIII
SUSTAINED-FORCE SWEEP: STEADY-STATE / PEAK ERROR (MM)

Applied load (N)	5	10	15	20	25
Nominal impedance, SS	26.9	33.7	45.0	58.5	73.1
Nominal impedance, peak	28.4	37.0	51.2	70.1	88.9
C7, SS	0.024	0.023	0.023	0.023	0.023
C7, peak	0.57	0.96	1.46	1.96	2.45

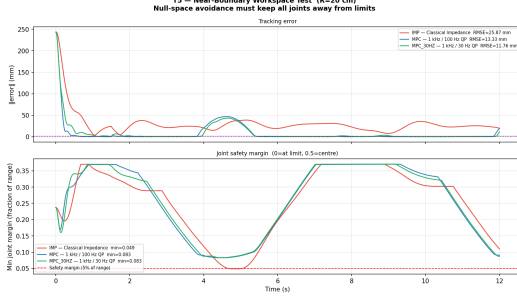


Fig. 3. Boundary-circle trajectories. The workspace correction trades tracking accuracy for clearance: the nominal impedance crosses the selected 5% fractional margin (minimum 0.049), whereas C5 maintains 0.083 in this test. The plotted result exercises the soft mechanisms in (16)–(17), not the optional CBF.

numerical/ discretization, trajectory-tracking, and estimator-fluctuation floor, not a residual scaling with the applied force.

At 15 N, changing the force profile from a step to a linear ramp lowers C7 contact RMS from 0.32 to 0.19 mm and peak error from 1.46 to 0.57 mm. A 1 Hz sinusoid raises contact RMS to 0.87 mm while peak error is a comparable 1.30 mm. These results agree with the direct prediction study: smoother onset reduces the unobserved transient, while a persistent time-varying load exposes the bandwidth limit of the random-walk estimator. They do not imply amplitude-independent performance after the 150 N force box or joint-torque limits become active.

H. Boundary and robustness checks

The 20 cm boundary circle deliberately exercises the soft null-space barrier and workspace projection, not the final CBF. Nominal impedance reaches a fractional joint margin of 0.049 and crosses the chosen 5% threshold; C5 maintains 0.083 at both 100 and 30 Hz, with 13.33 and 11.76 mm tracking RMSE. This is empirical avoidance under the stated trajectory, not forward-invariant safety certification.

Position-noise results average five seeds and model only end-effector position noise; velocity noise, delay, and force-sensor noise are absent. The inertia test perturbs only the controller’s feedforward model while the plant remains unchanged. These tests show numerical tolerance over the selected ranges, not robust-stability guarantees.

VI. DISCUSSION AND CONCLUSION

The proposed interface separates a behavior-coordinate request from its robot-specific torque realization. Operational-space cancellation gives a constant- A_d error predictor; force-domain augmentation aligns the estimate, horizon model, and balancing input; and the affine first-move constraint acts on

TABLE IX
C5 ROBUSTNESS CHECKS (100 Hz QP)

Position noise 1σ (mm)	0	1	2	5
10 N-step SS error (mm)	0.08	$0.19 \pm .03$	$0.37 \pm .04$	$0.89 \pm .07$
Controller inertia error	0%	+10%	+20%	+30%
Circle RMSE, estimator on (mm)	0.24	0.24	0.24	0.23
Circle RMSE, estimator off (mm)	0.94	0.86	0.79	0.73

the complete applied torque. The C4–C5 ablation attributes a $65.8\times$ steady-state improvement to disturbance augmentation under identical MPC tuning. Stiffness/damping calibration also shows that much of the nominal impedance-versus-MPC gap is simply stiffness, while ideal force cancellation confirms that offset rejection is not unique to predictive control.

Where this places the contribution. The double-integrator representation is a general pattern for physical interaction, not one particular to a fixed base: in selected task coordinates, after nominal dynamic compensation, interaction reduces to a fixed linear system driven by a single disturbance state, which is what makes it a predictive quantity rather than a property re-modeled per contact or configuration. In a model-based Physical AI stack — perception and planning reasoning about the world and the task, and a fast interaction interface turning that into torque — this paper establishes the base case of that shared representation: a single fixed contact point, exact in force coordinates. “Physical AI” names that placement; it is not an additional experimental claim. We call the shared double-integrator, force-domain representation itself **Interaction Dynamics**; extending it to other embodiments and contact regimes (legged locomotion, multi-agent interaction, dexterous manipulation, continuum instruments) is not evaluated in this paper.

The evidence remains limited to torque-controlled FR3 simulation. The predictor lumps human force and model error, assumes accurate position and velocity feedback, and provides a frozen-configuration offset result. The boundary test is not a CBF certificate, and the optional energy tank does not establish full-port passivity. Hardware evaluation should compare against a canonical predictive interaction controller under shared tuning while logging force estimates, applied torque, solver status, safety-filter slack, and energy state.

REFERENCES

- [1] N. Hogan, “Impedance control: An approach to manipulation—Parts I–III,” *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [2] S. Chiaverini, B. Siciliano, and L. Villani, “A survey of robot interaction control schemes with experimental comparison,” *IEEE/ASME Trans. Mechatronics*, vol. 4, no. 3, pp. 273–285, 1999.
- [3] Y.-Y. Cao, Z. Lin, and D. G. Ward, “Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances,” *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [4] —, “An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation,” *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [5] T. Gold, A. Völz, and K. Graichen, “Model predictive interaction control for robotic manipulation tasks,” *IEEE Trans. Robot.*, vol. 39, no. 1, pp. 76–89, 2023.
- [6] Y. Chen, C. Li, T. Teng, X. Wu, D. Xu, Y.-H. Liu, and F. Chen, “Unified model predictive interaction control integrating impedance matching and constraint optimization,” in *Proc. IEEE Int. Conf. Control Autom. (ICCA)*, 2025, pp. 372–378.

- [7] K. Haninger, C. Hegeler, and L. Peternel, "Model predictive impedance control with Gaussian processes for human and environment interaction," *Robotics and Autonomous Systems*, vol. 165, p. 104431, 2023.
- [8] A. Jordana, S. Kleff, J. Carpentier, N. Mansard, and L. Righetti, "Force feedback model-predictive control via online estimation," in *Proc. IEEE ICRA*, 2024, pp. 11 503–11 509.
- [9] R. Cao, L. Cheng, and H. Li, "Passive model-predictive impedance control for safe physical human–robot interaction," *IEEE Trans. Cogn. Dev. Syst.*, vol. 16, no. 2, pp. 426–435, 2024.
- [10] J. Matschek, J. Bethge, and R. Findeisen, "Safe machine-learning-supported model predictive force and motion control in robotics," *IEEE Trans. Control Syst. Technol.*, vol. 31, no. 6, pp. 2380–2392, 2023.
- [11] S. Kleff, A. Meduri, R. Budhiraja, N. Mansard, and L. Righetti, "High-frequency nonlinear model predictive control of a manipulator," in *Proc. IEEE ICRA*, 2021.
- [12] G. Wang, Z. Lin, F. Min, D. Li, and N. Liu, "Ensuring safe physical HRI: Integrated MPC and ADRC for interaction control," *Actuators*, vol. 14, no. 12, p. 608, 2025.
- [13] G. Pannocchia and J. B. Rawlings, "Disturbance models for offset-free model-predictive control," *AIChE Journal*, vol. 49, no. 2, pp. 426–437, 2003.
- [14] Franka Robotics GmbH, "Franka research 3 (FR3) technical documentation," 2023, <https://frankaemika.github.io/docs>.
- [15] O. Khatib, "A unified approach for motion and force control of robot manipulators: The operational space formulation," *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [16] L. Sentis and O. Khatib, "Synthesis of whole-body behaviors through hierarchical control of behavioral primitives," *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [17] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, "OSQP: An operator splitting solver for quadratic programs," *Math. Program. Comput.*, vol. 12, no. 4, pp. 637–672, 2020.
- [18] Google DeepMind, "MuJoCo menagerie: A collection of physics-based simulation models," GitHub, 2022, https://github.com/google-deepmind/mujoco_menagerie.
- [19] E. Todorov, T. Erez, and Y. Tassa, "MuJoCo: A physics engine for model-based control," in *Proc. IEEE/RSJ IROS*, 2012, pp. 5026–5033.
- [20] J. Xue, W. Liang, Y. Wu, and T. H. Lee, "Model predictive variable impedance control towards safe robotic interaction in unknown disturbance-rich environments," *Robotics and Autonomous Systems*, vol. 189, p. 104961, 2025.
- [21] L. Roveda, N. Iannacci, F. Vicentini, N. Pedrocchi, F. Braghin, and L. M. Tosatti, "Optimal impedance via model predictive control for robot-aided rehabilitation," *Control Eng. Practice*, vol. 83, pp. 11–23, 2019.