

Toward Interaction Dynamics: A Predictive Framework for Safe Physical Human–Robot Interaction

Yongyan Cao¹ and Jinshan Tang²

Abstract—Safe physical human–robot interaction (pHRI) is fundamentally a problem of interaction dynamics: the robot must track a commanded motion, yield under human forces, respect actuator and joint limits, and stay predictable under persistent contact. Classical impedance control trades accuracy for safety—a sustained force produces the steady-state bias $e_\infty = -K_d^{-1}F_h$. We propose a predictive framework that makes the interaction error itself the modeled object: an operational-space feedforward cancels gravity and Coriolis terms and normalizes the task inertia, leaving a linear double-integrator backbone whose state-transition matrix is configuration-independent, with all robot dependence isolated in the input matrix. This converts nonlinear torque-controlled pHRI into a linear constrained-control problem, so offset-free tracking, actuator feasibility, workspace-wide stability, and sampled-data joint-limit safety follow with explicit assumptions. The online realization is a 30-variable convex QP at 100Hz with a Kalman filter that rejects persistent forces without steady-state error. In MuJoCo simulation of a 7-DOF Franka FR3, it attains sub-0.05mm steady-state error under a sustained 15N force versus 44.8mm for classical impedance, sub-millimeter tracking on four 3-D circles, and robustness to measurement noise and 30% inertial mismatch. Because the backbone reduces contact dynamics to a linear model with a known, fixed transition matrix, it offers an analytic interaction-dynamics prior for model-based physical AI, on which a learned model need only capture the residual uncertainty of human intent, contact, and environment.

Index Terms—Linear double integrator, impedance control, model predictive control, physical human–robot interaction, disturbance rejection, joint-limit safety, redundant manipulator.

I. INTRODUCTION

Robots are moving from structured, isolated workcells into continuous physical contact with people and unstructured environments—collaborative assembly, assistive and rehabilitation devices, surgical robots, and service robots all require the machine to stay safe and predictable while executing a precise task [1]–[3]. In these settings the quality of the physical interaction is not a secondary concern but a primary control objective.

Classical robot control is organized around *robot* dynamics: trajectory tracking, inverse dynamics, and whole-body control take the manipulator as the principal dynamical system and treat contact forces as external disturbances or constraints [4]. This is highly effective in free space but becomes restrictive once interaction dominates behavior, because the object

the controller reasons about—the robot’s configuration-space dynamics—is not the object the task cares about, namely the *interaction* at the contact port. This motivates a shift in modeling emphasis: rather than predict robot motion and react to interaction, we make the *interaction error dynamics*—the closed-loop relation among commanded motion, contact force, actuator and joint limits, and safety filters—the quantity that is explicitly modeled, predicted, and optimized. We call this perspective *interaction dynamics* (formalized in Definition 1), and this paper develops one concrete, offset-free predictive realization of it. We use the term in a deliberately specific modeling sense—the augmented error-and-force dynamics at the contact port taken as the object of prediction and constraint—not as a claim to a new physical phenomenon; it is closely related to the operational-space and error-dynamics formulations [4], [5] and differs from them in *what is treated as the modeled state* (the interaction error, not the configuration) rather than in the underlying mechanics. Within that scope, and rather than viewing robot control as predicting robot motion and reacting to contact, we advocate predicting the interaction evolution directly.

Impedance and admittance control are the dominant pHRI paradigms [6], [7]: they prescribe a desired dynamic relation between motion and contact force and are valued for their simplicity and physical transparency [1], [2]. Two limitations persist. First, they are fundamentally *reactive*—the desired port behavior is enforced by feedback after the force acts, and a fixed stiffness fixes the accuracy–safety trade-off: under a sustained force the steady-state deflection is $e_\infty = -K_d^{-1}F_h$ (a 15 N push through 300 N/m gives 50 mm), so stiffening for accuracy raises contact force [3] while integral action removes the bias only within a narrow stable-gain budget and is prone to windup [8], [9]. Second, task tracking, interaction shaping, and constraints are typically designed in separate modules, precluding a single optimization.

Model predictive control (MPC) addresses the second gap by folding constraints, actuator limits, and future prediction into one optimization [10], [11], and offset-free MPC removes steady-state error by augmenting an integrating disturbance state estimated by a Kalman filter [12]. Yet most impedance-MPC formulations either optimize impedance *parameters*—which enter the prediction nonlinearly and cap update rates at 10–30 Hz [13]–[15]—or compensate the estimated disturbance only reactively at the current step [16]. Variable impedance methods [17], [18] adapt the apparent stiffness but likewise give no offset-free guarantee under persistent unknown force.

¹Y. Cao is with Voryx Robotic LLC, San Jose, CA 95136, USA (e-mail: yongyancao@gmail.com).

²J. Tang is with the Department of Health Administration and Policy, George Mason University, Fairfax, VA, USA (e-mail: jtang25@gmu.edu).

What is missing is a formulation in which the interaction error itself is the linear dynamical object exposed to standard constrained-control machinery.

Our hypothesis is that safe interaction is best posed on a predictive representation of the interaction error, in which impedance behavior is not a separate controller but an emergent property of the optimized dynamics. Computed-torque and operational-space linearization to a double integrator are classical [4], [5]; the contribution here is to make that reduction the *backbone* of the predictive interaction problem. An operational-space feedforward cancels gravity and Coriolis terms and normalizes the task through the operational-space inertia, leaving a residual task-error double integrator whose discrete state-transition matrix A_d is *constant*, with all robot configuration dependence isolated in the input matrix $B_d(\rho_k)$ —the scheduling-dependent structure familiar from LPV predictive control [19]. Three consequences follow: interaction shaping, disturbance rejection, and constraints live in one convex program; the persistent contact force is predicted and cancelled rather than merely reacted to; and, because A_d is configuration-independent, the free-response matrix is precomputed once, pointing toward interaction models that transfer across configurations.

This paper makes four contributions:

A predictive interaction-dynamics formulation. We recast torque-controlled pHRI so that the modeled and optimized object is the interaction error at the contact port—the augmented error state $x_{k+1} = A_d x_k + B_d(\rho_k) u_k + E \hat{d}_k$ (Definition 1)—rather than the robot configuration dynamics, unifying compliance, tracking, disturbance rejection, and safety in one convex program while preserving the measured robot dynamics through M , $C\dot{q} + G$, and J_v .

A configuration-independent state-transition matrix. Operational-space feedforward cancellation makes the transition matrix A_d *constant* across all configurations, with the entire robot dependence isolated in the input matrix $B_d(\rho_k)$ (the model as a whole is thus *not* configuration-independent—only its transition matrix is). This lets the free-response matrix be precomputed once and the online problem stay a fixed 30-variable QP at 100 Hz at every configuration, and it reduces closed-loop stability to a finite vertex LMI that certifies exponential stability of the interaction dynamics across the entire singularity-free workspace (Theorem 3) rather than only at a frozen configuration—the structural property that points toward interaction models transferable across configurations.

Offset-free predictive impedance. We prove (Theorem 1) that classical task-space impedance [6] is a *special case* of this framework—in the unconstrained, disturbance-free limit the predictive feedback reduces to it for the passive symmetric component of the realized gain—and (Theorem 2) that an input-centered augmented-Kalman disturbance state gives zero steady-state error under constant bounded human force when the stated stability and feasibility conditions hold, removing the fixed accuracy–safety trade-off of impedance control.

Safety and passivity integration. A null-space inverse-barrier potential [20], a one-step joint-limit control-barrier filter on the final applied torque, and an energy-tank scaling of the predictive task force provide practical joint-limit regulation

and sampled task-channel passivity, *conditional* on feasibility and per-sample enforcement.

On a 7-DOF Franka FR3 in MuJoCo simulation, the controller reduces steady-state error under a sustained 15 N force from 44.8 mm (classical impedance) to below 0.05 mm—a $>800\times$ reduction—while holding sub-millimeter tracking on four 3-D circles and remaining robust to measurement noise and 30% inertial mismatch. Although developed for pHRI, the interaction-dynamics backbone requires only M , $C\dot{q} + G$, and J_v , offering a path toward interaction models that transfer across configurations for manipulation and whole-body control; a full realization of that vision is left to future work.

This connects the present work to the broader agenda of *model-based physical AI*. Recent embodied systems couple a perception–language stack to a robot through a learned world model $x_{k+1} = f(x_k, u_k)$ that is rolled out for prediction and planning; the hardest part of that model is contact, precisely because the underlying dynamics $M(q)\ddot{q} + C\dot{q} + G = \tau + J^\top \mathcal{F}_h$ are nonlinear and configuration-dependent, which makes purely learned contact models data-hungry. The interaction-dynamics backbone offers an *analytic* alternative for the physical layer: operational-space cancellation reduces the contact dynamics to a linear model whose transition matrix is fixed and configuration-independent and whose robot dependence is a single known input matrix. A model-based agent built on this backbone need not re-learn robot dynamics; the residual left to a learned component is only the genuinely uncertain part—human intent, contact force, and environment—which enters through the disturbance channel the estimator already tracks. We do not claim a physical-AI system here; rather, we position an interaction-dynamics representation with a fixed, configuration-independent transition matrix as an analytic dynamics foundation on which such systems can predict, plan, and reason about safety under contact.

II. SYSTEM DYNAMICS AND PROBLEM FORMULATION

Consider an n -DOF torque-controlled serial manipulator; experiments use the Franka FR3 ($n = 7$) [21]. The rigid-body equations of motion are:

$$M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h \quad (1)$$

where $M(q)$ is the positive-definite inertia matrix; $C(q, \dot{q})\dot{q} + G(q)$ is the Coriolis-plus-gravity vector (available as `qfrc_bias` in MuJoCo or via the robot model API); τ is the commanded joint torque; and $\mathcal{F}_h \in \mathbb{R}^6$ is the human-applied wrench. $J(q) = [J_v^\top(q); J_\omega^\top(q)]^\top \in \mathbb{R}^{6 \times n}$ is the full geometric Jacobian, with $J_v \in \mathbb{R}^{3 \times n}$ the translational and $J_\omega \in \mathbb{R}^{3 \times n}$ the rotational sub-Jacobian [5]. $\mathcal{F}_h$ is defined as positive when the human pushes *onto* the robot, so it enters (1) with a positive sign, adding to the generalized force that accelerates the joints.

The translational Jacobian satisfies $\dot{p} = J_v(q)\dot{q}$ [5]. The operational-space inertia [4] is:

$$\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1} \in \mathbb{R}^{3 \times 3} \quad (2)$$

$\Lambda(q)$ is symmetric positive-definite. The dynamically-consistent pseudoinverse [4], [22] is $\bar{J}_v = M^{-1} J_v^\top \Lambda$, ensuring forces applied through $J_v^\top$ produce no null-space acceleration.

After feedforward cancellation (Section III-A), the human force and joint friction appear as an aggregated Cartesian acceleration disturbance $d(t)$, modelled as a random walk:

$$\dot{d} = w(t), \quad w \sim \mathcal{N}(0, Q_d) \quad (3)$$

capturing constant forces (sustained pushes, physiological tremor) and slow-varying loads (unmodelled payloads, tool changes). This decomposition is written in acceleration units; the estimator and QP of Section III-B operate on the equivalent *force-form* disturbance $-\Lambda(q)d$ (the quantity entering through $B_d(\rho_k)$ in (11)), which is constant for a constant human force and is the form realized in code.

Our control objective can be stated as follows. Design a torque law τ such that for any bounded persistent disturbance d :

- 1) $\|e(\infty)\| = 0$, where $e = p_d - p$ (zero steady-state error);
- 2) $\|e(t)\|$ is minimized over a finite prediction horizon;
- 3) $q_i \in [q_{\min,i} + \epsilon, q_{\max,i} - \epsilon]$ for all i when the one-step safety filter is enforced.

This objective is posed not on the robot configuration but on the interaction error at the contact port. We make that modeling shift precise.

Definition 1 (Interaction Dynamics). *We call interaction dynamics the closed-loop dynamical system whose state is the interaction error at the contact port—the task-tracking error and its rate, augmented by the persistent interaction force—and whose evolution, under the actuator, joint-limit, and passivity constraints, is driven by the task control input. Formally, where classical robot control takes the configuration-space dynamics $M(q)\ddot{q} + C(q, \dot{q})\dot{q} + G(q) = \tau + J^\top(q)\mathcal{F}_h$ as the object to be predicted and regulated, interaction dynamics takes the augmented error system*

$$x_{k+1} = A x_k + B u_k + E d_k$$

as the primary modeling object, with x_k the interaction error state, u_k the task force, and d_k the interaction disturbance.

What distinguishes this from a bare tracking-error double integrator is not the state equation in isolation but the *object* it defines: the error, the interaction force (as an estimated, internally-modeled disturbance state rather than an exogenous input), and the actuator, joint-limit, and passivity constraints are taken together as one predicted-and-optimized system. Plain error dynamics describe how a fixed controller's error evolves; the interaction dynamics of Definition 1 are the object the controller is designed on.

Section III-B constructs one concrete, offset-free realization of this object: the transition matrix $A = A_d$ is configuration-independent, the robot dependence is confined to $B = B_d(\rho_k)$, and E propagates the estimated interaction force. Modeling the *interaction* rather than the *configuration* is what lets compliance, tracking, disturbance rejection, and safety be posed as a single constrained optimization.

III. LINEAR DOUBLE-INTEGRATOR BACKBONE AND FINITE-HORIZON REALIZATION

A. Layer 1 — Feedforward Nonlinear Inversion

Classical Cartesian impedance control [6] commands:

$$\tau = C\dot{q} + G + J_v^\top (\Lambda \ddot{p}_d + \mu - K_d e - D_d \dot{e})$$

where $\mu = \Lambda J_v M^{-1} C \dot{q} - \Lambda \dot{J}_v \dot{q}$ collects task-space Coriolis and centripetal terms [4], embedding the full impedance law inside a single static feedback. This treats F_h as a disturbance to be passively rejected with no predictive look-ahead and no mechanism to drive steady-state error to zero.

The proposed Layer 1 explicitly separates these concerns. Following the operational-space decomposition of [4], the full torque command is partitioned into four channels via the null-space projector $\bar{N} = I - \bar{J}J$ [22], where $\bar{J} = M^{-1} J^\top \Lambda_6$ is the dynamically-consistent pseudoinverse of the full 6-DOF pose Jacobian J and $\Lambda_6 = (J M^{-1} J^\top)^{-1} \in \mathbb{R}^{6 \times 6}$ is the full-pose operational-space inertia (both the translational MPC task and the orientation channel are actively controlled, so the projector annihilates the full pose task, not only its translational part):

$$\tau = \tau_{\text{ff}} + J_v^\top F_{\text{mpc}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}} \quad (4)$$

The feedforward term cancels all known nonlinearities using the computed-torque method [5]:

$$\tau_{\text{ff}} = \underbrace{C(q, \dot{q})\dot{q} + G(q)}_{\text{qfrc_bias}} + J_v^\top \Lambda(q) \ddot{p}_d \quad (5)$$

Writing the Layer-2 task channel as $\tau_{\text{mpc}} \equiv J_v^\top F_{\text{mpc}}$, define the known non-MPC torque offset

$$\tau_{\text{base}} = \tau_{\text{ff}} + J_\omega^\top F_{\text{orient}} + \bar{N}^\top \tau_{\text{null}}.$$

The final applied command is the joint torque $\tau = \tau_{\text{base}} + \tau_{\text{mpc}}$, which the hardware saturates at the per-joint actuator limit $|\tau_i| \leq \tau_{\max,i}$; Layer 2 constrains this applied receding-horizon torque, while the hardware interface keeps clipping and rate limiting as final runtime guards.

Proposition 1. *After applying (5), the residual error dynamics satisfy:*

$$\ddot{e} = -\Lambda^{-1}(q) F_{\text{mpc}} + d(t) \quad (6)$$

where $e = p_d - p$ and the aggregated disturbance is:

$$d(t) = \underbrace{-\Lambda^{-1}(q) \bar{J}_v^\top J^\top \mathcal{F}_h}_{\text{projected pMRI force}} - \underbrace{J_v M^{-1} J_\omega^\top F_{\text{orient}}}_{\text{orientation coupling}} - \underbrace{\dot{J}_v(q, \dot{q})\dot{q}}_{\text{Jacobian derivative}} + \underbrace{\epsilon_m(t)}_{\text{model error}} \quad (7)$$

where $\bar{J}_v^\top = \Lambda J_v M^{-1} \in \mathbb{R}^{3 \times n}$ and $J^\top \in \mathbb{R}^{n \times 6}$ is the full geometric Jacobian transpose, so $\bar{J}_v^\top J^\top \in \mathbb{R}^{3 \times 6}$ acts on the 6-D wrench $\mathcal{F}_h$ (equivalently the term is $-J_v M^{-1} J^\top \mathcal{F}_h$).

The four terms: (i) the *projected pMRI force* — for a purely translational $\mathcal{F}_h = [F_h^\top, 0]^\top$ this reduces to $-\Lambda^{-1} F_h$ in acceleration form (because $e = p_d - p$, any positive acceleration of p induced by the human force appears with a negative sign in $\ddot{e}$); (ii) the *orientation coupling* — residual translational acceleration from the simple additive orientation

PD. This mobility cross-term is generally structural, not a numerical artifact, and is absorbed by $\hat{d}$; (iii) the *Jacobian derivative* $-\dot{J}_v \dot{q}$, small at typical speeds; (iv) the *model error* $\epsilon_m(t)$ from imperfect gravity/Coriolis cancellation.

Remark 1 (Exactness of the reduction). *Under ideal cancellation the residual plant is exactly the double integrator (6); in practice the terms (ii)–(iv) are not identically zero. Rather than being neglected they are modelled as the disturbance $d(t)$, which the augmented Kalman state $\hat{d}$ estimates and the MPC rejects (Theorem 2). The reduction is thus a cancellation-plus-disturbance model, not an assumption of perfect inversion; the configuration dependence stays confined to $B_d(\rho_k)$ while A_d remains constant.*

B. Layer 2 — Discrete LPV Model and QP

With error state $x_e = [e^\top, \dot{e}^\top]^\top \in \mathbb{R}^6$ and scheduling variable $\rho_k = q_k$, discretization gives:

$$x_e(k+1) = \underbrace{\begin{bmatrix} I_3 & \Delta t I_3 \\ 0 & I_3 \end{bmatrix}}_{A_d \text{ (constant)}} x_e(k) + \underbrace{\begin{bmatrix} 0 \\ -\Lambda^{-1}(q)\Delta t \end{bmatrix}}_{B_d(\rho_k)} F_{\text{mpc}}(k) \quad (8)$$

Equation (8), together with the disturbance augmentation (11) below, is the interaction dynamics of Definition 1 in concrete form: the state x_e is the interaction error at the contact port—not the robot configuration—the input F_{mpc} is the task force, and $\hat{d}$ is the estimated interaction disturbance. Identifying $A = A_d$ and $B = B_d(\rho_k)$ gives the linear system $x_{k+1} = Ax_k + Bu_k + Ed_k$ of Definition 1; offset-free tracking, actuator feasibility, and joint-limit safety are properties of this model, not of the configuration dynamics.

Key structural result. The continuous-time matrix $A_c = \begin{bmatrix} 0 & I_3 \\ 0 & 0 \end{bmatrix}$ is nilpotent ($A_c^2 = 0$), so $e^{A_c \Delta t} = I + A_c \Delta t$ exactly and A_d is configuration-independent.

Discretization note on B_d . The input matrix in (8) uses Forward-Euler approximation. The exact ZOH integral gives $B_d^{\text{ZOH}} = [-\frac{\Delta t^2}{2}\Lambda^{-1}(q); -\Delta t\Lambda^{-1}(q)]^\top$; the neglected top-block is $O(\Delta t^2) \approx 2.5 \times 10^{-4} \text{ m/N}$ at 100 Hz, appearing as a known constant component of $\hat{d}$ (which does not bias the offset-free guarantee). Substituting the exact ZOH block removes the artifact without breaking the constant- A_d structure — only $B_d(\rho_k)$ rescales. Both Γ and the Kalman augmented state (11) must use the same B_d formula to avoid bias in $\hat{d}$; our implementation uses the Forward-Euler B_d consistently in both.

Remark 2 (Controllability and Detectability). *The LPV system (8) is uniformly controllable across the singularity-free workspace. Since $\Lambda(q) = (J_v M^{-1} J_v^\top)^{-1}$ is SPD for all q away from kinematic singularities, $B_d(\rho_k)$ has full column rank 3. The controllability matrix $\mathcal{C} = [B_d \mid A_d B_d]$ has rank 6, since:*

$$A_d B_d = \begin{bmatrix} I & \Delta t I \\ 0 & I \end{bmatrix} \begin{bmatrix} 0 \\ -\Lambda^{-1}(q)\Delta t \end{bmatrix} = \begin{bmatrix} -\Lambda^{-1}(q)\Delta t^2 \\ -\Lambda^{-1}(q)\Delta t \end{bmatrix}$$

and $\Lambda^{-1}(q)$ is full rank. If the stage penalty satisfies $Q \succeq 0$ and $(Q^{1/2}, A_d)$ is detectable, then the discrete-time

LQR/DARE solution exists at every fixed configuration and the corresponding gain $K_\infty = (R + B_d^\top P_\infty B_d)^{-1} B_d^\top P_\infty A_d$ is well-defined. For the augmented estimator, observability of $[e; \dot{e}]$ together with full column rank of B_d makes the constant disturbance state detectable: if a mode with eigenvalue λ is unobservable from $C = [I_6 \ 0]$, then its x_e component is zero; the augmented dynamics then require $B_d d = 0$, hence $d = 0$.

Implementation note (regularization). In code the operational-space inverse is formed as $\Lambda^{-1}(q) = J_v M^{-1} J_v^\top + \sigma I$ with $\sigma = 10^{-6}$ for numerical conditioning. This Tikhonov term is negligible in the well-conditioned workspace interior but mildly damps the estimated disturbance (and the realized stiffness) along directions that become ill-conditioned as a kinematic singularity is approached; operation is restricted to the singularity-free workspace, where its effect stays below the measurement-noise floor.

The receding-horizon QP with $N = 10$ steps, $3N = 30$ decision variables $U = [F_{\text{mpc}}(0); \dots; F_{\text{mpc}}(N-1)]$, is:

$$\min_U \frac{1}{2} U^\top H U + h^\top U \quad (9a)$$

$$\text{s.t. } -\tau_{\max} \leq \tau_{\text{base}}(0) + J_v^\top(q_0) F_{\text{mpc}}(0) \leq \tau_{\max}, \quad (9b)$$

$$-F_{\max} \leq F_{\text{mpc}}(k) \leq F_{\max}, \quad k = 0, \dots, N-1. \quad (9c)$$

with $H = \Gamma^\top \bar{Q} \Gamma + \bar{R}$, stage cost $Q = \text{blkdiag}(K_d, D_d)$, terminal cost $Q_f = \gamma Q$ ($\gamma = 5$), $\bar{Q} = \text{blkdiag}(Q, \dots, Q, Q_f)$, $\bar{R} = \text{blkdiag}(R, \dots, R)$. Let $d_N = \mathbf{1}_N \otimes \hat{d}$; the linear term is $h = \Gamma^\top \bar{Q} x_{\text{free}} + \bar{R} d_N$, corresponding to the offset-free input-centred effort penalty $\|U + d_N\|_{\bar{R}}^2$. The free response $x_{\text{free}} = \Phi x_e + D_{\text{bar}} \hat{d}$, where $D_{\text{bar}} \in \mathbb{R}^{6N \times 3}$ has j -th block $\sum_{l=0}^{j-1} A_d^l B_d(\rho_k)$; equivalently, $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$. Only $F_{\text{mpc}}(0)$ is applied (receding-horizon principle). **Constraint interpretation (feasible final control).** The final applied command is the joint torque $\tau = \tau_{\text{base}} + J_v^\top F_{\text{mpc}}(0)$, where τ_{base} contains feedforward, orientation, and null-space terms, which the hardware saturates at the per-joint actuator limit $\tau_{\max}$ (on the FR3, $\tau_{\max} = [87, 87, 87, 87, 12, 12, 12] \text{ Nm}$). Constraining only the correction, $\|F_{\text{mpc}}\|_\infty \leq F_{\max}$, would *not* keep τ within $\tau_{\max}$: it ignores the feedforward offset τ_{ff} (both $C\dot{q} + G$ and the inertial term $J_v^\top \Lambda \ddot{p}_d$, which on the FR3 dominate the budget), and it bounds a Cartesian force whereas the map $J_v^\top(q)$ to joint torque is configuration-dependent; any deficit would be absorbed by a downstream torque clip, i.e. *saturation*, discarding the optimized command. We therefore constrain the first applied receding-horizon torque directly, as in (9b). Since $\tau_{\text{base}}(0)$ and $J_v(q_0)$ are known at solve time, the constraint is affine in $F_{\text{mpc}}(0)$ — a convex per-joint polytope solved by OSQP at the same cost class as a box. As only the first move is applied, the nominal applied torque satisfies $|\tau_i| \leq \tau_{\max, i}$ whenever the QP is feasible. Runtime clipping and rate limiting remain as final safety guards; horizon-wide torque rows can be added but are not required for feasibility of the applied receding-horizon action. If an over-aggressive reference makes $\tau_{\text{base}}(0)$ alone exceed $\tau_{\max}$, the constraint is softened with a penalized slack $s \geq 0$ so the QP stays feasible and returns the minimum-violation command.

The following result establishes that classical impedance control is not a competitor to the proposed framework but

a special case of it: it is what the interaction dynamics reduce to once prediction, constraints, and disturbance augmentation are switched off.

Theorem 1 (Impedance Equivalence). *Fix a configuration and assume the input constraints are inactive and the disturbance estimate is zero. Then the first MPC move is a linear state feedback $F_{\text{mpc}} = K_e e + K_{\dot{e}} \dot{e}$. If the realized gain blocks are symmetric positive definite, or more generally have symmetric parts that define passive stiffness and damping, set $K_{\text{eff}} = \text{sym}(K_e) \succ 0$ and $D_{\text{eff}} = \text{sym}(K_{\dot{e}}) \succ 0$; the conservative part of the closed loop is the classical task-space impedance:*

$$\Lambda(q)\ddot{e} + D_{\text{eff}}\dot{e} + K_{\text{eff}}e = -F_h, \quad (10)$$

where F_h is the constant force-equivalent disturbance applied to the end effector.

Proof. With inactive constraints and $\hat{d} = 0$, (9) reduces to an unconstrained strictly convex quadratic because $H = \Gamma^\top \bar{Q}\Gamma + \bar{R} \succ 0$ when $\bar{R} \succ 0$. Its unique minimizer is

$$U^* = -H^{-1}\Gamma^\top \bar{Q}\Phi x_e.$$

Let $S = [I_3 \ 0 \ \cdots \ 0]$ select the first force block. The applied force is therefore

$$F_{\text{mpc}} = SU^* = \begin{bmatrix} K_e & K_{\dot{e}} \end{bmatrix} \begin{bmatrix} e \\ \dot{e} \end{bmatrix},$$

for fixed matrices $K_e, K_{\dot{e}}$ determined by $(A_d, B_d, \bar{Q}, \bar{R}, Q_f, N)$. Under the stated symmetry/sign condition, the symmetric parts define K_{eff} and D_{eff} . The exact linear closed loop is obtained with the full gains $K_e, K_{\dot{e}}$; only their symmetric parts admit the conservative spring-damper interpretation. The skew part of $K_{\dot{e}}$ is workless gyroscopic damping coupling, whereas the skew part of K_e is a circulatory position force and is not passive in general. These skew terms vanish in the common isotropic/commuting case and are otherwise treated as part of the stabilizing LQR feedback rather than as classical impedance parameters. The residual plant from Proposition 1 is $\ddot{e} = -\Lambda^{-1}F_{\text{mpc}} + d_{\text{acc}}$. For a translational constant human force represented in force form by $F_h = -\Lambda d_{\text{acc}}$, multiplication by Λ gives $\Lambda\ddot{e} = -F_{\text{mpc}} - F_h$. Substituting the linear feedback yields (10). $\square$

Thus the unconstrained MPC realizes a configuration-dependent linear impedance whenever the gain blocks have the passive stiffness/damping sign structure; constraints and disturbance augmentation are the mechanisms that extend this linear impedance behavior.

Remark 3 (Prescribed vs. realized gains). *The cost weights $Q = \text{blkdiag}(K_d, D_d)$, R are design penalties; the realized impedance $(K_{\text{eff}}, D_{\text{eff}})$ is their LQR image — a nonlinear (Riccati) map of (Q, R) — so in general $(K_{\text{eff}}, D_{\text{eff}}) \neq (K_d, D_d)$. The weights shape the realized impedance: the high-bandwidth tracking reported below corresponds to the stiff, well-damped K_{eff} the chosen (Q, R) induce. If a specific (K_d, D_d) must instead be matched exactly, the impedance gain can be prescribed directly ($F_{\text{mpc}} = K_d e + D_d \dot{e}$), rendering the equivalence exact for those gains at the cost of predictive*

look-ahead. We adopt the LQR form, for which Theorem 1 already establishes the analytical connection between the unconstrained MPC and a realized classical impedance.

Corollary 1 (Existence of a Gain-Scheduled Infinite-Horizon Implementation). *The infinite-horizon MPC admits a pure state-feedback realization $F_{\text{mpc}}(k) = -K_\infty(\rho_k)x_e(k)$. By Remark 2 the stabilizing DARE solution $P_\infty(\rho)$ exists for each fixed ρ under the stated detectability assumptions, and $K_\infty(\rho_k)$ depends on ρ_k only through $\Lambda^{-1}(q)$ — a symmetric 3×3 SPD matrix, so the scheduling space is the 6-D manifold of its independent entries. Since the stabilizing DARE solution is continuous in its coefficients, $K_\infty(\cdot)$ is continuous over this compact domain.*

Remark 4 (Practical 1 kHz implementation). *Continuity of K_∞ over a compact 6-D domain makes an offline-precomputed lookup attractive: the gain can be tabulated on a grid of $\Lambda^{-1}(q)$ values and interpolated, reducing the online cost to a single 3×6 matrix–vector product. We present this as a deployment option, not a validated result — grid density, interpolation error, and the resulting closed-loop quality are implementation choices we do not characterize here. The experiments instead run the finite-horizon QP (9) at 100 Hz with a 1 kHz inner loop, which also enforces the first applied torque constraint (9b) and exploits prediction look-ahead; a hardware demonstration of the 1 kHz law is future work.*

C. Kalman Disturbance Augmentation for Offset-Free Tracking

For the estimator we represent the disturbance in *force form*: the augmented state $d \in \mathbb{R}^3$ (units N) is the force-equivalent of the task-acceleration disturbance of the residual dynamics $\ddot{e} = -\Lambda^{-1}(q)F_{\text{mpc}} + d_{\text{acc}}$, related by $d = -\Lambda(q)d_{\text{acc}}$. This form enters the discrete model through the *same* input matrix $B_d(\rho_k)$ as the control F_{mpc} , and—unlike the acceleration form $d_{\text{acc}} = \Lambda^{-1}(q)(\cdot)$, which varies with configuration as $\Lambda(q)$ changes—it is constant for a constant human force, matching the constant-disturbance hypothesis of Theorem 2. It is the quantity the implementation stores as $\hat{d}$ and cancels via $F_{\text{mpc}} = -\hat{d}$ at steady state. Augment the state with this integrating disturbance, modelled as a random walk $d(k+1) = d(k) + w(k)$:

$$\begin{bmatrix} x_e(k+1) \\ d(k+1) \end{bmatrix} = \underbrace{\begin{bmatrix} A_d & B_d(\rho_k) \\ 0 & I_3 \end{bmatrix}}_{A_{\text{aug}}} \begin{bmatrix} x_e(k) \\ d(k) \end{bmatrix} + \begin{bmatrix} B_d(\rho_k) \\ 0 \end{bmatrix} F_{\text{mpc}}(k) + \begin{bmatrix} 0 \\ w(k) \end{bmatrix}, \quad (11)$$

with $w \sim \mathcal{N}(0, Q_w)$. The integrating block (eigenvalues at 1) delivers offset-free rejection of constant disturbances by the internal-model principle, while the process noise w lets the filter track slowly-varying disturbances. A steady-state Kalman filter observing $[e; \dot{e}]$ produces the estimate $\hat{d}$ of d via the innovation; it is not frozen but converges to the true disturbance. Both e and $\dot{e}$ are measured directly (position from forward kinematics, velocity from $J_v \dot{q}$), so $C = [I_6 \ 0]$ and the

filter is 9-dimensional — the 6 error states and the 3 integrating disturbance states, with no extra velocity-estimation states. The estimate $\hat{d}$ enters the free response, pre-compensating the QP before the disturbance accumulates in the error state.

Implementation note (process-noise scaling). The random-walk covariance Q_w is a fixed tuning constant in the present implementation. For a disturbance-tracking bandwidth invariant to the QP rate it should scale with the sample time, $Q_w = Q_d \Delta t$ (the exact discretization of the continuous random walk (3)); the single constant used here behaves well across the 100–500 Hz range tested.

Theorem 2 (Offset-Free Steady-State Tracking). *Consider the augmented model (11) at a fixed configuration, with constant disturbance $d(k) = d_\infty$. Assume: (i) the augmented estimator is detectable and its estimation error is asymptotically stable, so $\hat{d}(k) \rightarrow d_\infty$; (ii) the receding horizon controller stabilizes the nominal augmented closed loop; and (iii) the input constraint is inactive at the steady state. Then the steady-state tracking error is zero: $\lim_{k \rightarrow \infty} e(k) = 0$. If $d(k) \rightarrow d_\infty$ asymptotically, the same conclusion holds provided the estimator remains asymptotically tracking.*

Proof. Let $\hat{d}_N = \mathbf{1}_N \otimes \hat{d}$ and define the centred input sequence $V = U + \hat{d}_N$. Since $D_{\text{bar}} = \Gamma(\mathbf{1}_N \otimes I_3)$, the identity

$$\Phi x_e + D_{\text{bar}} \hat{d} + \Gamma U = \Phi x_e + \Gamma V$$

holds for any disturbance estimate $\hat{d}$, not only at steady state. The unconstrained cost can therefore be written, up to constants, as

$$\frac{1}{2}(\Phi x_e + \Gamma V)^\top \bar{Q}(\Phi x_e + \Gamma V) + \frac{1}{2}V^\top \bar{R}V.$$

Thus the nominal controller is exactly the stabilizing linear regulator for the disturbance-free backbone in the variable V : $V^* = -Kx_e$. The applied first input is therefore $F_{\text{mpc}} = v_0 - \hat{d}$, and the plant evolves as

$$x_e^+ = (A_d - B_d K_0)x_e + B_d(d_\infty - \hat{d}),$$

where K_0 is the first block row of K . By assumption (ii), the nominal closed loop is asymptotically stable. By assumption (i), the additive input $B_d(d_\infty - \hat{d})$ vanishes, so the stable linear system converges to the same equilibrium. Hence $x_e(k) \rightarrow 0$ and therefore $e(k) \rightarrow 0$.

The theorem does not claim zero error for arbitrary non-convergent time-varying forces or for steady states that require sustained actuator saturation; those cases require a separate invariant-set or anti-windup analysis. $\square$

Remark 5 (Frozen-configuration scope). *Theorem 2 is a frozen-configuration offset-free result: it fixes $\rho_k = q$ so that $B_d(\rho_k)$ and the regulator gain are constant. Theorem 3 removes this caveat, certifying that the closed-loop interaction dynamics are exponentially stable along any configuration trajectory in the workspace; the moving-reference experiments in Section VI then illustrate that guarantee, with the offset-free property holding at each sustained-contact configuration the trajectory visits.*

Theorem 3 (Workspace Stability of the Interaction Dynamics). *Consider the LPV interaction dynamics $x_e(k+1) =$*

$A_d x_e(k) + B_d(\rho_k) F_{\text{mpc}}(k)$ with constant A_d and $B_d(\rho) = [0; -\Lambda^{-1}(q)(\rho)\Delta t]$, and suppose $\Lambda^{-1}(q)(q)$ lies in a compact polytope over the singularity-free workspace, $\Lambda^{-1}(q)(q) \in \mathcal{P} = \text{conv}\{L_1, \dots, L_V\}$ (e.g. the entry-wise box with $0 \prec \lambda_{\min} I \preceq \Lambda^{-1}(q) \preceq \lambda_{\max} I$), with vertex input matrices $B_v = [0; -L_v \Delta t]$. If there exist $Q = Q^\top \succ 0$ and $Y \in \mathbb{R}^{3 \times 6}$ such that for every vertex $v = 1, \dots, V$

$$\begin{bmatrix} Q & (A_d Q + B_v Y)^\top \\ A_d Q + B_v Y & Q \end{bmatrix} \succ 0, \quad (12)$$

then the fixed feedback $F_{\text{mpc}} = Kx_e$, $K = YQ^{-1}$, makes $V(x) = x^\top P x$, $P = Q^{-1}$, a common quadratic Lyapunov function ($V(x_e(k+1)) \leq \gamma V(x_e(k))$, $\gamma < 1$) for every admissible configuration trajectory $\{\rho_k\}$; the interaction error is thus exponentially stable uniformly over the workspace, not only at a frozen configuration.

Proof. $B_d(\rho)$ is affine in $\Lambda^{-1}(q)(\rho)$, so for $\Lambda^{-1}(q)(\rho) = \sum_v \alpha_v L_v$ ($\alpha_v \geq 0, \sum_v \alpha_v = 1$), $A_d Q + B_d(\rho) Y = \sum_v \alpha_v (A_d Q + B_v Y)$. The block in (12) is affine in that quantity and the PSD cone is convex, so (12) holds for all $\rho \in \mathcal{P}$. A Schur complement gives $A_{\text{cl}}(\rho) Q A_{\text{cl}}(\rho)^\top \prec Q$ with $A_{\text{cl}}(\rho) = A_d + B_d(\rho) K$, i.e. $A_{\text{cl}}(\rho)^\top P A_{\text{cl}}(\rho) - P \prec 0$ with $P = Q^{-1}$, for all $\rho \in \mathcal{P}$. Hence V decreases along every trajectory irrespective of how ρ_k varies. Composing with the detectable integrating-disturbance estimator of Theorem 2 makes the tracking error offset-free at each constant-contact equilibrium the trajectory visits. $\square$

This is the workspace-level counterpart of the per-configuration DARE solvability (Remark 2) and the continuous scheduled law (Corollary 1): the constant A_d confines all configuration variation to the affine $B_d(\rho)$, making (12) a finite vertex program, so a single Lyapunov function certifies quadratic stabilizability of the interaction-dynamics representation across the entire workspace. As in Theorem 2, the certificate is for the predictive-plus-estimator core with the input constraint inactive; the conditional joint-limit and passivity filters (Theorem 4, Proposition 2) are enforced separately.

Remark 6 (Numerical certificate). *For the FR3, sampling $\Lambda^{-1}(q)(q)$ along both benchmarks (4600 samples) gives $\text{eig } \Lambda^{-1}(q) \in [0.059, 0.360] \text{ kg}^{-1}$ (task inertia 2.8–16.9 kg). Solving (12) over the resulting 64-vertex box ($\Delta t = 10 \text{ ms}$) is feasible, returning a common P with $\text{cond } P \approx 3.7$, closed-loop spectral radius ≤ 0.996 at every vertex, and $\max \text{eig}(A_{\text{cl}}^\top P A_{\text{cl}} - P) = -1.5 \times 10^{-3}$. The guaranteed common- P rate is conservative—the realized MPC converges much faster—but it establishes the workspace-stability claim rigorously rather than empirically.*

D. Disturbance Prediction Validity over the Horizon

A natural question for any offset-free MPC is how good the disturbance prediction is over the prediction horizon, not merely at the current step. The QP propagates the augmented model (8), (11) under the random-walk prediction $\hat{d}(k+i | k) = \hat{d}(k | k)$ — a flat extrapolation that is exact only for a strictly constant disturbance. For a time-varying human force

the prediction degrades with horizon depth i . We address this in three parts.

Bound. Assume the human force is Lipschitz in time, $\|\dot{d}(t)\|_2 \leq L_d$, and let $\|d(k) - \hat{d}(k | k)\|_2 \leq e_K$ be the steady-state Kalman estimation error. Since the random-walk prediction is the identity, the i -step prediction error obeys

$$\|d(k+i) - \hat{d}(k+i | k)\|_2 \leq e_K + L_d i \Delta t, \quad i = 0, \dots, N-1, \quad (13)$$

where L_d (units N/s) is the time-Lipschitz constant bounding the disturbance rate ($L_d \rightarrow 0$ for a sustained push, $L_d \approx 5$ N/s for a brisk guidance force) and e_K is the steady-state Kalman error; the bound follows by the triangle inequality on $d(k+i) = d(k) + \int \dot{d} d\tau$. The first term is the *current* estimation error (bounded by filter design, shrinking as the filter converges); the second is the *extrapolation* error, linear in horizon depth and unavoidable for any constant-disturbance internal model.

Why it is not load-bearing. Three properties keep (13) benign. (i) *Receding horizon*: only $F_{\text{mpc}}(0)$ is applied and the QP is re-solved every Δt with a fresh $\hat{d}(k | k)$, so the loose late-horizon predictions never reach the plant — they only shape the near-term optimum. (ii) *Short horizon*: at $N = 10$, $\Delta t = 10$ ms (100 ms; 20 ms at 500 Hz) the extrapolation term is small in absolute units — for a sustained push (the case of Theorem 2) $L_d \approx 0$ and the prediction is exact, while for a brisk voluntary guidance force at $\|\dot{F}_h\| \lesssim 5$ N/s the worst-case end-of-horizon error is $L_d N \Delta t \lesssim 0.5$ N, a small fraction of the available control authority. (iii) *Structured augmentation*: when the human force has known temporal structure — physiological tremor (8–12 Hz) or a slow guidance ramp — the random-walk block can be replaced by the corresponding internal model (a harmonic-oscillator state at the tremor frequency, or a constant-plus-ramp double integrator) so that the component is *predicted* forward exactly rather than extrapolated flat. This grows the estimator by a few states, leaves the constant- A_d error block (and hence the precomputed Φ) untouched, and removes that component from L_d in (13).

Metric. The natural diagnostic is the N -step disturbance-prediction RMS, $\varepsilon_N = \text{RMS}_k \|d(k) - \hat{d}(k | k - N)\|$ — the error of the estimate propagated N steps before the measurement — monitored alongside the one-step value ε_1 . For the step-force benchmark (Section VI) the disturbance is piecewise constant, so $\varepsilon_N \approx \varepsilon_1$ except across the force-onset transient; the gap $\varepsilon_N - \varepsilon_1$ isolates exactly the horizon-extrapolation error and is the quantity to watch when porting the controller to time-varying interaction; it is measured directly under time-varying forces in Table VIII, where it grows linearly with the disturbance rate as (13) predicts.

IV. ORIENTATION STABILIZATION AND NULL-SPACE CONTROL

A. Orientation Stabilization

Orientation is regulated by a PD law in operational space [4]. The axis-angle error $e_R \in \mathbb{R}^3$ is extracted from $R_d^T R$ [5]:

$$\tau_{\text{orient}} = J_{\omega}^T (-K_{\text{rot}} e_R - D_{\text{rot}} \omega) \quad (14)$$

with $K_{\text{rot}} = 20$ Nm/rad, $D_{\text{rot}} = 6$ Nm·s/rad, following the operational-space impedance structure of [2], [4]. This runs at 1 kHz and is decoupled from the translational QP through the null-space projector in (4).

B. Null-Space Joint-Limit Safety and Invariance

Because both the translational MPC channel and the orientation PD channel are actively controlled, the primary task is the full 6-DOF pose; for the FR3 ($n = 7$) this leaves $n - 6 = 1$ null-space DOF. The null-space torque $\bar{N}^T \tau_{\text{null}}$ (where $\bar{N} = I - \bar{J}J$ [4], [22] is the projector of the full pose Jacobian) does not affect end-effector position or orientation [22].

Null-space inverse-barrier. Joint-limit regulation via null-space repulsive potentials is a standard secondary objective [4], [20]. Define the clearance (in rad) to the nearest limit:

$$\phi_i(q) = \min(q_i - q_{\min,i}, q_{\max,i} - q_i) \geq 0$$

The inverse-barrier gradient [20]:

$$g_i(q) = \begin{cases} +k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right) & \phi_i < \delta_i, q_i \text{ near lower limit} \\ -k_b \left(\frac{1}{\phi_i} - \frac{1}{\delta_i} \right) & \phi_i < \delta_i, q_i \text{ near upper limit} \\ 0 & \text{otherwise} \end{cases} \quad (15)$$

with threshold $\delta_i = \eta(q_{\max,i} - q_{\min,i})$ ($\eta = 0.10$), $k_b = 50$ Nm. Combined with a centering spring [22]:

$$\tau_{\text{null}} = -k_{\text{null}}(q - q_0) + g(q) - d_{\text{null}}\dot{q} \quad (16)$$

with $k_{\text{null}} = 10$ Nm/rad, $d_{\text{null}} = 2$ Nm·s/rad, toward the FR3 neutral pose $q_0 = [0, -0.785, 0, -2.356, 0, 1.571, 0.785]^T$.

Task-space workspace projection. When joints approach limits, the null-space alone cannot prevent violations for task-constrained DOF [20]. We additionally project via the Jacobian pseudo-inverse [4]:

$$\delta p = k_{\text{ws}} (J_v J_v^T + \epsilon_r I)^{-1} J_v g(q), \quad \|\delta p\| \leq p_{\text{max}} \quad (17)$$

with $k_{\text{ws}} = 5 \times 10^{-4}$ m/(Nm/rad), $p_{\text{max}} = 0.06$ m, Tikhonov regularization $\epsilon_r = 10^{-8}$ [5]. The QP optimizes toward $p_{d,\text{eff}} = p_d + \delta p$.

Conditional sampled-data joint-limit filter. The dual-barrier controller above provides practical joint-limit regulation. A conditional forward-invariance certificate is obtained by adding a one-step joint-limit control-barrier filter to the commanded torque. Let

$$h_i^-(q) = q_i - q_{\min,i} - \epsilon, \quad h_i^+(q) = q_{\max,i} - \epsilon - q_i,$$

and define the certified safe set

$$\mathcal{C}_\epsilon = \{q : h_i^-(q) \geq 0, h_i^+(q) \geq 0, i = 1, \dots, n\}.$$

At sampling time k , approximate the next joint position under a constant torque over one servo period T_s by

$$q_{k+1|k} = q_k + T_s \dot{q}_k + \frac{1}{2} T_s^2 M^{-1}(q_k) (\tau_k + \hat{\tau}_{\text{ext},k} - b_k), \quad (18)$$

where $b_k = C(q_k, \dot{q}_k) \dot{q}_k + G(q_k)$, $\hat{\tau}_{\text{ext},k} = J^T(q_k) \hat{\mathcal{F}}_{h,k}$ is the measured or estimated external generalized force, and τ_k is the final command after the nominal MPC and null-space terms.

If no reliable external-force estimate is available, both the lower- and upper-limit inequalities in (19) should be robustly tightened using a bound on $\|\tau_{\text{ext}} - \hat{\tau}_{\text{ext}}\|$ propagated through $\frac{1}{2}T_s^2 M^{-1}(q_k)$. The safety filter selects the closest feasible torque to the nominal command subject to

$$h_i^\pm(q_{k+1|k}) \geq (1 - \alpha)h_i^\pm(q_k), \quad i = 1, \dots, n, \quad \alpha \in (0, 1]. \quad (19)$$

Since (18) is affine in τ_k , (19) adds linear inequalities to the final torque projection.

Theorem 4 (Sampled-Data Joint-Limit Invariance). *Assume $q_0 \in \mathcal{C}_\epsilon$, the model used in (18), including $\hat{\tau}_{\text{ext},k}$ or a valid two-sided robust tightening, matches the sampled plant at $k+1$ or encloses it within the tightened lower/upper bounds, and the safety-filter constraints (19) are feasible and enforced at every sample. Then $\mathcal{C}_\epsilon$ is forward invariant for the sampled joint positions: $q_k \in \mathcal{C}_\epsilon$ for all $k \geq 0$.*

Proof. Suppose $q_k \in \mathcal{C}_\epsilon$. Then $h_i^\pm(q_k) \geq 0$ for every joint. By (19),

$$h_i^\pm(q_{k+1}) = h_i^\pm(q_{k+1|k}) \geq (1 - \alpha)h_i^\pm(q_k) \geq 0,$$

where equality between q_{k+1} and $q_{k+1|k}$ follows from the one-step model-matching assumption. Hence $q_{k+1} \in \mathcal{C}_\epsilon$. Induction from $q_0 \in \mathcal{C}_\epsilon$ proves the claim. $\square$

The theorem is deliberately conditional: it certifies invariance only when the one-step constraints are feasible and enforced. In the implementation the filter is the *final* torque projection (after the nominal MPC and null-space terms), so it takes priority over the soft null-space barrier and workspace projection, which only *bias* the arm away from limits. When the constraints (19) cannot all be met — e.g., barrier and CBF pull in conflicting directions, or τ_{base} alone is already limit-inducing — they are relaxed with a penalized slack $s \geq 0$ ($\min \|\tau - \tau_{\text{nom}}\|^2 + w s^2$ s.t. $h_i^\pm(q_{k+1|k}) \geq (1 - \alpha)h_i^\pm(q_k) - s$), returning the minimum-violation command rather than reporting infeasibility; a logged $s = 0$ is exactly the per-sample certificate that the theorem held without relaxation. The experiments below report the empirical behavior of the dual-barrier joint-limit regulation law; hardware runs intended to claim certified joint-limit safety should log the CBF residuals and the slack s . The certificate is sampled-data: possible intersample motion is covered only to the extent that the margin ϵ and any robust tightening dominate the within-sample excursion.

C. Energy-Tank Passivity Layer for Co-Manipulation

The offset-free predictive controller is designed for precision disturbance rejection; intentional co-manipulation additionally needs a passivity certificate at the human-robot port. We add a sampled energy tank on the translational task channel. Let F_k^0 be the predictive task force before passivity filtering, $v_k = \dot{p}_k$ the measured end-effector translational velocity, and $E_k \in [E_{\min}, E_{\max}]$ the tank energy. The layer scales only the task force,

$$F_k = s_k F_k^0, \quad s_k \in [0, 1], \quad (20)$$

leaving feedforward, orientation, and null-space torques outside the tank accounting. Define $P_k^0 = \max\{(F_k^0)^\top v_k, 0\}$ and optional human recharge power

$$P_{h,k} = \gamma \max\{\hat{F}_{h,k}^\top v_k, 0\}, \quad \gamma \in [0, 1].$$

The scale is

$$s_k = \begin{cases} 1, & P_k^0 = 0, \\ \min\left(1, \frac{(E_k - E_{\min})/T_s + P_{h,k}}{P_k^0}\right), & P_k^0 > 0, \end{cases} \quad (21)$$

and the tank update is

$$E_{k+1} = \text{sat}_{[E_{\min}, E_{\max}]}(E_k + T_s(P_{h,k} - \max\{F_k^\top v_k, 0\})). \quad (22)$$

Proposition 2 (Sampled Passivity of the Task Channel). *If $E_0 \geq E_{\min}$ and (21)–(22) are enforced at every servo sample, then $E_k \geq E_{\min}$ for all k and*

$$\sum_{j=0}^{k-1} T_s \max\{F_j^\top v_j, 0\} \leq E_0 - E_{\min} + \sum_{j=0}^{k-1} T_s P_{h,j}.$$

Proof. By construction, (21) gives $T_s \max\{F_k^\top v_k, 0\} \leq E_k - E_{\min} + T_s P_{h,k}$. Substitution into (22) gives $E_{k+1} \geq E_{\min}$ before saturation, and the saturation preserves the lower bound. Summing the unsaturated balance gives the stated dissipation inequality. $\square$

The certificate is scoped to the translational task channel; the excluded channels are non-generative by construction, so leaving them outside the tank does not compromise it. The orientation channel is a passive PD ($K_{\text{rot}}, D_{\text{rot}} > 0$), the null-space torque only redistributes energy within the redundant subspace, and the feedforward gravity/Coriolis compensation is workless at steady state. A full 6-DOF port certificate that also bounds the rotational channel is a straightforward extension (a second tank on $(\tau_{\text{orient}}, \omega)$) that we do not pursue here.

In hardware logs, the certificate is the tuple `passivity_certified`, `passivity_energy`, and `passivity_scale`. The default $\gamma = 0$ gives a conservative certificate; $\gamma > 0$ allows a configured fraction of measured human input work to recharge the tank.

V. REAL-TIME IMPLEMENTATION

The two-layer architecture is robot-agnostic: Layer 1 requires only M , $C\dot{q} + G$, and J_v ; Layer 2 is a fixed-size QP independent of n . Reference implementation uses the Franka FR3 via FCI [21].

QP solver. We use OSQP [23] with warm-starting, which in our simulation implementation reduced cold-start latency from 5 ms to under 0.5 ms (single-threaded, commodity CPU; full timing statistics are future hardware work). Although $H = \Gamma^\top Q \Gamma + \bar{R}$ varies with configuration through $B_d(\rho_k)$, updating it requires only overwriting the pre-allocated non-zero elements of the upper-triangular CSC sparse matrix — a $O(N^2)$ coefficient update completed in under 0.05 ms via `osqp_update_P`, preserving OSQP's factorization-reuse structure. The linear term $h = \Gamma^\top Q x_{\text{free}} + \bar{R} d_N$ is updated

TABLE I
COMPUTATIONAL BUDGET PER CONTROL LAYER

Layer	Computation	Rate	Budget
Feedforward	$\tau_{ff}: \text{qfrc_bias} + J_v^T \Lambda \ddot{p}_d$	1 kHz	<0.1 ms
QP	OSQP, 30 vars, first torque row	100 Hz	<1 ms
Kalman	9-state predict + update	100 Hz	<0.1 ms
Orientation	$J_\omega^T (-K_{rot} e_R - D_{rot} \omega)$	1 kHz	<0.1 ms
Null-space	Barrier gradient + projection	1 kHz	<0.1 ms

TABLE II
BENCHMARKED CONTROLLERS

ID	Controller	Disturbance estimator
C1	Classical Impedance	—
C2	Admittance ($K_a = 100 \text{ N/m}$)	Virtual spring
C3	PI Impedance ($K_{int} = 80 \text{ N/(m}\cdot\text{s)}$)	Integral
MPVIC	Var.-Imp. MPC, 100 Hz	Kalman (sched.)
C4	DI-MPC, 100 Hz	None
C5	DI-MPC + Kalman, 100 Hz	Augmented Kalman
C6	DI-MPC, 500 Hz	None
C7	DI-MPC + Kalman, 500 Hz	Augmented Kalman

similarly via the OSQP linear-cost update; the $+ \bar{R}d_N$ term is required by the offset-free input-centering argument in Theorem 2.

ZOH policy. Between QP solves, F_{mpc} is held constant. Layer 1 (τ_{ff}) is recomputed at 1 kHz from fresh $(q, \dot{q})$, continuously cancelling gravity and Coriolis.

Simulation. All experiments use the FR3 model from MuJoCo Menagerie [24] with the MuJoCo physics engine [25] at 1 kHz. The hardware-path MuJoCo verification suite runs the same FR3 interface used for real deployment, including torque-rate limiting, the one-step CBF projection, and the energy-tank passivity filter; direct benchmark scripts are used only for algorithm comparisons and figures.

VI. EXPERIMENTS

A. Baseline Controllers

Here DI-MPC denotes the proposed double-integrator MPC realization. **MPVIC** is a predictive variable-impedance comparator in the class of [15], [17]: at each 100 Hz step it selects the apparent stiffness $K^* \in \{200, \dots, 3000\} \text{ N/m}$ by rolling out the double-integrator horizon and minimising a weighted sum of tracking error and task force, given the *same* disturbance estimate $\hat{d}$ used by the proposed controller. That estimate only *schedules* K^* ; it is not cancelled ($F_{mpc} = K^*e + D^*\dot{e}$, no $-\hat{d}$ term), isolating variable-impedance adaptation from offset-free augmentation. All controllers use $K_d = 300 \text{ N/m}$ nominal. The inner feedforward runs at 1 kHz for all variants. Tables report all controller variants for ablation completeness. For plot readability, the trajectory figures show only four representative curves: D1=C1/G1, D2=C2/G2, D3=C3/G3, and D7=C7/G7.

TABLE III
BENCHMARK I — CIRCULAR TRAJECTORY, 15 N STEP FORCE

Controller	RMS total [mm]	RMS contact [mm]	Peak defl. [mm]	SS err. [mm]
C1 – Impedance	35.6	41.1	51.8	44.8
C2 – Admittance	113.9	174.7	210.5	186.7
C3 – PI Impedance	36.2	27.4	43.7	21.4
MPVIC – Var.-Imp. MPC	12.8	4.5	7.5	4.8
C4 – MPC 100 Hz	11.4	2.2	2.9	2.8
C5 – MPC+K 100 Hz	11.4	0.5	2.5	<0.05
C6 – MPC 500 Hz	13.0	0.8	1.1	1.1
C7 – MPC+K 500 Hz	12.8	0.2	0.8	<0.05

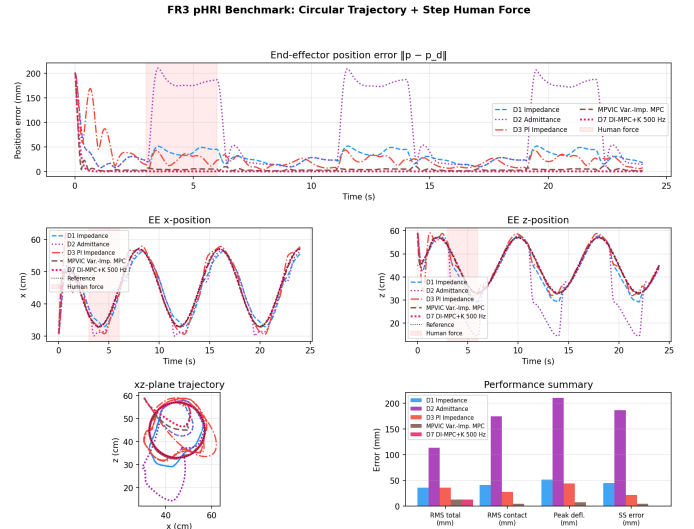


Fig. 1. Benchmark I — Circular trajectory under 15 N step pMRI. For visibility the plot shows D1/D2/D3/D7 (corresponding to C1/C2/C3/C7) plus the predictive variable-impedance MPVIC baseline; Table III reports the full ablation. The final D7 controller achieves near-zero steady-state error and sub-millimeter peak deflection, while MPVIC—though predictive—retains a visible steady-state offset.

B. Benchmark I: Circular Trajectory Under Step Force

The end-effector tracks a 12 cm radius circle in the XZ plane ($\omega = 2\pi/8 \text{ rad/s}$). A step force $F_h = [0, 0, -15] \text{ N}$ is applied from $t = 3\text{--}6 \text{ s}$ per 8 s cycle (3 cycles, 24 s total).

Key findings: (1) *Prediction is the dominant contributor here*: C4 reduces contact-window RMS from 41.1 mm to 2.2 mm (19 $\times$) over C1, validating the constant- A_d QP. (2) *Kalman achieves zero SS error*: C5 drives SS error to effectively zero ($<0.05 \text{ mm}$) — a 44.8 mm $\rightarrow \approx 0$ improvement over C1. (3) *Adapting the stiffness is not enough*: the predictive variable-impedance baseline MPVIC cuts contact-window RMS to 4.5 mm (beating all reactive baselines), but with the *same* estimate $\hat{d}$ as C5 it still leaves a 4.8 mm SS error, since a finite stiffness can only reach $e_\infty = -K^{*-1}\hat{d} \neq 0$ ($K^* \approx 3000 \text{ N/m} \Rightarrow 15/3000 \approx 5 \text{ mm}$); C5 removes it ($\sim 140\times$), showing the decisive ingredient is predictive *cancellation* (Theorem 2), not stiffness adaptation—the concrete separation from [15], [17]. (4) *Rate and estimation are orthogonal*: rate reduces ZOH transient; Kalman eliminates SS error; their

TABLE IV
FREE-SPACE CIRCLE TRACKING, $R = 12$ CM, $T = 8$ S

Plane	IMP RMSE [mm]	MPC RMSE [mm]	Improvement
XZ sagittal	23.54	0.24	$\times 97$
XY horizontal	25.06	0.33	$\times 77$
YZ frontal	16.25	0.20	$\times 79$
XZ $\rightarrow$ XY tilted	25.07	0.31	$\times 80$

TABLE V
BENCHMARK II — WAYPOINT-HOLD UNDER DIRECTIONALLY VARIED PUSH

Controller	WP	RMS free [mm]	RMS contact [mm]	Peak [mm]
G1 – Stiff Imp.	3/3	63.6	41.4	47.1
G2 – Pure Adm.	3/3	72.8	190.2	226.6
G3 – Var. Compl.	3/3	69.3	133.5	170.1
MPVIC – Var.-Imp.	3/3	51.1	5.0	5.9
G4 – MPC 100 Hz	3/3	47.8	2.2	2.6
G5 – MPC+K 100 Hz	3/3	47.7	0.6	2.5
G6 – MPC 500 Hz	3/3	52.6	0.9	1.0
G7 – MPC+K 500 Hz	3/3	52.1	0.2	0.7

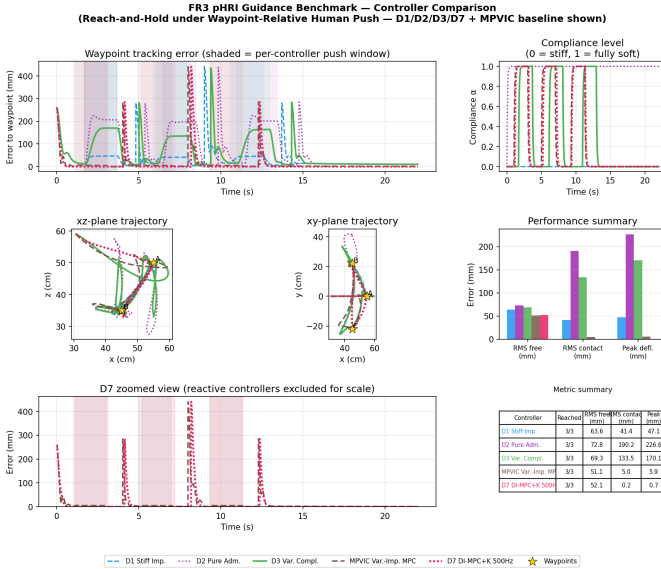


Fig. 2. Benchmark II — reach-and-hold under directionally varied push. For visibility the plot shows D1/D2/D3/D7 (corresponding to G1/G2/G3/G7) plus the predictive variable-impedance MPVIC baseline; Table V reports the full ablation. The final D7 controller reaches every waypoint with sub-millimeter contact-window deflection.

combination (C7) achieves best-in-class contact performance.

C. Four-Plane Circle Tracking

C5 is evaluated on four 3-D circle planes (Table IV).

D. Benchmark II: Reach-and-Hold under Human Push

The robot navigates a triangle of three waypoints (A, B, C) in one lap. At each waypoint, a directionally varied 15 N push fires for 2 s (3 push events, one per waypoint).

TABLE VI
BOUNDARY TEST, $R = 20$ CM CIRCLE

Controller	RMSE [mm]	Min margin	Result
IMP	26.97	0.048	LIMIT VIOLATION
MPC (C5, 100 Hz QP)	12.35	0.084	AVOIDED
MPC (C5, 30 Hz QP)	11.21	0.084	AVOIDED

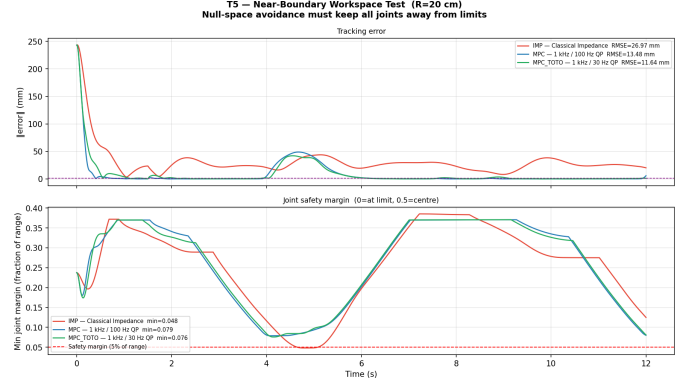


Fig. 3. Boundary test ($R = 20$ cm). Classical impedance violates the 5% joint margin; the dual-barrier MPC maintains a fractional joint margin ≥ 0.084 throughout. Elevated RMSE (12.4 mm) reflects the workspace projection intentionally offsetting p_d by up to 6 cm to maintain joint-limit clearance.

Analysis. The static-waypoint hold confirms the separation seen in Benchmark I. Against the stiff-impedance baseline (G1) the MPC cuts contact-window RMS from 41.4 to 2.2 mm and peak from 47.1 to 2.6 mm (G4); adding the Kalman augmentation improves the contact and free-motion metrics — G5 lowers contact RMS to 0.6 mm and slightly reduces peak (2.6 $\rightarrow$ 2.5 mm), so unlike a higher gain it carries no peak penalty. Raising the QP rate to 500 Hz sharpens the first-contact transient further (G7: 0.2 mm contact RMS, 0.7 mm peak), since the 2 ms ZOH window lets $\hat{d}$ converge before significant error builds. The predictive variable-impedance baseline (MPVIC) behaves oppositely to the reactive G3: it stiffens predictively to reject the push (contact RMS 5.0 mm, an order of magnitude below G1–G3) rather than softening, yet stays a further order of magnitude above the offset-free G5 (0.6 mm) — the same non-offset-free residual as in Benchmark I. Adapting the apparent stiffness, reactively or predictively, does not substitute for predictive disturbance cancellation.

E. Joint-Limit Safety

Table VI and Fig. 3 summarize the boundary circle test used to exercise joint-limit safety. The classical impedance baseline crosses the 5% joint-margin threshold, whereas the predictive controller with the dual-barrier mechanism maintains positive clearance throughout the run. The higher RMSE is intentional: the workspace projection trades tracking accuracy for joint-limit clearance near the edge of the reachable set.

F. Robustness to Measurement Noise and Model Mismatch

The architecture relies on a Kalman estimator (noise-sensitive) and on Layer-1 cancellation (model-sensitive), so

TABLE VII
ROBUSTNESS OF MPC+KALMAN (100 HZ QP)

(a) EE position noise — 10N step, SS error (5 seeds)			
noise 1σ	0 mm	1 mm	2 mm / 5 mm
SS err (mm)	0.08	$0.19 \pm .03$	$0.36 \pm .04$ / $0.89 \pm .07$
(b) Inertia mismatch — free-circle RMSE (mm)			
inertia error	0%	+10% / +20%	+30%
Kalman on	0.24	0.24 / 0.23	0.23
Kalman off	0.96	0.87 / 0.80	0.74

TABLE VIII
TIME-VARYING FORCE — HORIZON-PREDICTION ERROR AND TRACKING

L_d [N/s]	ε_1 [N]	ε_N [N]	$\varepsilon_N - \varepsilon_1$ [N]	$L_d N \Delta t$ [N]	RMS track [mm]
0.0 (const)	0.04	0.38	0.34	0.00	0.08
5.3	0.05	0.52	0.46	0.53	0.12
10.7	0.12	1.20	1.08	1.07	0.27
21.3	0.25	2.47	2.22	2.13	0.54
42.7	0.49	4.87	4.38	4.27	1.03

we stress both. The plant is always the true model; only the controller’s inputs (added EE-position noise) or its feedforward inertia (a scaled Λ) are perturbed.

(a) Even at an unrealistically large 5 mm (1σ) position noise the offset-free law holds steady-state error below 1 mm and the transient peak rises only from 1.6 to 2.2 mm: the integrating Kalman state averages out zero-mean sensor noise. (b) With the Kalman augmentation, free-space tracking RMSE is essentially invariant to $\pm 30\%$ feedforward-inertia error ($0.24 \rightarrow 0.23$ mm), because the resulting force error is slowly varying and absorbed by $\hat{d}$ — the empirical counterpart of the exactness remark (Section III). Disabling the Kalman exposes the mismatch (0.74–0.96 mm, a $3\text{--}4\times$ penalty), confirming that the disturbance state, not the nominal model, confers the robustness.

G. Time-Varying Interaction and Horizon-Prediction Validity

The benchmarks above apply constant or step forces. Because the framework targets *interaction* dynamics broadly, we additionally exercise a *time-varying* human force and directly measure the N -step disturbance-prediction RMS ε_N of Section III-D — the quantity bounding how well the flat random-walk prediction holds over the horizon, defined there but not previously reported. To isolate the force from the configuration-driven terms of (7), the robot holds a *static* target while a sinusoidal push $F_z = -A \sin(2\pi f t)$ of fixed amplitude $A = 12$ N and increasing frequency f sweeps the disturbance rate $L_d = A 2\pi f / \sqrt{2}$. The controller is the same DI-MPC + Kalman (C5, 100 Hz QP). Because the true disturbance $d(k)$ is not directly measurable, we use the filtered estimate $\hat{d}(k | k)$ as its proxy and the flat prediction $\hat{d}(k | k-N) = \hat{d}(k-N | k-N)$, so ε_N measures the N -step self-consistency of the estimate.

The measured horizon-extrapolation gap $\varepsilon_N - \varepsilon_1$ tracks the Section III-D bound term $L_d N \Delta t$ to within $\approx 10\%$ across a decade of disturbance rate (Table VIII), confirming the flat-prediction error is *linear in the force rate*, with a constant-force floor ≈ 0.38 N at the $f=0$ row — the process-noise-jitter e_K -analogue of (13). Tracking degrades gracefully: sub-millimeter up to $L_d \approx 21$ N/s — brisker than typical voluntary guidance — and ≈ 1 mm at 43 N/s, recovering the offset-free property (Theorem 2) as $f \rightarrow 0$. This validates the use of the flat random-walk model inside the receding-horizon loop; for a *structured* high-rate force (e.g. tremor) the harmonic-internal-model extension of Section III-D would predict that component forward exactly, removing it from L_d .

VII. DISCUSSION

Separation of concerns. Prediction (high QP rate) addresses transient peak deflection; estimation (Kalman) drives steady-state error to zero. These are orthogonal: neither alone achieves both; their combination (C7/G7) achieves best-in-class contact behavior in both benchmarks.

Constant A_d advantage. The feedforward cancellation enables Φ to be precomputed, the QP to have exactly 30 decision variables at all configurations and for all robot models, and warm-started OSQP to converge in under 0.5 ms in our simulation runs.

Platform generality. The controller requires only $M(q)$, $C\dot{q} + G(q)$, and $J_v(q)$, available from MuJoCo, Pinocchio, KDL, or any robot dynamics library.

VIII. CONCLUSION

Classical robot control predicts robot dynamics and treats contact as a disturbance; this paper argued instead that safe pHRI should be designed by predicting *interaction dynamics* directly: the closed-loop relation among commanded motion, human-applied force, actuator limits, joint limits, and passivity (Definition 1). This shift makes compliance, tracking, disturbance rejection, and safety emergent properties of one optimization over the interaction error rather than four separately designed modules. The proposed framework makes those dynamics explicit by using operational-space feedforward cancellation to expose a linear double-integrator backbone for the translational task. The nonlinear robot is still represented through measured dynamics, but its configuration dependence is confined to the input matrix $B_d(\rho_k)$, while the transition matrix and free-response structure remain fixed. This separation lets standard linear constrained-control tools be used with explicit assumptions: the prediction matrix Φ is precomputed, the online realization is a 30-variable convex QP, offset-free tracking follows from an input-centered augmented disturbance model, sampled joint-limit safety is enforced by a one-step torque CBF when feasible, and task-channel passivity is enforced by an energy-tank scaling layer.

The resulting controller should be viewed as one realization of the interaction-dynamics framework rather than as a replacement for all pHRI control modes. In the unconstrained and disturbance-free limit it recovers the conservative part

of classical task-space impedance; under constant or asymptotically constant bounded human force, Kalman augmentation removes steady-state bias when the stated stability and feasibility conditions hold; and because the transition matrix is configuration-independent, a single Lyapunov certificate guarantees exponential stability of the interaction error across the whole singularity-free workspace, not only at a fixed configuration (Theorem 3). MuJoCo simulation on a Franka FR3 model demonstrates a $>800\times$ steady-state-error reduction over classical impedance under a sustained 15 N force, $77\text{--}97\times$ RMSE reduction on free-space circles, empirical joint-limit safety behavior at the workspace boundary, and robustness to measurement noise and $\pm 30\%$ inertial mismatch. Because the interface requires only M , $C\dot{q} + G$, and J_v , the same framework can be ported to other torque-controlled serial arms by substituting the robot model and joint-limit parameters. The next validation step is real FR3 pHRI testing with synchronized tracking, force-estimation, CBF-residual, and energy-tank logs.

Looking further out, the value of an interaction-dynamics model with a configuration-independent transition matrix is not confined to impedance regulation. As embodied systems increasingly plan through learned world models, the physical layer—contact—remains their least data-efficient component. By reducing that layer to a fixed linear model with a single known input matrix, the backbone supplies an analytic dynamics prior on which a learned model need only capture the residual uncertainty of intent, contact, and environment. We therefore see interaction dynamics less as a single controller than as a candidate foundation for model-based physical AI: an analytic, predictive, safety-constrained dynamics substrate between a high-level foundation model and the robot’s torques.

REFERENCES

- [1] L. Villani and J. De Schutter, “Force control,” in *Springer Handbook of Robotics*, 2nd ed., B. Siciliano and O. Khatib, Eds. Springer, 2016, pp. 195–220.
- [2] A. Albu-Schäffer, C. Ott, and G. Hirzinger, “A unified passivity-based control framework for position, torque and impedance control of flexible joint robots,” *Int. J. Robot. Res.*, vol. 26, no. 1, pp. 23–39, 2007.
- [3] S. Haddadin, A. Albu-Schäffer, and G. Hirzinger, “Requirements for safe robots: Measurements, analysis and new insights,” *Int. J. Robot. Res.*, vol. 28, no. 11–12, pp. 1507–1527, 2009.
- [4] O. Khatib, “A unified approach for motion and force control of robot manipulators: The operational space formulation,” *IEEE J. Robot. Autom.*, vol. 3, no. 1, pp. 43–53, 1987.
- [5] B. Siciliano, L. Sciavicco, L. Villani, and G. Oriolo, *Robotics: Modelling, Planning and Control*. Springer, 2009.
- [6] N. Hogan, “Impedance control: An approach to manipulation—Parts I–III,” *ASME J. Dyn. Syst. Meas. Control*, vol. 107, no. 1, pp. 1–24, 1985.
- [7] S. Chiaverini, B. Siciliano, and L. Villani, “A survey of robot interaction control schemes with experimental comparison,” *IEEE/ASME Trans. Mechatronics*, vol. 4, no. 3, pp. 273–285, 1999.
- [8] Y.-Y. Cao, Z. Lin, and D. G. Ward, “Anti-windup design of output tracking systems subject to actuator saturation and constant disturbances,” *Automatica*, vol. 40, no. 7, pp. 1221–1228, Jul. 2004.
- [9] —, “An antiwindup approach to enlarging domain of attraction for linear systems subject to actuator saturation,” *IEEE Trans. Autom. Control*, vol. 47, no. 1, pp. 140–145, Jan. 2002.
- [10] D. Q. Mayne, J. B. Rawlings, C. V. Rao, and P. O. M. Scokaert, “Constrained model predictive control: Stability and optimality,” *Automatica*, vol. 36, no. 6, pp. 789–814, 2000.
- [11] D. Q. Mayne, “Model predictive control: Recent developments and future promise,” *Automatica*, vol. 50, no. 12, pp. 2967–2986, 2014.
- [12] G. Pannocchia and J. B. Rawlings, “Disturbance models for offset-free model-predictive control,” *AIChE Journal*, vol. 49, no. 2, pp. 426–437, 2003.
- [13] Y. Cao, K. Cheng, and G. Li, “Passive model-predictive impedance control for safe physical human–robot interaction,” *IEEE Trans. Cogn. Dev. Syst.*, 2023.
- [14] K. Haninger, M. Hegeler, and L. Peternel, “Model predictive impedance control with Gaussian processes for human and environment interaction,” *Robotics Autonomous Syst.*, vol. 165, p. 104431, 2023.
- [15] L. Roveda, N. Iannacci, F. Vicentini, N. Pedrocchi, F. Braghin, and L. M. Tosatti, “Optimal impedance via model predictive control for robot-aided rehabilitation,” *Control Eng. Practice*, vol. 83, pp. 11–23, 2019.
- [16] C. Wu *et al.*, “Ensuring safe physical HRI: Integrated MPC and ADRC for interaction control,” *Actuators*, vol. 14, no. 12, p. 608, 2025.
- [17] X. Liu *et al.*, “Model predictive variable impedance control towards safe robotic interaction in unknown disturbance-rich environments,” *Robotics Autonomous Syst.*, vol. 190, p. 104991, 2025.
- [18] R. Ikeura and H. Inooka, “Variable impedance control of a robot for cooperation with a human,” in *Proc. IEEE ICRA*, 1995, pp. 3097–3102.
- [19] Y.-Y. Cao and Z. Lin, “Min–max MPC algorithm for LPV systems subject to input saturation,” *IEEE Proc. Control Theory Appl.*, vol. 152, no. 3, pp. 266–272, May 2005.
- [20] H. Sadeghian, L. Villani, M. Keshmiri, and B. Siciliano, “Task-space control of robot manipulators with null-space compliance,” *IEEE Trans. Robot.*, vol. 30, no. 2, pp. 493–506, 2014.
- [21] Franka Robotics GmbH, “Franka research 3 (FR3) technical documentation,” 2023, <https://frankaemika.github.io/docs>.
- [22] L. Sentis and O. Khatib, “Synthesis of whole-body behaviors through hierarchical control of behavioral primitives,” *Int. J. Humanoid Robotics*, vol. 2, no. 4, pp. 505–518, 2005.
- [23] B. Stellato, G. Banjac, P. Goulart, A. Bemporad, and S. Boyd, “OSQP: An operator splitting solver for quadratic programs,” *Math. Program. Comput.*, vol. 12, no. 4, pp. 637–672, 2020.
- [24] Google DeepMind, “MuJoCo menagerie: A collection of physics-based simulation models,” GitHub, 2022, https://github.com/google-deeppmind/mujoco_menagerie.
- [25] E. Todorov, T. Erez, and Y. Tassa, “MuJoCo: A physics engine for model-based control,” in *Proc. IEEE/RSJ IROS*, 2012, pp. 5026–5033.